

# Profile- double cylinder eCLIQ

## N531,VAR=1901508



Especially suited for steel doors/steel security fittings with 17 mm drilling (without profile cutouts) - without keys

### Product description


- Power is supplied exclusively via the key (no battery in the cylinder)
- Available as rotary secured or electronical version (V=)
- Other side can feature an electronic or rotary-secured design
- Brass cylinder housing components
- Front surface shortened (diameter 16.6 ±0.1 mm). Available on one or both sides (VAR=1901508-5-FRONT/NORM, 1901508-5-NORM/FRONT, 1901508-7-FRONT/FRONT)
- Standard finish, satin nickel-plated (OF=MV)
- Basic cylinder length 61 mm (C) - A/B (L=30/30) - other installation lengths available - flexible modular system
- Optional, differing basic cylinder length of 56 mm (C) - A/B (L=28/28)
- Standard locking cam position (SST=30°); differing locking bit position available, optionally available with SST=FLEX
- Optionally available with double locking cam (VAR=K901310-X-BIFFAR)
- Both side locking (GE=BS) and 360° free-wheeling function as standard
- Cam made of break-proof, corrosion-resistant stainless steel
- Maintenance-free cylinder
- Splash-proof IP54
- Dust and rain protection cap available for one or both sides (SUR=3/-, -/3, 3/3) IP55
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G Ex ib IIC T4 Gb)

### Scope of delivery

- 1 profile-double cylinder
- 1 cylinder fixing screw M5 x 85 mm

### Variants that can be ordered

| Article number   | VAR=                  | V=  |
|------------------|-----------------------|-----|
| N531,VAR=1901508 | 1901508-5-FRONT/NO RM | D/D |
|                  | 1901508-5-NORM/FRONT  | D/D |
|                  | 1901508-7-FRONT/FRONT | D/D |
|                  | 1901508-5-FRONT/NO RM | E/D |
|                  | 1901508-5-NORM/FRONT  | E/D |
|                  | 1901508-7-FRONT/FRONT | E/D |
|                  | 1901508-5-FRONT/NO RM | D/E |
|                  | 1901508-5-NORM/FRONT  | D/E |
|                  | 1901508-7-FRONT/FRONT | D/E |
|                  | 1901508-5-FRONT/NO RM | E/E |
|                  | 1901508-5-NORM/FRONT  | E/E |
|                  | 1901508-7-FRONT/FRONT | E/E |

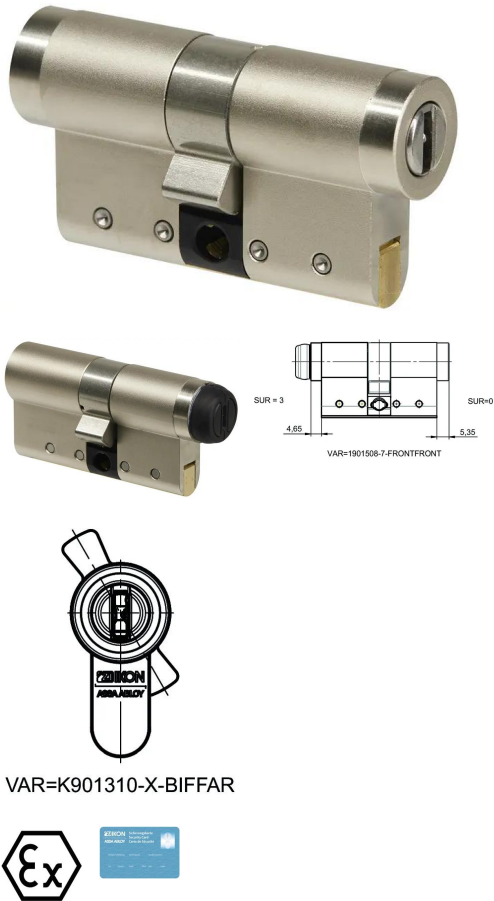

VAR=K901310-X-BIFFAR

