



Switch cylinder NC52

Diameter 20 mm for electric rotary switches with multiple withdrawal positions
-without key-

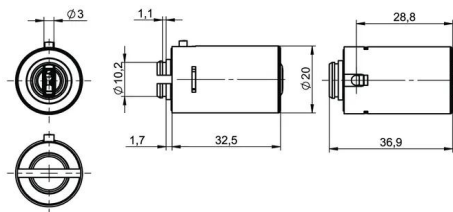

Product description

- Power is supplied exclusively via the key (no battery in the cylinder)
- Available as rotary secured or electronical version (V=)
- Standard finish, satin nickel-plated (OF=MV)
- Diameter 20 mm
- For electric rotary switch with multiple withdrawal positions of various manufacturers
- Key withdrawal in every resting position
- Up to 12 resting positions possible
- Display of switching position by the keyway
- Maintenance-free cylinder
- Splash-proof IP54
- Dust and rain cover available (SUR=1) IP55
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G Ex ib IIC T4 Gb)

Scope of delivery

- 1 switch cylinder

Ordering Information

- Electric rotary switch not included

Variants that can be ordered

Article number	OF=	AUS=	V=
NC52	MV	1	E