



# Locking cylinder eCLIQ NC31

23 mm diameter, laterally flattened - without key

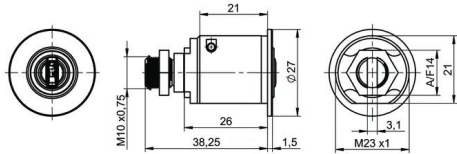

## Product description

- Power is supplied exclusively via the key (no battery in the cylinder)
- Available as electrical version (V=)
- Standard finish, satin nickel-plated (OF=MV)
- Maintenance-free cylinder
- Splash-proof IP54
- Dust and rain cover available (SUR=1) IP55
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G Ex ib IIC T4 Gb)

## Scope of delivery

- 1 locking cylinder

## Note

- Standard length of casing 26 mm (L=26), optionally 30 mm (L=30) available

## Ordering Information

- The locking levers (KESO order numbers E.270 and E.275) are not included

## Variants that can be ordered

| Article number | OF= | AUS= | V= |
|----------------|-----|------|----|
| NC31           | MV  | 1    | E  |