


Key + CLIQ S110,V=E3PLUS5000

Electromechanical user key "Remote"

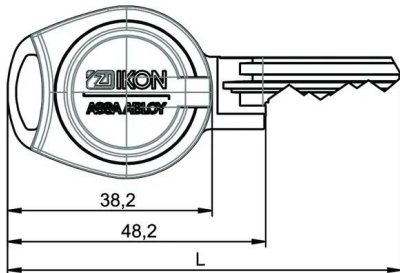

Overview of Advantages

- Ideal in combination with the wall programming devices and the mobile programming device
- Option to programme accesses directly without connecting the cylinder if the cylinder is set beforehand

Product description

- For IKON locking systems in the systems TK5, SK5, SK6, TK6, SK7
- Key and locking system encryption
- Optical display and acoustic signalling for access authorisation und battery status
- The data and power transmission to the cylinder is contact based
- The data transmission to the cylinder is highly encrypted
- Temperature range 0° C to +70° C
- Splash-proof
- Power supply via commercially-available lithium battery (CR2032) for approx. 30,000 locking events (approx. 3 year shelf life)
- The battery can be easily changed by the user without tools
- Additionally with time function and event memory for the last 1,000 locking actions
- Key memory capacity 5,000 cylinder / cylinder groups
- Option to programme accesses directly without connecting the cylinder if the cylinder is set beforehand
- Saves programming procedures
- Ideal in combination with the wall programming devices and the mobile programming device
- Standard colour for battery cover: black (RD=SW)
- Other colours for battery cover: blue (RD=BL) and red (RD=RT)
- Optionally available with a RFID tranponderchip (AUS=LEGIC PRIME, AUS=LEGIC ADVANT, AUS=MIFARE CLASSIC, AUS=MIFARE DESFIRE EV1 or AUS=EM4102) integrated in the battery cover
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (Ex II 2G) ATEX=II 2G Ex ib IIB T4 Gb

Scope of delivery

- 1 electromechanical user key including battery

Note

- The colour of the CZ02,AUS=0 key battery cover can be adjusted with order or retroactively. Available colours: red (RT) and blue (BL)

Variants that can be ordered

Article number	RD=
S110,V=E3PLUS5000	SW
	BL
	RT