


## Locking cylinder eCLIQ N3.037

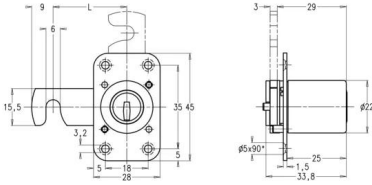

## Product description

- Available as rotary secured or electrical version (V=)
- Standard finish, satin nickel-plated (OF=MV)
- 22 mm diameter
- Maintenance-free cylinder
- Splash-proof IP54
- Dust and rain cover available (SUR=1) IP55
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G Ex ib IIC T4 Gb)
- Also available with round fixing plate
- Key rotation stroke: 360°
- Deadbolt rotation stroke: 90°
- Locking cylinder with a fixed rectangular screw-on plate for lateral cabinets, sliding doors, hatches, office furniture, etc.

## Scope of delivery

- 1 Locking cylinder with rectangular fixing plate (standard)
- 1 Striker G.257