
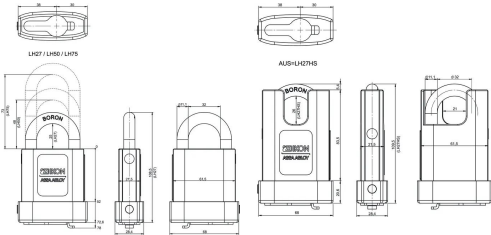


# Cylinder padlock eCLIQ N319

For extreme weather conditions, with forced locking - key can only be extracted when locked -without key-

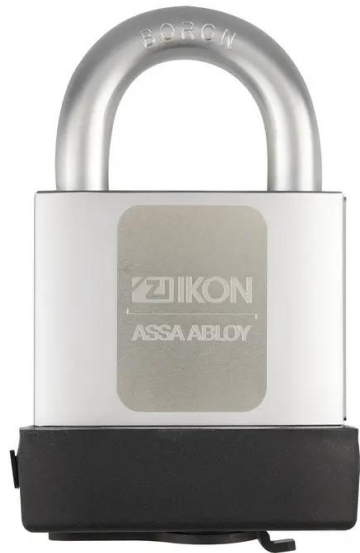

## Overview of Advantages

- Extreme protection against dirt, water and variations in temperature

## Product description

- Power is supplied exclusively via the key (no battery in the cylinder)
- Available as electronic version (V=)
- Standard versions without high shoulder clear frame heights (AUS=LH27, LH50, LH75)
- Optional high shoulder clear height bracket version (AUS=LH27HS)
- Steel shackle available in 11.1 mm, hardened and chrome-plated
- Steel case hardened
- According to DIN EN 16864 class 4 as standard
- With a lateral M5 thread for attaching a protective cover
- Cylinder without dust and rain protection cap as standard (SUR=0)
- Cylinder optionally equipped with dust and rain protection cap (SUR= 3)
- Padlock equipped with silicone protective cap as standard
- Excellent protection against dampness and dirt, IP67
- Temperature range from -25°C to 85°C
- Maintenance-free cylinder
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G Ex ib IIC T4 Gb)

## Scope of delivery

- 1 cylinder padlock with silicon protection cap

## Variants that can be ordered

Article number	OF=	V=	AUS=
N319	MC	E	LH27
	MC	E	LH27HS
	MC	E	LH50
	MC	E	LH75