

# Profile half cylinder CLIQ® Go

## N532,VAR=1901508,SERVICE=CLIQGo

Particularly suitable for use in operating panels, e.g. in lifts -without key-

### Overview of Advantages

- Particularly suitable for use in operating panels, e.g. in lifts

### Product description



- Available as rotary secured or electronical version (V=)
- Brass cylinder housing components
- Front surface shortened (diameter 16.6 ±0.1 mm)
- Basic cylinder length 30 mm (A) (L=30)
- Standard finish, satin nickel-plated (OF=MV)
- Standard locking cam position 45°; differing locking cam positions available in 30° and 45° steps
- Standard with rigid connection (VAR=STARR) and free adjustable locking cam set to 45° (SST=FLEX). Differing locking cam positions available
- Free-wheeling function only without VAR=STARR
- Cam made of break-proof, corrosion-resistant stainless steel
- Maintenance-free cylinder
- Splash-proof IP54
- Dust and rain cover available (SUR=3) IP55

### Scope of delivery

- 1 profile half-cylinder
- 1 cylinder fixing screw M5 x 85 mm

### Variants that can be ordered

| Article number                      | VAR=    | V= |
|-------------------------------------|---------|----|
| N532,VAR=1901508,<br>SERVICE=CLIQGo | 1901508 | D  |
|                                     | 1901508 | E  |

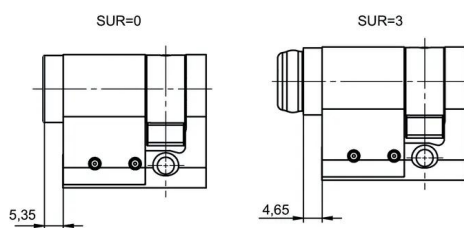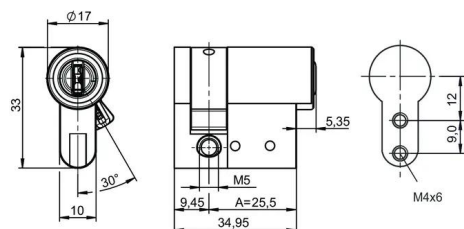

VAR=1901508-5-FRONT