

Escape door fittings according to EN179

Experience a safer
and more open world


The EN179 regulates the requirements and test methods for locks and fittings for use as emergency exit locks with handles or push plates for doors in escape routes.

Fitting combinations within the meaning of EN179 are to be assessed as building authority relevant products with the required EU or CE conformity marking. They consist of lock, fittings and accessories and must be tested and certified together.

ASSA ABLOY offers you a wide and comprehensive range of products with the corresponding tests and certifications for the hardware packages approved in combination with the EN179 standard.

In this overview you will find an extensive selection of ASSA ABLOY fittings, certified and monitored by MPA NRW under the surveillance number DO 22.0-03, which meet the requirements of EN179.

Relevant dimensions according to EN179

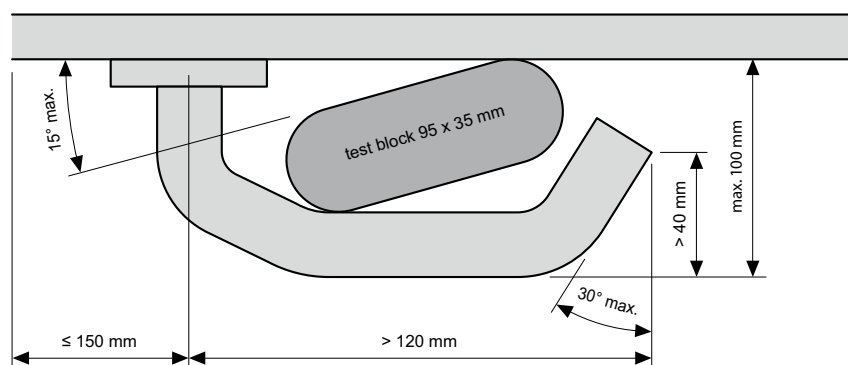

DIN EN 179

The handle models listed on the following page are available both as handle sets and knob sets on the following substructures:

- Rose fitting
- Short plate fitting
- Long plate fitting
- Oval rose fitting
- Long plate fitting for tubular frame doors
- Security fittings for wide style and narrow style doors

