


Architectural hardware from ASSA ABLOY

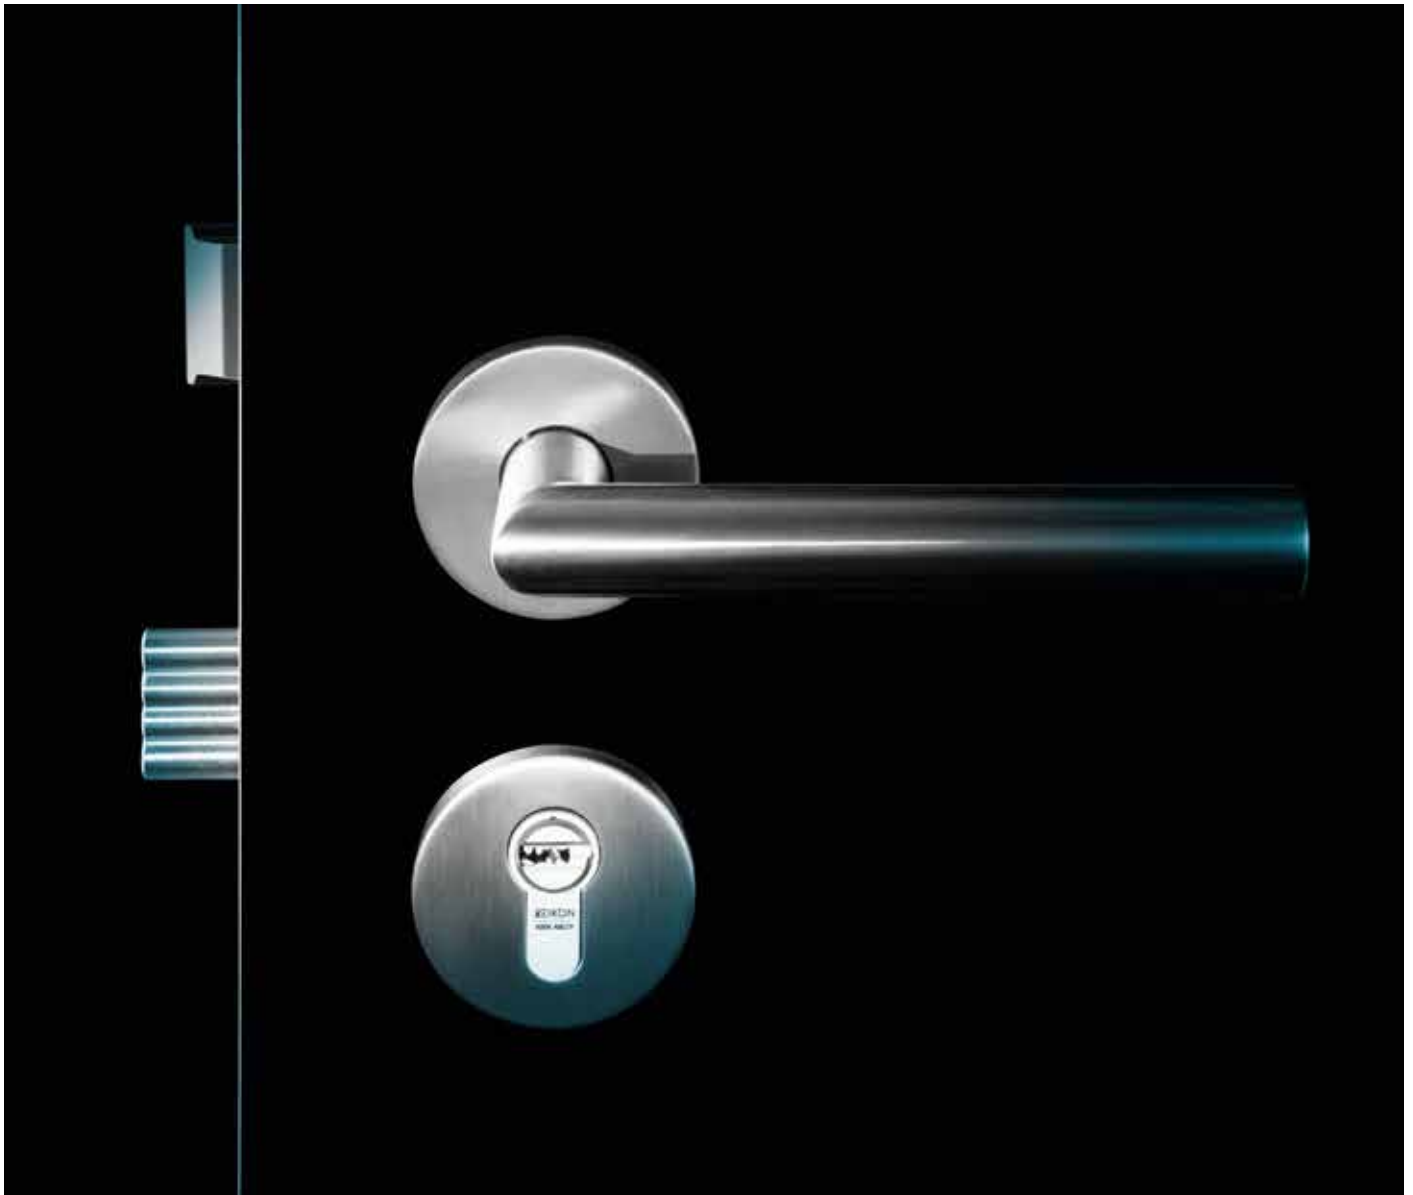

The AHW programm
from ASSA ABLOY

ASSA ABLOY

Experience a safer
and more open world

Unlock your life!

ASSA ABLOY
Opening Solutions

Behind the trendsetting security products, there is the name of ASSA ABLOY, a guarantee for experience and expertise.

This Swedish group was founded in 1994 and grew into one of the world's leading security technology and locking system groups as a result of its targeted acquisition policy.



Synonymous with security

ASSA ABLOY Sicherheitstechnik GmbH

ASSA ABLOY
Opening Solutions



Elbphilharmonie Hamburg



HafenCity University Hamburg



Bauhaus Dessau



Stuttgart City Library

ASSA ABLOY Sicherheitstechnik GmbH is your professional partner worldwide in mechanical and electro-mechanical security solutions for safety, security and convenience in buildings.

The company develops, produces and markets high-quality products and multi-purpose systems under the established IKON and effeff brand names for the private, commercial and public sectors.

ASSA ABLOY Sicherheitstechnik is considered a highly competent and reliable partner by its clients. This security company wins through due to its comprehensive know-how, state-of-the-art technology, creative ideas and innovative production processes. Besides comprehensive system solutions for the private and commercial security sectors, ASSA ABLOY Sicherheitstechnik also offers its customers a whole range of services, expert guidance and solution concepts for individual requirements and special applications.

The security expert solutions can be found in many buildings and facilities, ranging from the Olympic Stadium in Berlin through to the Nürnberger Versicherungen Arena up to the Elbe Philharmonic Hall in Hamburg. IKON and effeff products are also used worldwide – from Beijing through Dubai up to London.

We assist you with words and deeds

The experts at ASSA ABLOY Sicherheitstechnik would be pleased to advise you which electric strike model is most suitable for which installation position.

Hotline Technical advice

+49 7431 123-381

Hotline Sales / Order processing

+49 7431 123-700

Technical advice

In terms of technical advice with us, you will be supported by professionals who will continue to help you on every question on technical details. Of course you can also be put into contact with specialists regarding of technical risk assessments or key accounts.

Customer Service Sales / Order processing

With our commercial customer services you can clarify all questions relating to your purchase order, for example the status of the order processing, the delivery date, purchase order changes, but also returns or guarantee issues. Use this simple and quick option to get information or help from our specialists. We will do that with pleasure.



Training

With the ASSA ABLOY Academy, we offer you a free eLearning tool. Learn whenever and wherever you want: www.assaabloy.com/de → Section **Service**.

Exhibitions

You will find effeff at many national and international exhibitions. You can obtain the exact dates from our website: www.assaabloy.com/de

Our product catalogue online at www.assaabloy.com/de


Fast and up-to-date
comprehensive product
information at any time

1
Clearly arranged layout
according to our different
product areas...

2
the submenu will help
you navigate through our
database ...

3
... to find the model you
need.

4
By just clicking on
„Download for Product“,
you can generate a
detailed specification
sheet.

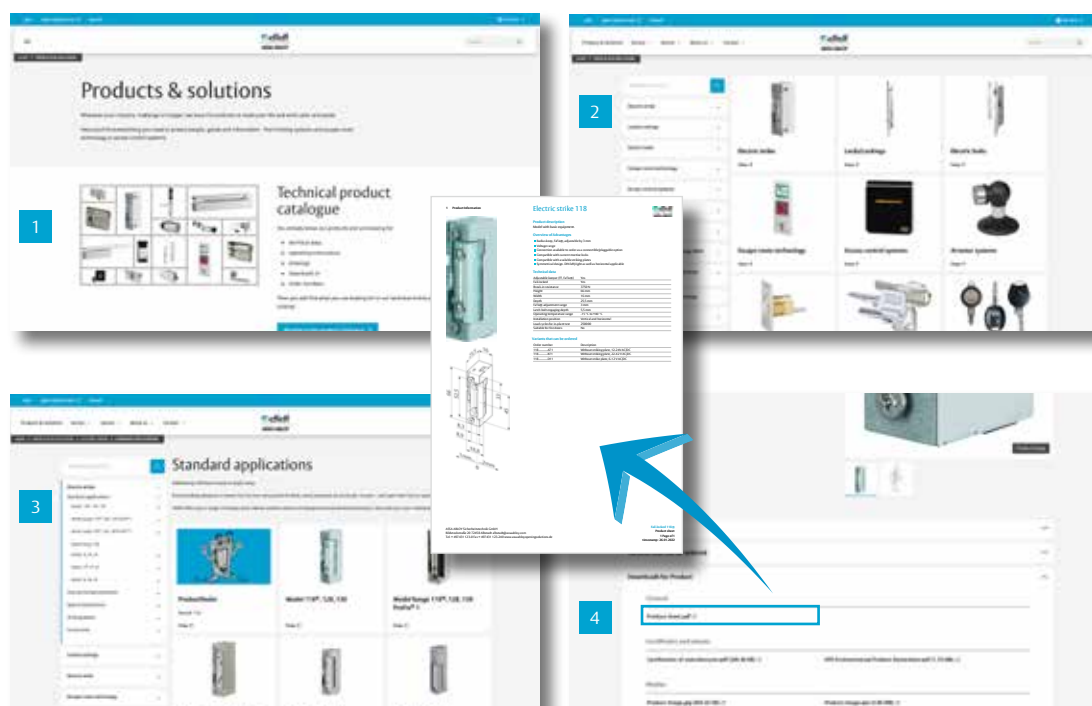

About us	2 – 3
Service, Support und Internet	4
Introduction to project fittings	6 – 11
Fittings for wide style doors	
Standard fittings	12 – 26
Panic fittings	27 – 32
Fire protection fittings	33 – 56
Security fittings	57 – 68
Standard fittings as half-set	69 – 70
Fire protection fitting with panic handle	71 – 73
Fittings for narrow style doors	
Fire protection fittings	75 – 91
Security fittings	92 – 118
Accessories	
Mounting sets	120 – 134
Panic spindle and rose set	135 – 136
Explanations	
Legal notices on standards and classifications	138
Classification key for DIN EN 1906	139
Item no. incl. classification key	140 – 145
Manufacturer for escape door fittings in accordance with EN 179	146 – 147
Everything fits: Components and systems for every door	148 – 149
Order form	150

Project fittings and their application areas

ASSA ABLOY property fittings are the ideal complement to our locks in public buildings and properties such as department stores, industrial or office complexes. They impress with their functional and extremely high-quality and durable design. They are especially used when high demands are placed on safety (escape routes) and security (intrusion protection).

ASSA ABLOY project fittings meet high security requirements, such as:

- All fittings are certified in accordance with EN 1906.
- Fittings for fire doors are suitable for use on fire and smoke protection doors in accordance with DIN 18273
- Fittings with panic handle meet the requirements of EN 179
- In addition to the aforementioned standards, all protection fittings meet the requirements for intrusion resistance in accordance with EN 1906 up to a maximum of SK 4

Note:

For explanations of the relevant standards, see at the end of the catalogue



Standard project fittings

The standard project fittings for wide style doors are ideal for equipping doors that are not subject to fire protection requirements and are not along escape routes. The fittings are made of extremely resistant and corrosion-resistant stainless steel. The high-quality workmanship ensures the longevity of the fittings. The fittings are available as rose fittings and long plate fittings and are certified in accordance with EN 1906.



Escape door fittings

If a door is along an escape route, a corresponding fitting is prescribed. Our panic fittings fully comply with the requirements of EN 179 and are therefore ideal for all areas of use where protection of life and limb is required.



Fire protection fittings with escape door handle


ASSA ABLOY fire protection fittings combine panic function in accordance with EN 179 and compliance with fire protection requirements in accordance with DIN 18273 (appropriate system fire protection certificate required).

Project fittings and their application areas



Security fittings

Our security fittings are the premium class of fittings. Available up to protection rating 4 in accordance with EN 1906, they ensure the best possible protection against forced entry into a building. In the highest protection ratings, high-strength connections and solid stainless steel plates are combined with hardened drilling protection plates to further strengthen the protective effect of the lock and door. They are just as elegantly integrated into the building as fittings without a protection rating. In addition, all security fittings are also suitable for escape doors and fire doors. This makes the security fittings the perfect closure for facade doors or intermediate doors with restricted access.

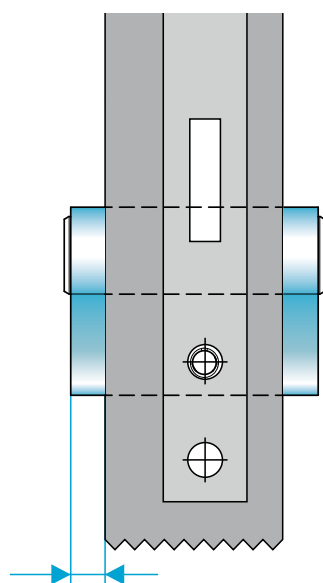

Cylinder protrusion

Determination of cylinder protrusion for fittings with cylinder cover. The protrusion is measured from the door leaf.

Cylinder protrusion for fittings with protective cover

For SK2 outside: ZA 10 – 18 mm
Inside: ZA 10.5 mm


For SK3 outside: ZA 12 – 18 mm
Inside: ZA 10.5 mm

For SK4 outside: ZA 8 – 10 mm
inside: ZA 10 mm

Project fittings


Handle shapes and dimensions

ASSA ABLOY handle shapes are available as welded bevel handles or curved round tube shape. In both design lines, we offer handle shapes suitable for EN 179 for escape doors to perfectly complement your property.

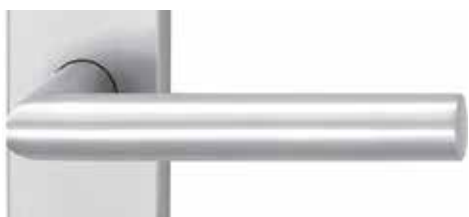


L-shaped

The elegantly bevel handles are ideal for properties where timeless design is a priority. The welded stainless steel tube combines high strength with an appealing design that invites touching. The model is an interpretation of a door handle designed back in the 1920s.

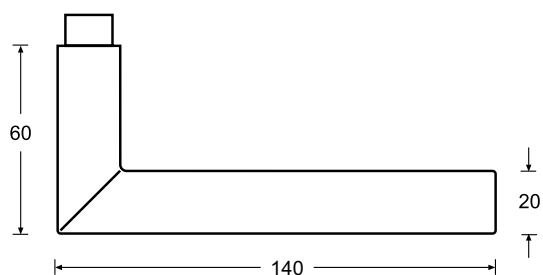


J-shaped:

The elegantly curved stainless steel handles impress with their radii and proven design. The handle, which is bent from a single piece, discreetly integrates into any door. The shape also makes it easy to configure for different door thicknesses.

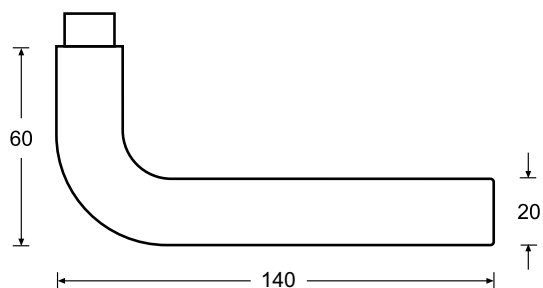

Project fittings


Handle shapes and dimensions

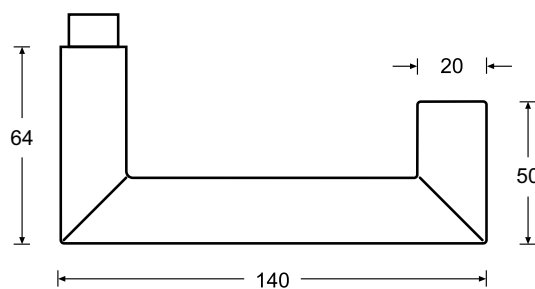

C-shaped

For handles used on doors along escape routes, a special shape is required to ensure the safety of people escaping.

ASSA ABLOY handles in the C-shaped version meet this requirement in every respect. As an extension of the elegant L-shape, functionality and compliance with regulations can be implemented easily and discreetly.

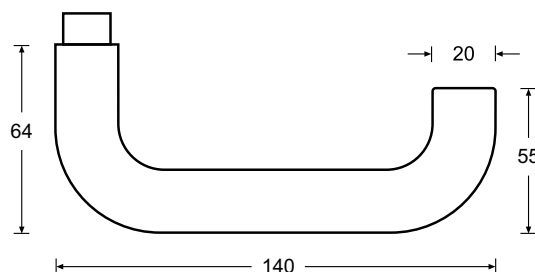

U-shaped

For handles used on doors along escape routes, a special shape is required to ensure the safety of people escaping.

Handles from ASSA ABLOY in the U-shaped version meet this requirement in every respect.

As an extension of the elegant J-shape, functionality and compliance with regulations can be implemented easily and discreetly.


Project fittings

Knob shapes and offset shapes

Dimensional drawings


We also offer you the choice with the half spindle fittings: to match the handle designs: classic round or modern flat.

For fittings on narrow profiles, we also offer offset handles in the narrow style area. If a half spindle fitting with offset handle is desired, this is also supplied with a corresponding offset knob.

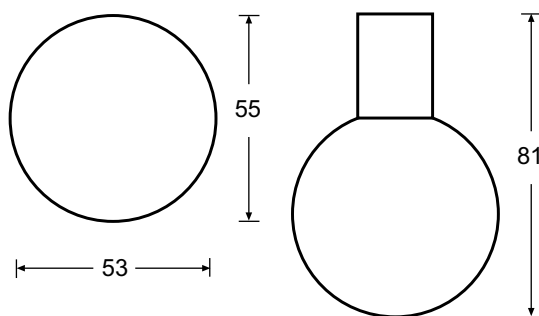

Round knob:

In the case of half spindle fittings, a knob is fitted on the outside to open or close the door. The round knob can be easily gripped from any position and offers good grip at all times.

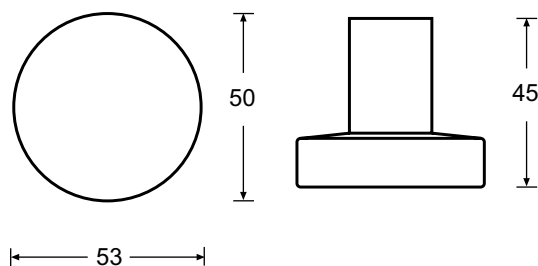

Flat knob:

The flat knob offers a modern but also timeless design. Instead of a ball, an ergonomically optimised metal disc is used. Thanks to its flat shape, the knob not only sits lower on the door leaf, but also provides an excellent grip for operating the door. This knob shape is particularly recommended if not only an elegant design, but also a high level of functionality is required: if there is only little space available when opening the door from outside, the door can be opened a few degrees further due to the low construction height of the knob.

Project fittings





Knob shapes and offset shapes

Dimensional drawings



Offset handles and knobs:

Doors with particularly low backsets are often at risk of crushing when the door is actuated. Offset handles move the handle area out of the danger zone.

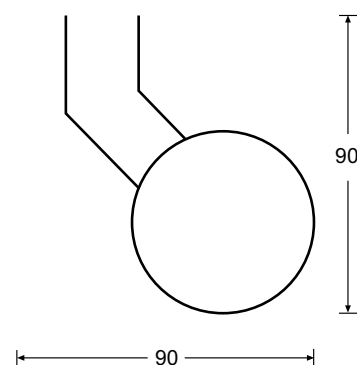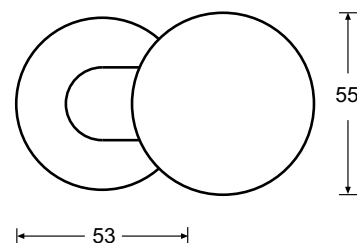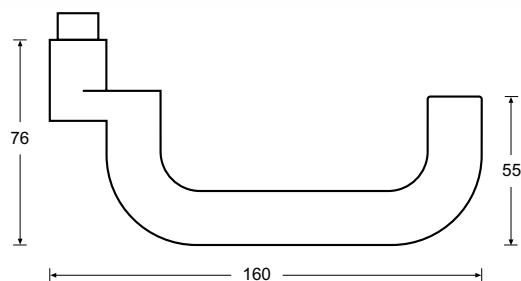
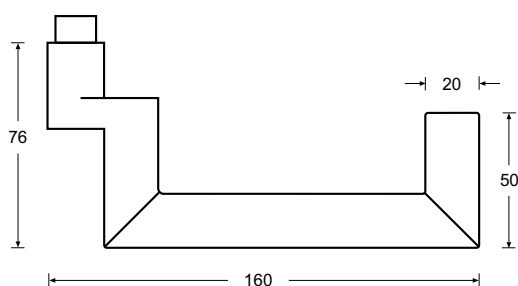




Fittings for wide style doors

Standard fittings for wide style doors

on rose, with L-shaped handle and outside handle

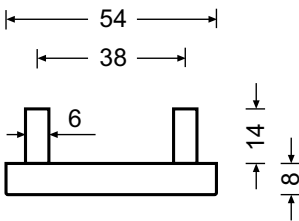

Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle

Notice


- Compatible with locks of series N1000

Technical attributes	
Exterior escutcheon	Handle
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L/R with spring assist door leaf thickness 37-50mm	H 3 0 1 0 0 1 X 0 8 0 1 0 0 0
PC rose SK0 8mm spindle DIN L/R with spring assist door leaf thickness 51-60mm	H 3 0 1 0 0 1 X 0 8 0 2 0 0 0
PC rose SK0 8mm spindle DIN L/R with spring assist door leaf thickness 61-70mm	H 3 0 1 0 0 1 X 0 8 0 3 0 0 0
PC rose SK0 8mm spindle DIN L/R with spring assist door leaf thickness 71-80mm	H 3 0 1 0 0 1 X 0 8 0 4 0 0 0
PC rose SK0 8mm spindle DIN L/R with spring assist door leaf thickness 81-90mm	H 3 0 1 0 0 1 X 0 8 0 5 0 0 0
PC rose SK0 8mm spindle DIN L/R with spring assist door leaf thickness 91-100mm	H 3 0 1 0 0 1 X 0 8 0 6 0 0 0

Standard fittings for wide style doors

on rose, with L-shaped handle and round knob

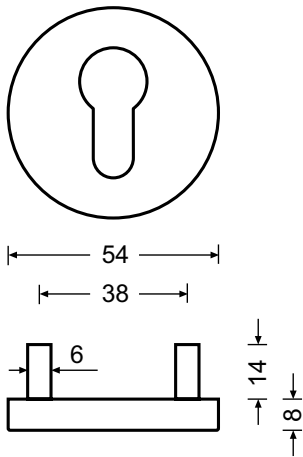

Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle


Notice

- Compatible with locks of series N1000

Technical attributes	
Exterior escutcheon	Round knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Rose


Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L door leaf thickness 37-50mm	H 3 0 1 0 1 1 X 0 8 1 1 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 51-60mm	H 3 0 1 0 1 1 X 0 8 1 2 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 61-70mm	H 3 0 1 0 1 1 X 0 8 1 3 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 71-80mm	H 3 0 1 0 1 1 X 0 8 1 4 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 81-90mm	H 3 0 1 0 1 1 X 0 8 1 5 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 91-100mm	H 3 0 1 0 1 1 X 0 8 1 6 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 37-50mm	H 3 0 1 0 1 1 X 0 8 2 1 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 51-60mm	H 3 0 1 0 1 1 X 0 8 2 2 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 61-70mm	H 3 0 1 0 1 1 X 0 8 2 3 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 71-80mm	H 3 0 1 0 1 1 X 0 8 2 4 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 81-90mm	H 3 0 1 0 1 1 X 0 8 2 5 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 91-100mm	H 3 0 1 0 1 1 X 0 8 2 6 0 0 0

Standard fittings for wide style doors on rose, with L-shaped handle and flat knob



54

38



6

14

8

Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle

Notice

- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Rose



Article / Feature

Order no.

PC rose SK0 8mm spindle DIN L door leaf thickness 37-50mm	H 3 0 1 0 2 1 X 0 8 1 1 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 51-60mm	H 3 0 1 0 2 1 X 0 8 1 2 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 61-70mm	H 3 0 1 0 2 1 X 0 8 1 3 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 71-80mm	H 3 0 1 0 2 1 X 0 8 1 4 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 81-90mm	H 3 0 1 0 2 1 X 0 8 1 5 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 91-100mm	H 3 0 1 0 2 1 X 0 8 1 6 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 37-50mm	H 3 0 1 0 2 1 X 0 8 2 1 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 51-60mm	H 3 0 1 0 2 1 X 0 8 2 2 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 61-70mm	H 3 0 1 0 2 1 X 0 8 2 3 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 71-80mm	H 3 0 1 0 2 1 X 0 8 2 4 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 81-90mm	H 3 0 1 0 2 1 X 0 8 2 5 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 91-100mm	H 3 0 1 0 2 1 X 0 8 2 6 0 0 0

Standard fittings for wide style doors

on rose, with J-shaped handle and outside handle



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle

Suitable mounting set

- Mounting set 1a in the chapter „Accessories“



Notice

- Compatible with locks of series N1000

Technical attributes	
Exterior escutcheon	Handle
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L/R with spring assist	H 3 0 2 0 0 1 X 0 8 0 0 0 0 0

Standard fittings for wide style doors on rose, with J-shaped handle and round knob



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle

Suitable mounting set

- Mounting set 1c in the chapter „Accessories“

Notice

- Compatible with locks of series N1000

Technical attributes



Exterior escutcheon	Round knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L	H 3 0 2 0 1 1 X 0 8 1 0 0 0 0
PC rose SK0 8mm spindle DIN R	H 3 0 2 0 1 1 X 0 8 2 0 0 0 0

Standard fittings for wide style doors

on rose, with J-shaped handle and flat knob



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle

Suitable mounting set

- Mounting set 1c in the chapter „Accessories“

Notice

- Compatible with locks of series N1000

Technical attributes	
Exterior escutcheon	Flat knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L	H 3 0 2 0 2 1 X 0 8 1 0 0 0 0
PC rose SK0 8mm spindle DIN R	H 3 0 2 0 2 1 X 0 8 2 0 0 0 0

Standard fittings for wide style doors

on long plate, with L-shaped handle and outside handle



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Prepared for your door thickness
- Elegant bevel handle

Notice

- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Handle
Protection rating	0 / 2
Handle	L-shaped
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

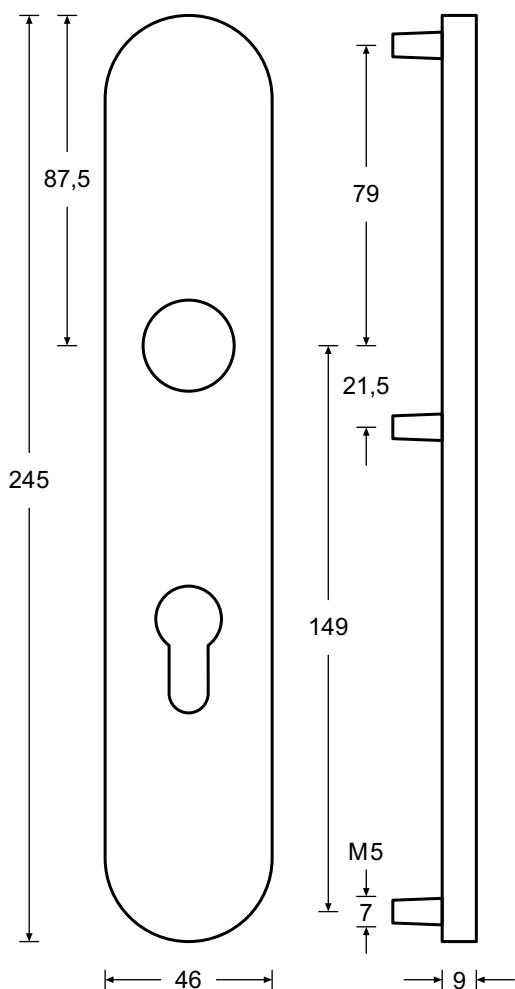

Article / Feature	Order no.
PC 72 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 36-49mm	H 331 001 10801000
PC 72 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 50-59mm	H 331 001 10802000
PC 72 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 60-69mm	H 331 001 10803000
PC 72 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 70-79mm	H 331 001 10804000
PC 72 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 80-89mm	H 331 001 10805000
PC 72 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 90-99mm	H 331 001 10806000
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 331 001 12831000
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 331 001 12832000
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 331 001 12833000
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 331 001 12834000
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 331 001 12835000
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 331 001 12836000
PC 92 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 36-49mm	H 331 001 50801000
PC 92 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 50-59mm	H 331 001 50802000
PC 92 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 60-69mm	H 331 001 50803000
PC 92 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 70-79mm	H 331 001 50804000
PC 92 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 80-89mm	H 331 001 50805000
PC 92 SK0 8mm spindle DIN L/R with spring assist door leaf thickness 90-99mm	H 331 001 50806000
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 331 001 52831000
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 331 001 52832000
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 331 001 52833000
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 331 001 52834000
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 331 001 52835000
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 331 001 52836000

Further variants on the next page


Standard fittings for wide style doors

on long plate, with L-shaped handle and outside handle

Article / Feature	Order no.
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm with protective cover	H 3 3 1 0 0 2 1 2 8 3 1 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm with protective cover	H 3 3 1 0 0 2 1 2 8 3 2 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm with protective cover	H 3 3 1 0 0 2 1 2 8 3 3 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm with protective cover	H 3 3 1 0 0 2 1 2 8 3 4 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm with protective cover	H 3 3 1 0 0 2 1 2 8 3 5 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm with protective cover	H 3 3 1 0 0 2 1 2 8 3 6 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm with protective cover	H 3 3 1 0 0 2 5 2 8 3 1 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm with protective cover	H 3 3 1 0 0 2 5 2 8 3 2 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm with protective cover	H 3 3 1 0 0 2 5 2 8 3 3 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm with protective cover	H 3 3 1 0 0 2 5 2 8 3 4 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm with protective cover	H 3 3 1 0 0 2 5 2 8 3 5 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm with protective cover	H 3 3 1 0 0 2 5 2 8 3 6 0 0 0

Standard fittings for wide style doors

on long plate, with L-shaped handle and round knob

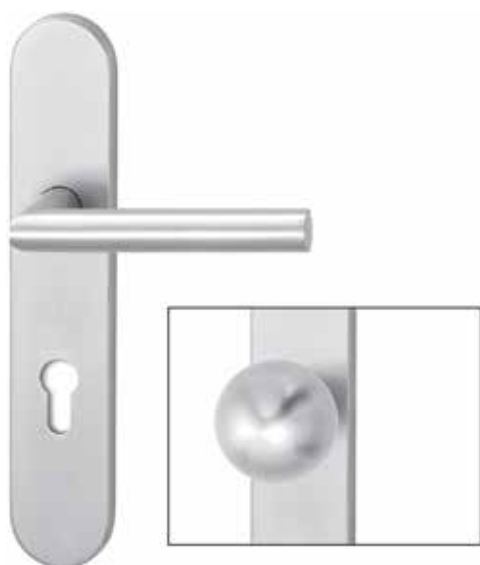

Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Prepared for your door thickness
- Elegant bevel handle

Notice

- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Round knob
Protection rating	0 / 2
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

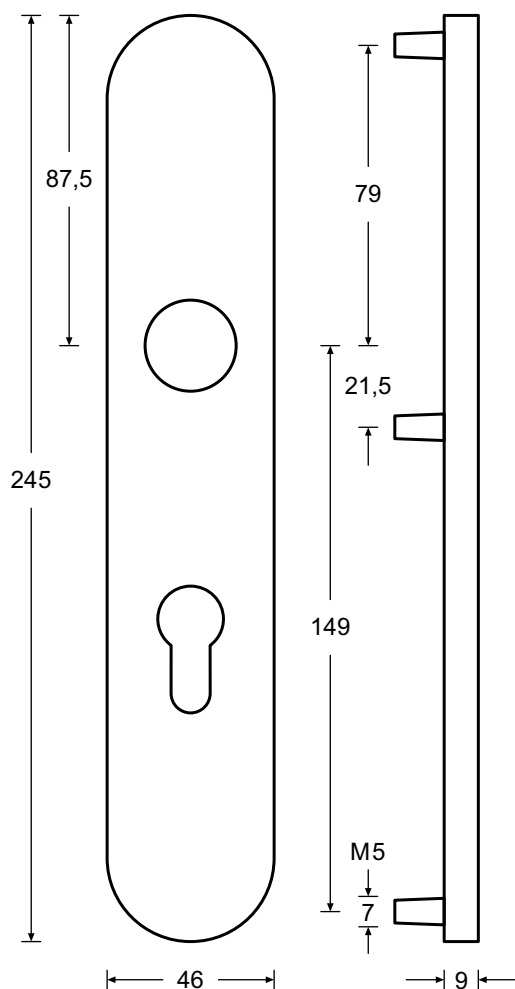

Article / Feature

Article / Feature	Order no.
PC 72 SK0 8mm spindle DIN L/R without spring assist door leaf thickness 36-49mm	H 3 3 1 0 1 1 1 0 8 3 1 0 0 0
PC 72 SK0 8mm spindle DIN L/R without spring assist door leaf thickness 50-59mm	H 3 3 1 0 1 1 1 0 8 3 2 0 0 0
PC 72 SK0 8mm spindle DIN L/R without spring assist door leaf thickness 60-69mm	H 3 3 1 0 1 1 1 0 8 3 3 0 0 0
PC 72 SK0 8mm spindle DIN L/R without spring assist door leaf thickness 70-79mm	H 3 3 1 0 1 1 1 0 8 3 4 0 0 0
PC 72 SK0 8mm spindle DIN L/R without spring assist door leaf thickness 80-89mm	H 3 3 1 0 1 1 1 0 8 3 5 0 0 0
PC 72 SK0 8mm spindle DIN L/R without spring assist door leaf thickness 90-99mm	H 3 3 1 0 1 1 1 0 8 3 6 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 3 3 1 0 1 1 1 2 8 3 1 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 3 3 1 0 1 1 1 2 8 3 2 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 3 3 1 0 1 1 1 2 8 3 3 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 3 3 1 0 1 1 1 2 8 3 4 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 3 3 1 0 1 1 1 2 8 3 5 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 3 3 1 0 1 1 1 2 8 3 6 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 3 3 1 0 1 1 5 2 8 3 1 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 3 3 1 0 1 1 5 2 8 3 2 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 3 3 1 0 1 1 5 2 8 3 3 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 3 3 1 0 1 1 5 2 8 3 4 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 3 3 1 0 1 1 5 2 8 3 5 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 3 3 1 0 1 1 5 2 8 3 6 0 0 0

Standard fittings for wide style doors

on long plate, with L-shaped handle and round knob



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Prepared for your door thickness
- Elegant bevel handle
- Protective cover for increased safety

Notice

- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Round knob
Protection rating	2
Version	With protective cover
Handle	L-shaped
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

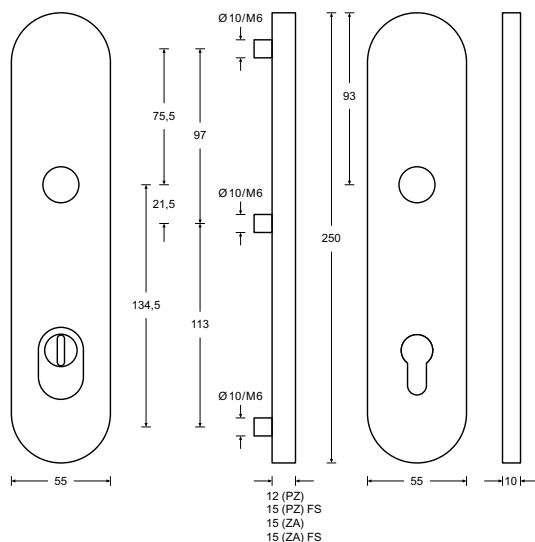

Article / Feature

Order no.

PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 3 3 1 0 1 2 1 2 8 3 1 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 3 3 1 0 1 2 1 2 8 3 2 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 3 3 1 0 1 2 1 2 8 3 3 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 3 3 1 0 1 2 1 2 8 3 4 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 3 3 1 0 1 2 1 2 8 3 5 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 3 3 1 0 1 2 1 2 8 3 6 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 3 3 1 0 1 2 5 2 8 3 1 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 3 3 1 0 1 2 5 2 8 3 2 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 3 3 1 0 1 2 5 2 8 3 3 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 3 3 1 0 1 2 5 2 8 3 4 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 3 3 1 0 1 2 5 2 8 3 5 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 3 3 1 0 1 2 5 2 8 3 6 0 0 0

Standard fittings for wide style doors

on long plate, with L-shaped handle and flat knob



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.


The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle

Notice

- Compatible with locks of series N1000

Technical attributes	
Exterior escutcheon	Flat knob
Protection rating	2
Handle	L-shaped
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

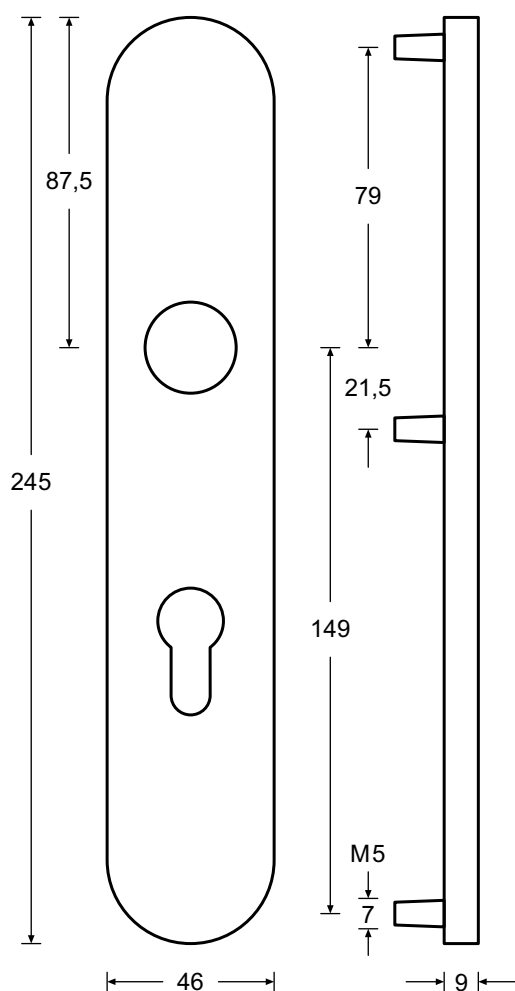

Article / Feature	Order no.
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 3 3 1 0 2 1 1 2 8 3 1 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 3 3 1 0 2 1 1 2 8 3 2 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 3 3 1 0 2 1 1 2 8 3 3 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 3 3 1 0 2 1 1 2 8 3 4 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 3 3 1 0 2 1 1 2 8 3 5 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 3 3 1 0 2 1 1 2 8 3 6 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm	H 3 3 1 0 2 1 5 2 8 3 1 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm	H 3 3 1 0 2 1 5 2 8 3 2 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm	H 3 3 1 0 2 1 5 2 8 3 3 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm	H 3 3 1 0 2 1 5 2 8 3 4 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm	H 3 3 1 0 2 1 5 2 8 3 5 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm	H 3 3 1 0 2 1 5 2 8 3 6 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm with protective cover	H 3 3 1 0 2 2 1 2 8 3 1 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm with protective cover	H 3 3 1 0 2 2 1 2 8 3 2 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm with protective cover	H 3 3 1 0 2 2 1 2 8 3 3 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm with protective cover	H 3 3 1 0 2 2 1 2 8 3 4 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm with protective cover	H 3 3 1 0 2 2 1 2 8 3 5 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm with protective cover	H 3 3 1 0 2 2 1 2 8 3 6 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 35-44mm with protective cover	H 3 3 1 0 2 2 5 2 8 3 1 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 45-54mm with protective cover	H 3 3 1 0 2 2 5 2 8 3 2 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 55-64mm with protective cover	H 3 3 1 0 2 2 5 2 8 3 3 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 65-74mm with protective cover	H 3 3 1 0 2 2 5 2 8 3 4 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 75-84mm with protective cover	H 3 3 1 0 2 2 5 2 8 3 5 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist door leaf thickness 85-94mm with protective cover	H 3 3 1 0 2 2 5 2 8 3 6 0 0 0

Standard fittings for wide style doors

on long plate, with J-shaped handle and outside handle



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle

Suitable mounting set

- Mounting set 2a and 3a (for SK 2) in the chapter „Accessories“

Notice


- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Handle
Protection rating	0 / 2
Handle	J-shaped
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 8mm spindle DIN L/R with spring assist	H 3 3 2 0 0 1 1 0 8 0 0 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist	H 3 3 2 0 0 1 1 2 8 3 0 0 0 0
PC 72 SK2 8 mm spindle DIN L/R without spring assist with protective cover	H 3 3 2 0 0 2 1 2 8 3 0 0 0 0
PC 92 SK0 8mm spindle DIN L/R with spring assist	H 3 3 2 0 0 1 5 0 8 0 0 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist	H 3 3 2 0 0 1 5 2 8 3 0 0 0 0
PC 92 SK2 8 mm spindle DIN L/R without spring assist with protective cover	H 3 3 2 0 0 2 5 2 8 3 0 0 0 0

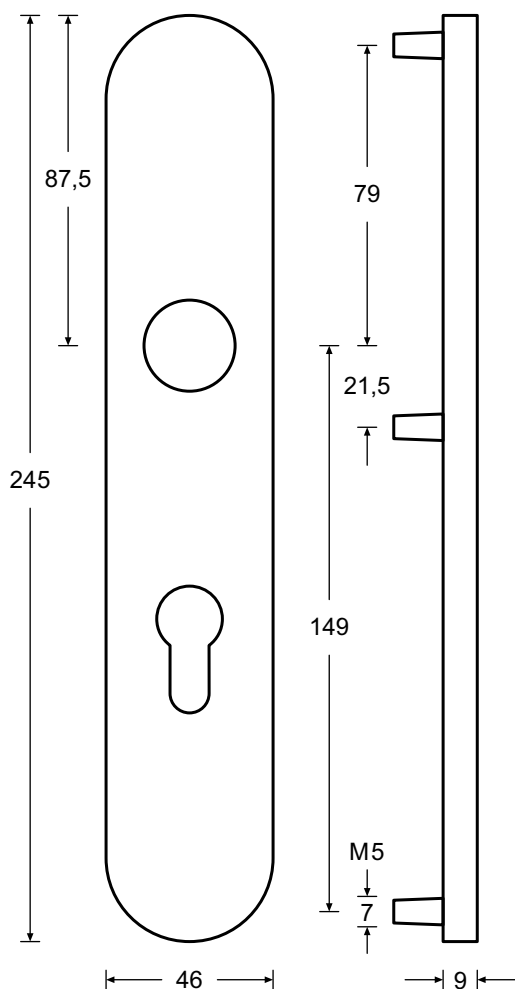

Standard fittings for wide style doors

on long plate, with J-shaped handle and round knob



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle

Suitable mounting set


- Mounting set 2c and 3c (for SK 2) in the chapter „Accessories“

Notice

- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Round knob
Protection rating	0 / 2
Handle	J-shaped
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

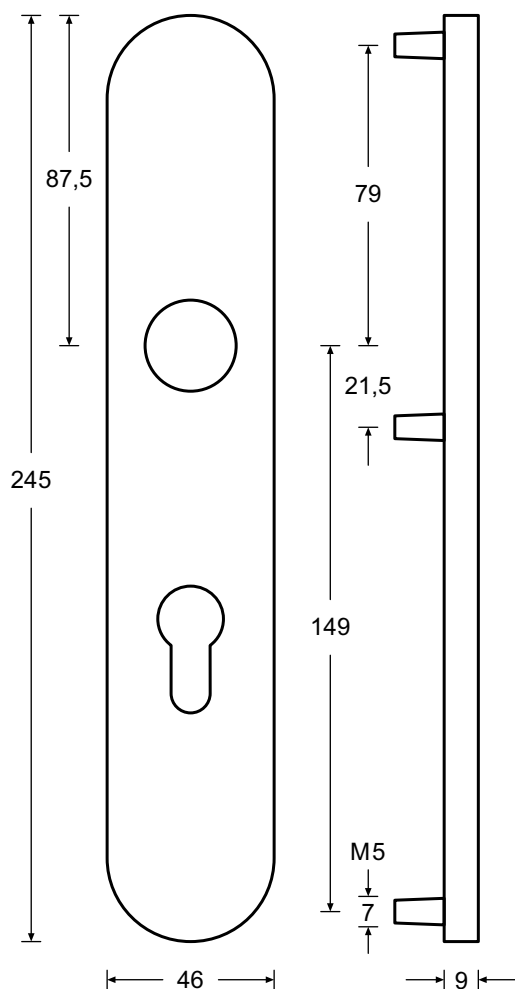

Article / Feature

Order no.

PC 72 SK0 8mm spindle DIN L	H 3 3 2 0 1 1 1 0 8 1 0 0 0 0
PC 72 SK0 8mm spindle DIN R	H 3 3 2 0 1 1 1 0 8 2 0 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist	H 3 3 2 0 1 1 1 2 8 3 0 0 0 0
PC 72 SK2 8 mm spindle DIN L/R without spring assist with protective cover	H 3 3 2 0 1 2 1 2 8 3 0 0 0 0
PC 92 SK0 8mm spindle DIN L	H 3 3 2 0 1 1 5 0 8 1 0 0 0 0
PC 92 SK0 8mm spindle DIN R	H 3 3 2 0 1 1 5 0 8 2 0 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist	H 3 3 2 0 1 1 5 2 8 3 0 0 0 0
PC 92 SK2 8 mm spindle DIN L/R without spring assist with protective cover	H 3 3 2 0 1 2 5 2 8 3 0 0 0 0

Standard fittings for wide style doors

on long plate, with J-shaped handle and flat knob



Standard fitting for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle

Suitable mounting set

- Mounting set 2c and 3c (for SK 2) in the chapter „Accessories“

Notice


- Compatible with locks of series N1000

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	0 / 2
Handle	J-shaped
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Long plate


Article / Feature

Article / Feature	Order no.
PC 72 SK0 8mm spindle DIN L	H 3 3 2 0 2 1 1 0 8 1 0 0 0 0
PC 72 SK0 8mm spindle DIN R	H 3 3 2 0 2 1 1 0 8 2 0 0 0 0
PC 72 SK2 8mm spindle DIN L/R without spring assist	H 3 3 2 0 2 1 1 2 8 3 0 0 0 0
PC 72 SK2 8 mm spindle DIN L/R without spring assist with protective cover	H 3 3 2 0 2 2 1 2 8 3 0 0 0 0
PC 92 SK0 8mm spindle DIN L	H 3 3 2 0 2 1 5 0 8 1 0 0 0 0
PC 92 SK0 8mm spindle DIN R	H 3 3 2 0 2 1 5 0 8 2 0 0 0 0
PC 92 SK2 8mm spindle DIN L/R without spring assist	H 3 3 2 0 2 1 5 2 8 3 0 0 0 0
PC 92 SK2 8 mm spindle DIN L/R without spring assist with protective cover	H 3 3 2 0 2 2 5 2 8 3 0 0 0 0

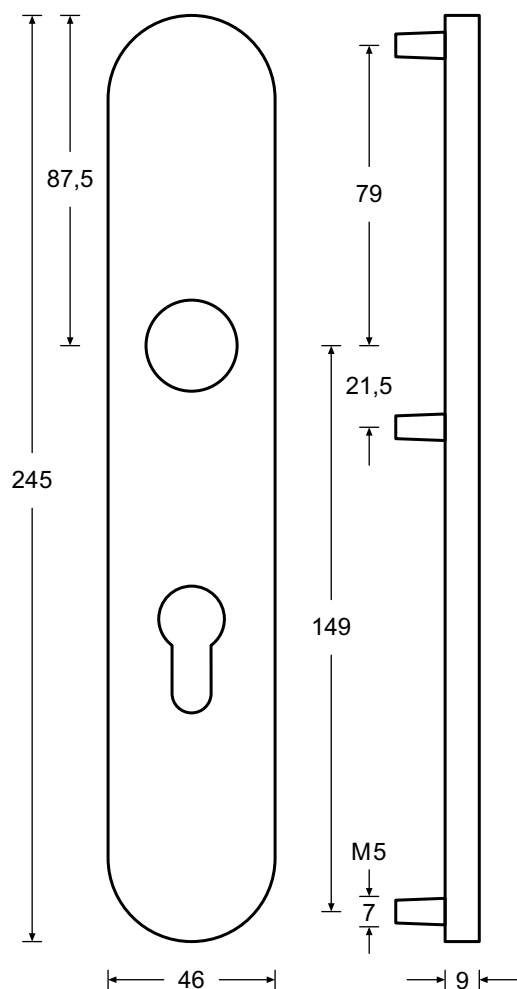

Panic fittings for wide style doors

on long plate, with C-shaped handle and outside handle

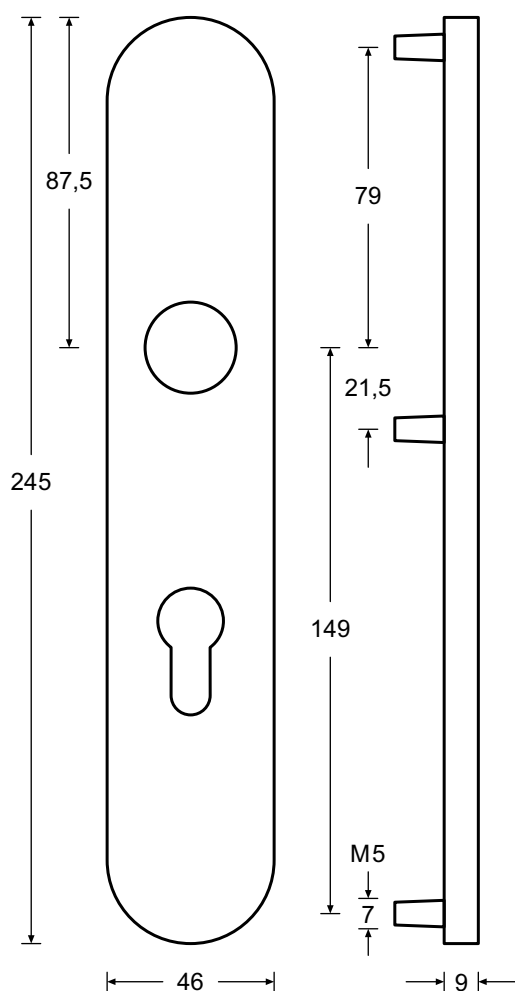

Panic fitting for wide style doors

The panic fitting for wide style doors is suitable for use on doors with escape door function in accordance with EN 179. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm, centrally split
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Order no.

PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 36-49mm	H 1 3 4 0 0 1 1 0 9 0 1 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 50-59mm	H 1 3 4 0 0 1 1 0 9 0 2 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 60-69mm	H 1 3 4 0 0 1 1 0 9 0 3 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 70-79mm	H 1 3 4 0 0 1 1 0 9 0 4 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 80-89mm	H 1 3 4 0 0 1 1 0 9 0 5 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 90-99mm	H 1 3 4 0 0 1 1 0 9 0 6 0 0 0

PC 92 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 36-49mm	H 1 3 4 0 0 1 5 0 9 0 1 0 0 0
PC 92 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 50-59mm	H 1 3 4 0 0 1 5 0 9 0 2 0 0 0
PC 92 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 60-69mm	H 1 3 4 0 0 1 5 0 9 0 3 0 0 0
PC 92 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 70-79mm	H 1 3 4 0 0 1 5 0 9 0 4 0 0 0
PC 92 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 80-89mm	H 1 3 4 0 0 1 5 0 9 0 5 0 0 0
PC 92 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 90-99mm	H 1 3 4 0 0 1 5 0 9 0 6 0 0 0

Panic fittings for wide style doors

on long plate, with C-shaped handle and round knob



Panic fitting for wide style doors

The panic fitting for wide style doors is suitable for use on doors with escape door function in accordance with EN 179. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.


The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**


Technical attributes	
Exterior escutcheon	Round knob
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

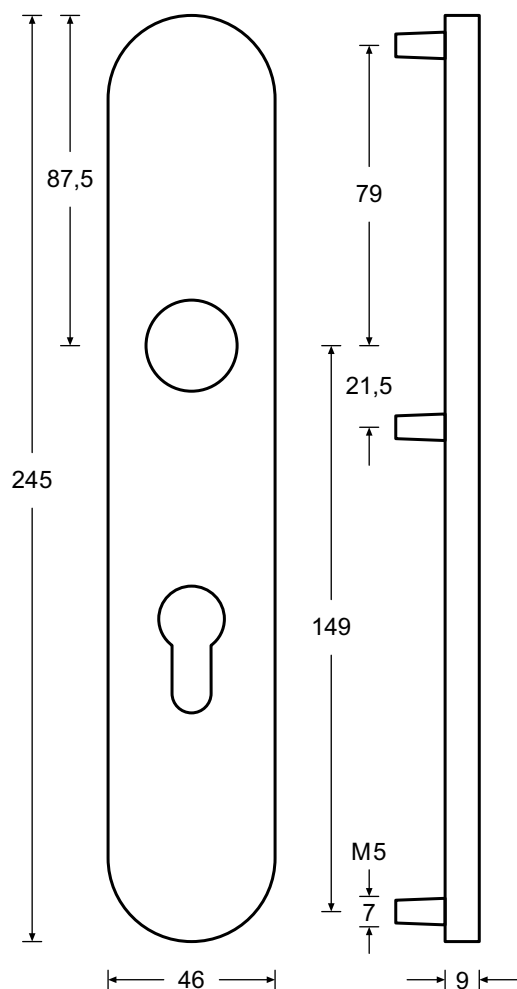

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L door leaf thickness 36-49mm	H 13 40 11 109 11 000
PC 72 SK0 9mm spindle DIN L door leaf thickness 50-59mm	H 13 40 11 109 12 000
PC 72 SK0 9mm spindle DIN L door leaf thickness 60-69mm	H 13 40 11 109 13 000
PC 72 SK0 9mm spindle DIN L door leaf thickness 70-79mm	H 13 40 11 109 14 000
PC 72 SK0 9mm spindle DIN L door leaf thickness 80-89mm	H 13 40 11 109 15 000
PC 72 SK0 9mm spindle DIN L door leaf thickness 90-99mm	H 13 40 11 109 16 000
PC 72 SK0 9mm spindle DIN R door leaf thickness 36-49mm	H 13 40 11 109 21 000
PC 72 SK0 9mm spindle DIN R door leaf thickness 50-59mm	H 13 40 11 109 22 000
PC 72 SK0 9mm spindle DIN R door leaf thickness 60-69mm	H 13 40 11 109 23 000
PC 72 SK0 9mm spindle DIN R door leaf thickness 70-79mm	H 13 40 11 109 24 000
PC 72 SK0 9mm spindle DIN R door leaf thickness 80-89mm	H 13 40 11 109 25 000
PC 72 SK0 9mm spindle DIN R door leaf thickness 90-99mm	H 13 40 11 109 26 000
PC 92 SK0 9mm spindle DIN L door leaf thickness 36-49mm	H 13 40 11 509 11 000
PC 92 SK0 9mm spindle DIN L door leaf thickness 50-59mm	H 13 40 11 509 12 000
PC 92 SK0 9mm spindle DIN L door leaf thickness 60-69mm	H 13 40 11 509 13 000
PC 92 SK0 9mm spindle DIN L door leaf thickness 70-79mm	H 13 40 11 509 14 000
PC 92 SK0 9mm spindle DIN L door leaf thickness 80-89mm	H 13 40 11 509 15 000
PC 92 SK0 9mm spindle DIN L door leaf thickness 90-99mm	H 13 40 11 509 16 000
PC 92 SK0 9mm spindle DIN R door leaf thickness 36-49mm	H 13 40 11 509 21 000
PC 92 SK0 9mm spindle DIN R door leaf thickness 50-59mm	H 13 40 11 509 22 000
PC 92 SK0 9mm spindle DIN R door leaf thickness 60-69mm	H 13 40 11 509 23 000
PC 92 SK0 9mm spindle DIN R door leaf thickness 70-79mm	H 13 40 11 509 24 000
PC 92 SK0 9mm spindle DIN R door leaf thickness 80-89mm	H 13 40 11 509 25 000
PC 92 SK0 9mm spindle DIN R door leaf thickness 90-99mm	H 13 40 11 509 26 000
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 36-49mm	H 13 40 11 509 31 000
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 50-59mm	H 13 40 11 509 32 000
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 60-69mm	H 13 40 11 509 33 000
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 70-79mm	H 13 40 11 509 34 000
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 80-89mm	H 13 40 11 509 35 000
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 90-99mm	H 13 40 11 509 36 000

Panic fittings for wide style doors

on long plate, with C-shaped handle and flat knob

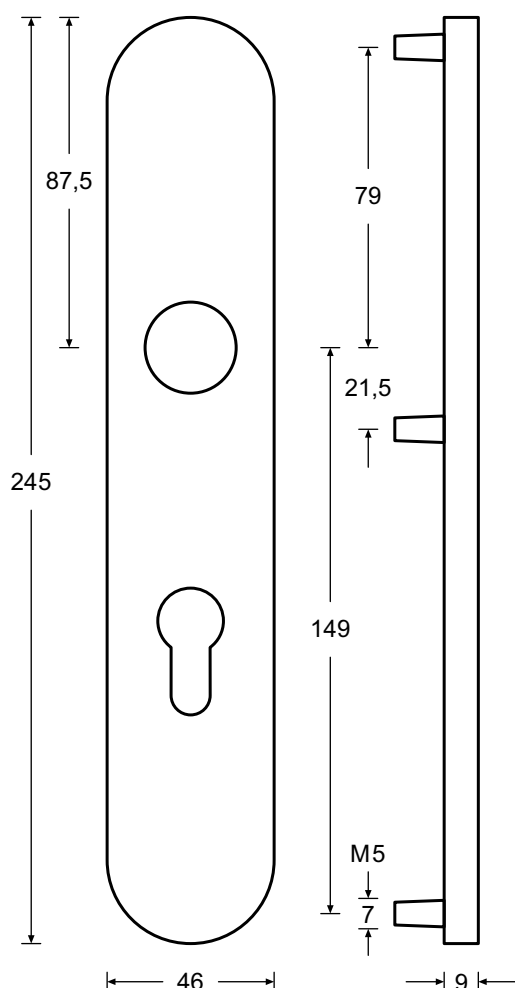

Panic fitting for wide style doors

The panic fitting for wide style doors is suitable for use on doors with escape door function in accordance with EN 179. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

Technical attributes


Exterior escutcheon	Flat knob
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 36-49mm	H 1 3 4 0 2 1 5 0 9 3 1 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 50-59mm	H 1 3 4 0 2 1 5 0 9 3 2 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 60-69mm	H 1 3 4 0 2 1 5 0 9 3 3 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 70-79mm	H 1 3 4 0 2 1 5 0 9 3 4 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 80-89mm	H 1 3 4 0 2 1 5 0 9 3 5 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist door leaf thickness 90-99mm	H 1 3 4 0 2 1 5 0 9 3 6 0 0 0

Panic fittings for wide style doors

on long plate, with U-shaped handle, with outside handle

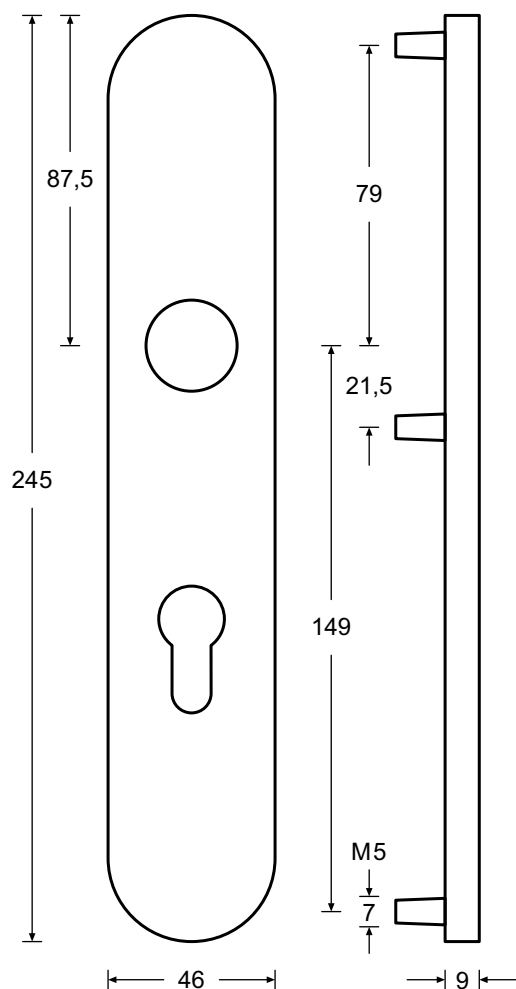

Panic fitting for wide style doors

The panic fitting for wide style doors is suitable for use on doors with escape door function in accordance with EN 179. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 6b in the chapter „Accessories“

Notice


- Compatible with locks of series N11**

Technical attributes	
Exterior escutcheon	Handle
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L/R with spring assist	H 1 3 3 0 0 1 1 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle DIN L/R with spring assist	H 1 3 3 0 0 1 5 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist	H 1 3 3 0 0 1 5 0 9 3 0 0 0 0

Panic fittings for wide style doors

on long plate, with U-shaped handle, with round knob

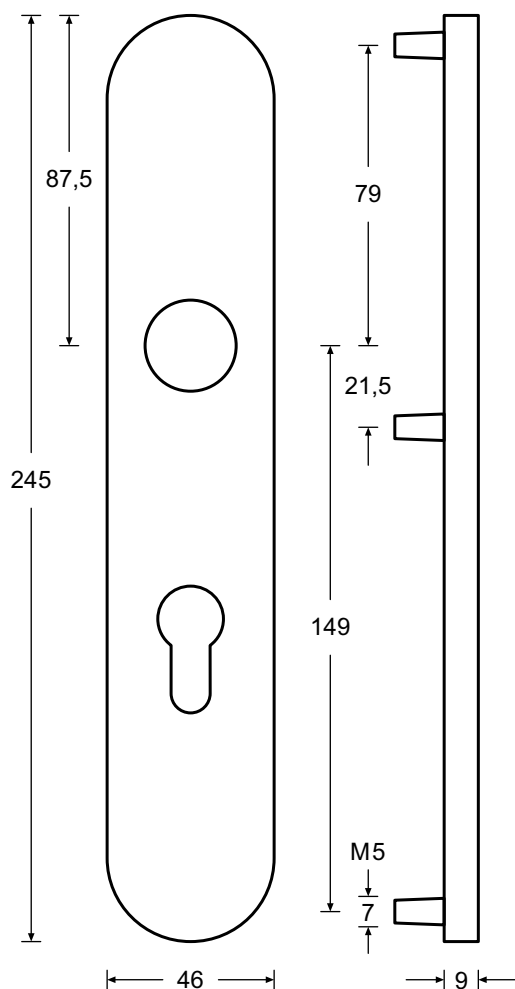

Panic fitting for wide style doors

The panic fitting for wide style doors is suitable for use on doors with escape door function in accordance with EN 179. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 6c in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

Technical attributes


Exterior escutcheon	Round knob
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L	H 13 3 0 1 1 1 0 9 1 0 0 0 0
PC 72 SK0 9mm spindle DIN R	H 13 3 0 1 1 1 0 9 2 0 0 0 0
PC 92 SK0 9mm spindle DIN L	H 13 3 0 1 1 5 0 9 1 0 0 0 0
PC 92 SK0 9mm spindle DIN R	H 13 3 0 1 1 5 0 9 2 0 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist	H 13 3 0 1 1 5 0 9 3 0 0 0 0

Panic fittings for wide style doors

on long plate, with U-shaped handle, with flat knob

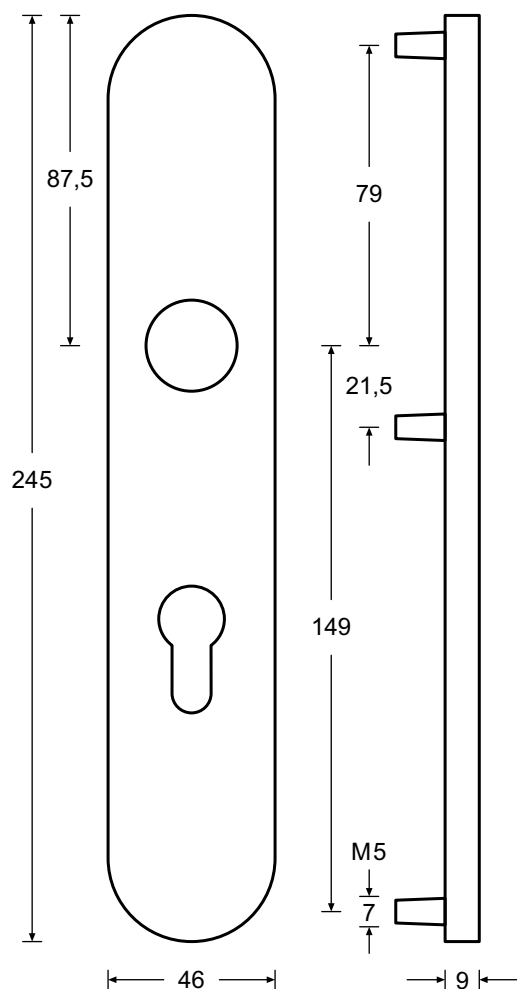

Panic fitting for wide style doors

The panic fitting for wide style doors is suitable for use on doors with escape door function in accordance with EN 179. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 6c in the chapter „Accessories“



Notice

- Compatible with locks of series N11**

Technical attributes	
Exterior escutcheon	Flat knob
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L	H 1 3 3 0 2 1 1 0 9 1 0 0 0 0
PC 72 SK0 9mm spindle DIN R	H 1 3 3 0 2 1 1 0 9 2 0 0 0 0
PC 92 SK0 9mm spindle DIN L	H 1 3 3 0 2 1 5 0 9 1 0 0 0 0
PC 92 SK0 9mm spindle DIN R	H 1 3 3 0 2 1 5 0 9 2 0 0 0 0
PC 92 SK0 9mm spindle DIN L/R without spring assist	H 1 3 3 0 2 1 5 0 9 3 0 0 0 0

Fire protection fittings for wide style doors on rose, with L-shaped handle and outside handle



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273




Notice

- Compatible with locks of series N1050

Technical attributes	
Exterior escutcheon	Handle
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 37-50mm	H 501001X0901000
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 51-60mm	H 501001X0902000
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 61-70mm	H 501001X0903000
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 71-80mm	H 501001X0904000
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 81-90mm	H 501001X0905000
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 91-100mm	H 501001X0906000

Fire protection fittings for wide style doors on rose, with L-shaped handle and round knob



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Notice

- Compatible with locks of series N1050




Technical attributes

Exterior escutcheon	Round knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 5 0 1 0 1 1 X 0 9 1 1 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 5 0 1 0 1 1 X 0 9 1 2 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 5 0 1 0 1 1 X 0 9 1 3 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 5 0 1 0 1 1 X 0 9 1 4 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 5 0 1 0 1 1 X 0 9 1 5 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 5 0 1 0 1 1 X 0 9 1 6 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 5 0 1 0 1 1 X 0 9 2 1 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 5 0 1 0 1 1 X 0 9 2 2 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 5 0 1 0 1 1 X 0 9 2 3 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 5 0 1 0 1 1 X 0 9 2 4 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 5 0 1 0 1 1 X 0 9 2 5 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 5 0 1 0 1 1 X 0 9 2 6 0 0 0

Fire protection fittings for wide style doors on rose, with L-shaped handle and flat knob



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Notice

- Compatible with locks of series N1050

Technical attributes



Exterior escutcheon	Flat knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Order no.

PC rose SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 5 0 1 0 2 1 X 0 9 1 1 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 5 0 1 0 2 1 X 0 9 1 2 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 5 0 1 0 2 1 X 0 9 1 3 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 5 0 1 0 2 1 X 0 9 1 4 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 5 0 1 0 2 1 X 0 9 1 5 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 5 0 1 0 2 1 X 0 9 1 6 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 5 0 1 0 2 1 X 0 9 2 1 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 5 0 1 0 2 1 X 0 9 2 2 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 5 0 1 0 2 1 X 0 9 2 3 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 5 0 1 0 2 1 X 0 9 2 4 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 5 0 1 0 2 1 X 0 9 2 5 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 5 0 1 0 2 1 X 0 9 2 6 0 0 0

Fire protection fittings for wide style doors on rose, with J-shaped handle and outside handle



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 4a in the chapter „Accessories“

Notice

- Compatible with locks of series N1050

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose





Article / Feature

PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 5 0 2 0 0 1 X 0 9 0 0 0 0 0

Fire protection fittings for wide style doors on rose, with J-shaped handle and round knob



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 4c in the chapter „Accessories“

Notice

- Compatible with locks of series N1050





Technical attributes

Exterior escutcheon	Round knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L	H 5 0 2 0 1 1 X 0 9 1 0 0 0 0
PC rose SK0 9mm spindle DIN R	H 5 0 2 0 1 1 X 0 9 2 0 0 0 0

Fire protection fittings for wide style doors on rose, with J-shaped handle and flat knob



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 4c in the chapter „Accessories“

Notice

- Compatible with locks of series N1050


Technical attributes

Exterior escutcheon	Flat knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L	H 5 0 2 0 2 1 X 0 9 1 0 0 0 0
PC rose SK0 9mm spindle DIN R	H 5 0 2 0 2 1 X 0 9 2 0 0 0 0

Fire protection fittings for wide style doors on short plate, with L-shaped handle and outside handle

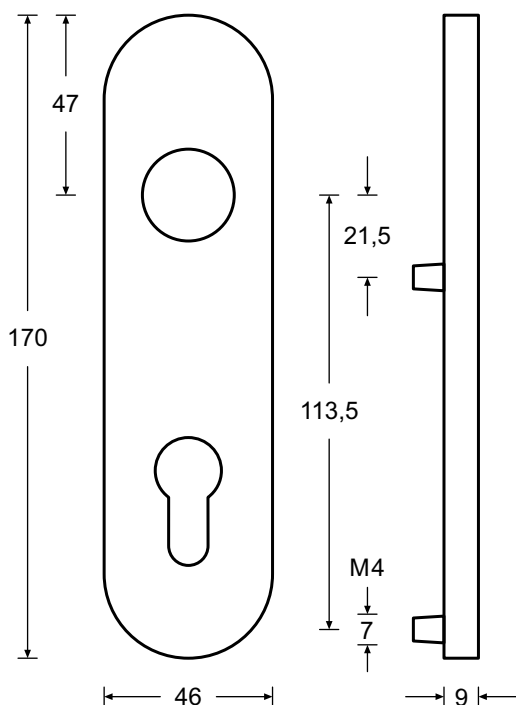

Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Notice

- Compatible with locks of series N1050


Technical attributes

Distance	72 mm
Exterior escutcheon	Handle
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 37-50mm	H 5 1 1 0 0 1 1 0 9 0 1 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 51-60mm	H 5 1 1 0 0 1 1 0 9 0 2 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 61-70mm	H 5 1 1 0 0 1 1 0 9 0 3 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 71-80mm	H 5 1 1 0 0 1 1 0 9 0 4 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 81-90mm	H 5 1 1 0 0 1 1 0 9 0 5 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 91-100mm	H 5 1 1 0 0 1 1 0 9 0 6 0 0 0

Fire protection fittings for wide style doors on short plate, with L-shaped handle and round knob

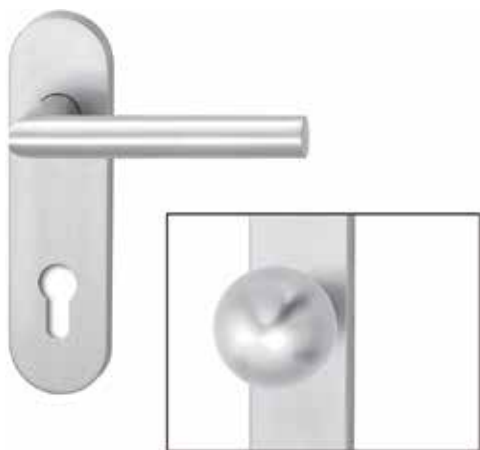

Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Notice

- Compatible with locks of series N1050

Technical attributes



Distance	72 mm
Exterior escutcheon	Round knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

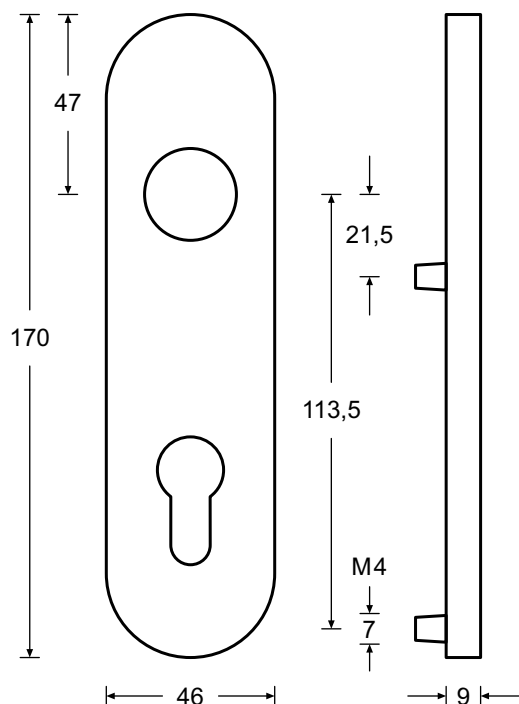

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 5 1 1 0 1 1 1 0 9 1 1 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 5 1 1 0 1 1 1 0 9 1 2 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 5 1 1 0 1 1 1 0 9 1 3 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 5 1 1 0 1 1 1 0 9 1 4 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 5 1 1 0 1 1 1 0 9 1 5 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 5 1 1 0 1 1 1 0 9 1 6 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 5 1 1 0 1 1 1 0 9 2 1 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 5 1 1 0 1 1 1 0 9 2 2 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 5 1 1 0 1 1 1 0 9 2 3 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 5 1 1 0 1 1 1 0 9 2 4 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 5 1 1 0 1 1 1 0 9 2 5 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 5 1 1 0 1 1 1 0 9 2 6 0 0 0

Fire protection fittings for wide style doors on short plate, with L-shaped handle and flat knob

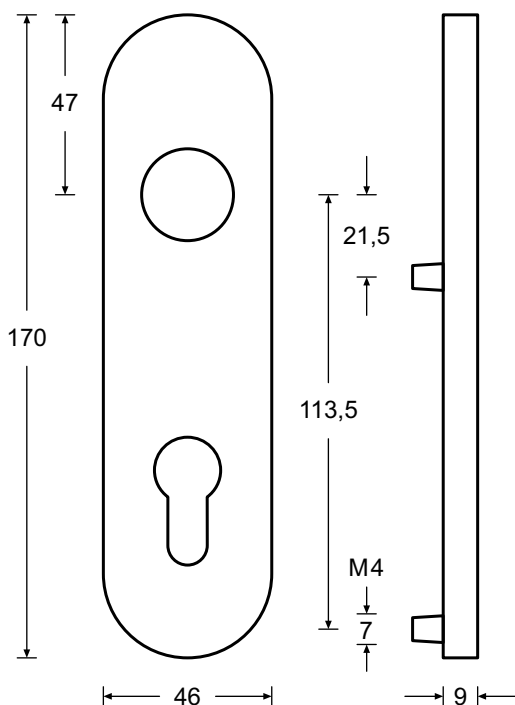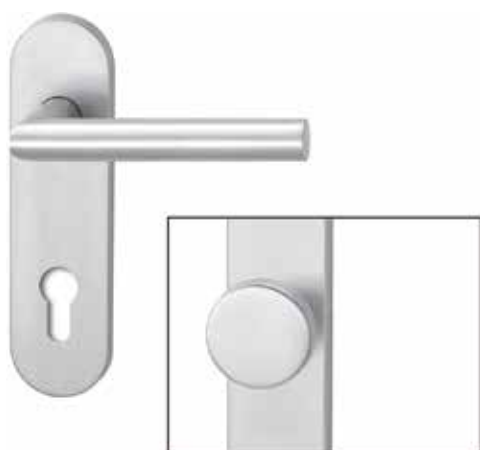

Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Notice

- Compatible with locks of series N1050

Technical attributes

Distance	72 mm
Exterior escutcheon	Flat knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 5 1 1 0 2 1 1 0 9 1 1 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 5 1 1 0 2 1 1 0 9 1 2 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 5 1 1 0 2 1 1 0 9 1 3 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 5 1 1 0 2 1 1 0 9 1 4 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 5 1 1 0 2 1 1 0 9 1 5 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 5 1 1 0 2 1 1 0 9 1 6 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 5 1 1 0 2 1 1 0 9 2 1 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 5 1 1 0 2 1 1 0 9 2 2 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 5 1 1 0 2 1 1 0 9 2 3 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 5 1 1 0 2 1 1 0 9 2 4 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 5 1 1 0 2 1 1 0 9 2 5 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 5 1 1 0 2 1 1 0 9 2 6 0 0 0

Fire protection fittings for wide style doors on short plate, with J-shaped handle and outside handle



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 5a in the chapter „Accessories“

Notice

- Compatible with locks of series N1050

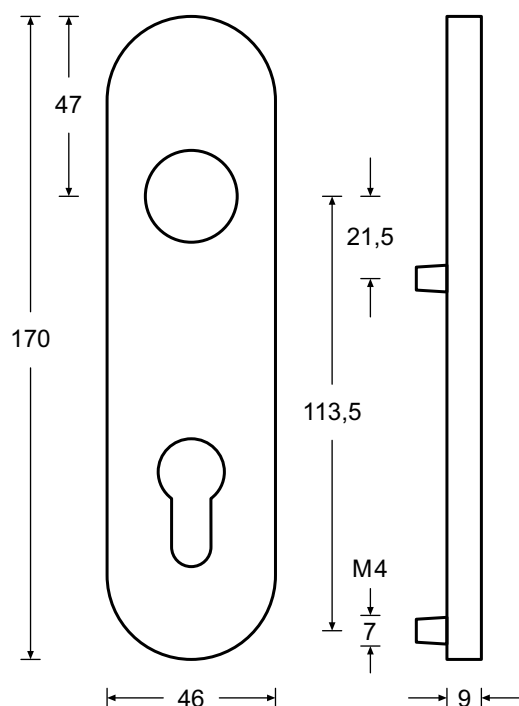

Technical attributes

Distance	72 mm
Exterior escutcheon	Handle
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature

PC 72 SK0 9mm spindle DIN L/R with spring assist

Order no.

H 5 1 2 0 0 1 1 0 9 0 0 0 0 0

Fire protection fittings for wide style doors on short plate, with J-shaped handle and round knob



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 5c in the chapter „Accessories“

Notice

- Compatible with locks of series N1050

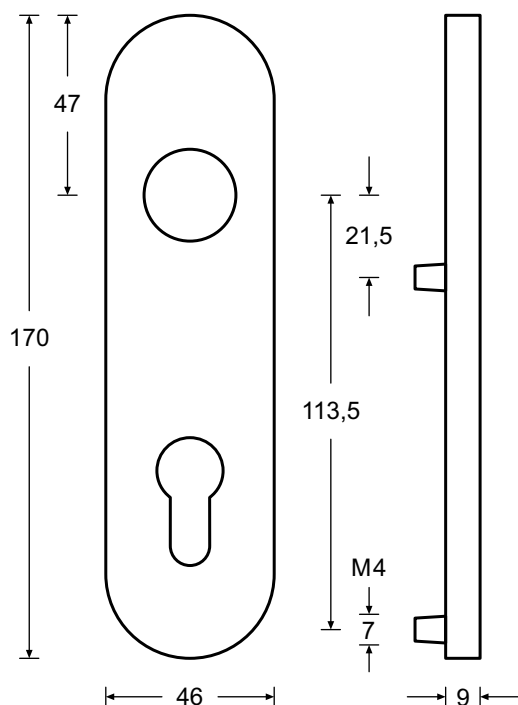

Technical attributes

Distance	72 mm
Exterior escutcheon	Round knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L	H 5 1 2 0 1 1 1 0 9 1 0 0 0 0
PC 72 SK0 9mm spindle DIN R	H 5 1 2 0 1 1 1 0 9 2 0 0 0 0

Fire protection fittings for wide style doors on short plate, with J-shaped handle and flat knob



Fire protection fitting for wide style doors

The fire protection fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 5c in the chapter „Accessories“

Notice


- Compatible with locks of series N1050

Technical attributes

Distance	72 mm
Exterior escutcheon	Flat knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate



Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L	H 5 1 2 0 2 1 1 0 9 1 0 0 0 0
PC 72 SK0 9mm spindle DIN R	H 5 1 2 0 2 1 1 0 9 2 0 0 0 0

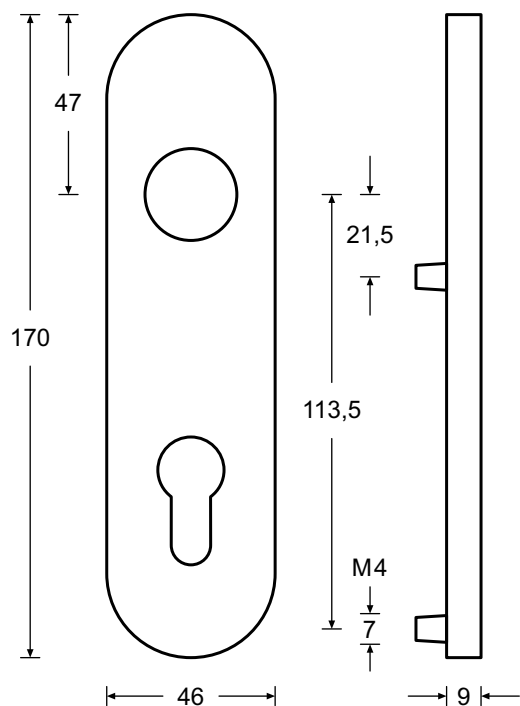

Fire protection fittings with panic handle for wide style doors

on rose, with C-shaped handle and outside handle



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality C-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

Technical attributes




Exterior escutcheon	Handle
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm, centrally split
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 37-50mm	H 7 0 4 0 0 1 X 0 9 0 1 0 0 0
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 51-60mm	H 7 0 4 0 0 1 X 0 9 0 2 0 0 0
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 61-70mm	H 7 0 4 0 0 1 X 0 9 0 3 0 0 0
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 71-80mm	H 7 0 4 0 0 1 X 0 9 0 4 0 0 0
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 81-90mm	H 7 0 4 0 0 1 X 0 9 0 5 0 0 0
PC rose SK0 9mm spindle DIN L/R with spring assist door leaf thickness 91-100mm	H 7 0 4 0 0 1 X 0 9 0 6 0 0 0

Fire protection fittings with panic handle for wide style doors

on rose, with C-shaped handle and round knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 180. The high-quality C-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Notice



- Compatible with locks of series N11**

Technical attributes	
Exterior escutcheon	Round knob
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 7 0 4 0 1 1 X 0 9 1 1 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 7 0 4 0 1 1 X 0 9 1 2 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 7 0 4 0 1 1 X 0 9 1 3 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 7 0 4 0 1 1 X 0 9 1 4 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 7 0 4 0 1 1 X 0 9 1 5 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 7 0 4 0 1 1 X 0 9 1 6 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 7 0 4 0 1 1 X 0 9 2 1 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 7 0 4 0 1 1 X 0 9 2 2 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 7 0 4 0 1 1 X 0 9 2 3 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 7 0 4 0 1 1 X 0 9 2 4 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 7 0 4 0 1 1 X 0 9 2 5 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 7 0 4 0 1 1 X 0 9 2 6 0 0 0

Fire protection fittings with panic handle for wide style doors

on rose, with C-shaped handle and flat knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 181. The high-quality C-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

Technical attributes




Exterior escutcheon	Flat knob
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 7 0 4 0 2 1 X 0 9 1 1 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 7 0 4 0 2 1 X 0 9 1 2 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 7 0 4 0 2 1 X 0 9 1 3 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 7 0 4 0 2 1 X 0 9 1 4 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 7 0 4 0 2 1 X 0 9 1 5 0 0 0
PC rose SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 7 0 4 0 2 1 X 0 9 1 6 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 7 0 4 0 2 1 X 0 9 2 1 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 7 0 4 0 2 1 X 0 9 2 2 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 7 0 4 0 2 1 X 0 9 2 3 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 7 0 4 0 2 1 X 0 9 2 4 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 7 0 4 0 2 1 X 0 9 2 5 0 0 0
PC rose SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 7 0 4 0 2 1 X 0 9 2 6 0 0 0

Fire protection fittings with panic handle for wide style doors

on rose, with U-shaped handle



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 182. The high-quality U-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 4b in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature




PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 7 0 3 0 0 1 X 0 9 0 0 0 0 0

Fire protection fittings with panic handle for wide style doors

on rose, with U-shaped handle, with round knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 183. The high-quality U-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 4c in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

Technical attributes




Exterior escutcheon	Round knob
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L	H 7 0 3 0 1 1 X 0 9 1 0 0 0 0
PC rose SK0 9mm spindle DIN R	H 7 0 3 0 1 1 X 0 9 2 0 0 0 0

Fire protection fittings with panic handle for wide style doors

on rose, with U-shaped handle, with flat knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 184. The high-quality U-shaped handle on rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 4c in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Rose

Article / Feature

Article / Feature	Order no.
PC rose SK0 9mm spindle DIN L	H 7 0 3 0 2 1 X 0 9 1 0 0 0 0
PC rose SK0 9mm spindle DIN R	H 7 0 3 0 2 1 X 0 9 2 0 0 0 0

Fire protection fittings with panic handle for wide style doors on short plate with C-shaped handle



Fire protection fitting with panic handle for wide style doors


The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 185. The high-quality C-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

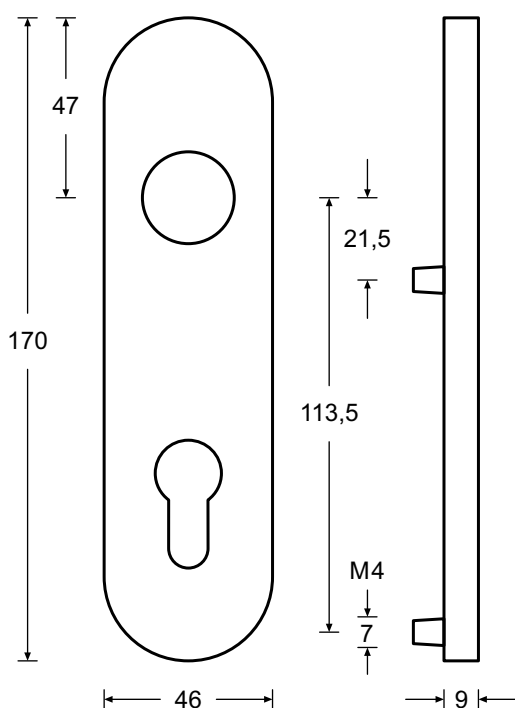

Technical attributes	
Distance	72 mm
Exterior escutcheon	Handle
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm, centrally split
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 37-50mm	H 7 1 4 0 0 1 1 0 9 0 1 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 51-60mm	H 7 1 4 0 0 1 1 0 9 0 2 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 61-70mm	H 7 1 4 0 0 1 1 0 9 0 3 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 71-80mm	H 7 1 4 0 0 1 1 0 9 0 4 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 81-90mm	H 7 1 4 0 0 1 1 0 9 0 5 0 0 0
PC 72 SK0 9mm spindle DIN L/R with spring assist door leaf thickness 91-100mm	H 7 1 4 0 0 1 1 0 9 0 6 0 0 0

Fire protection fittings with panic handle for wide style doors

on short plate, with C-shaped handle and round knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 186. The high-quality C-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

Technical attributes

Distance	72 mm
Exterior escutcheon	Round knob
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

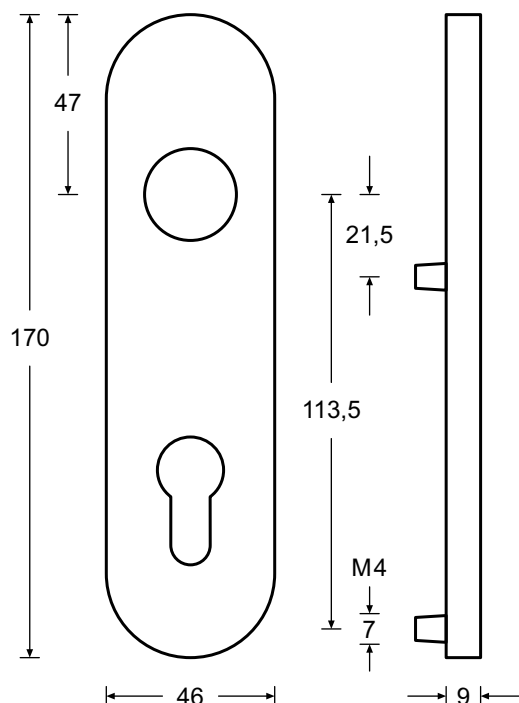


Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 7 1 4 0 1 1 1 0 9 1 1 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 7 1 4 0 1 1 1 0 9 1 2 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 7 1 4 0 1 1 1 0 9 1 3 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 7 1 4 0 1 1 1 0 9 1 4 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 7 1 4 0 1 1 1 0 9 1 5 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 7 1 4 0 1 1 1 0 9 1 6 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 7 1 4 0 1 1 1 0 9 2 1 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 7 1 4 0 1 1 1 0 9 2 2 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 7 1 4 0 1 1 1 0 9 2 3 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 7 1 4 0 1 1 1 0 9 2 4 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 7 1 4 0 1 1 1 0 9 2 5 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 7 1 4 0 1 1 1 0 9 2 6 0 0 0

Fire protection fittings with panic handle for wide style doors

on short plate, with C-shaped handle and flat knob

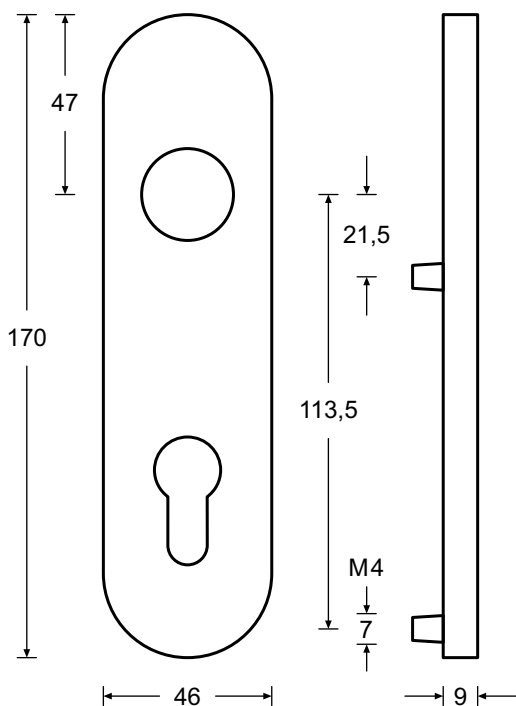

Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 187. The high-quality C-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Notice

- Compatible with locks of series N11**

Technical attributes

Distance	72 mm
Exterior escutcheon	Flat knob
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L door leaf thickness 37-50mm	H 7 1 4 0 2 1 1 0 9 1 1 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 51-60mm	H 7 1 4 0 2 1 1 0 9 1 2 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 61-70mm	H 7 1 4 0 2 1 1 0 9 1 3 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 71-80mm	H 7 1 4 0 2 1 1 0 9 1 4 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 81-90mm	H 7 1 4 0 2 1 1 0 9 1 5 0 0 0
PC 72 SK0 9mm spindle DIN L door leaf thickness 91-100mm	H 7 1 4 0 2 1 1 0 9 1 6 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 37-50mm	H 7 1 4 0 2 1 1 0 9 2 1 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 51-60mm	H 7 1 4 0 2 1 1 0 9 2 2 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 61-70mm	H 7 1 4 0 2 1 1 0 9 2 3 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 71-80mm	H 7 1 4 0 2 1 1 0 9 2 4 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 81-90mm	H 7 1 4 0 2 1 1 0 9 2 5 0 0 0
PC 72 SK0 9mm spindle DIN R door leaf thickness 91-100mm	H 7 1 4 0 2 1 1 0 9 2 6 0 0 0

Fire protection fittings with panic handle for wide style doors

on short plate, with U-shaped handle, with outside handle



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 188. The high-quality U-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 5b in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

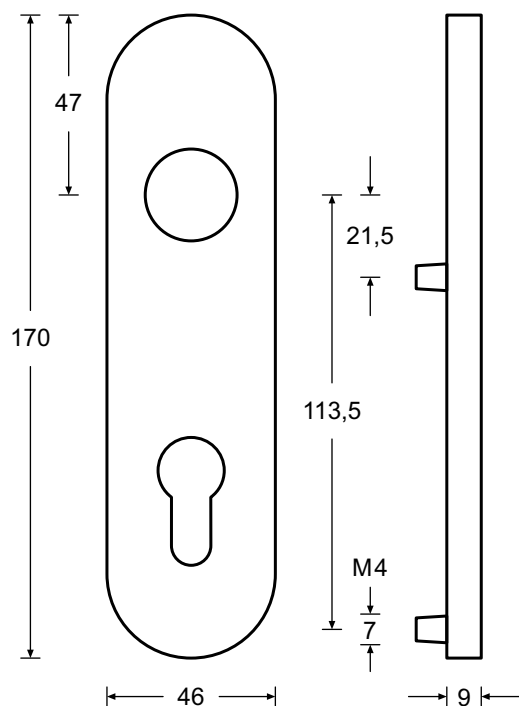

Technical attributes	
Distance	72 mm
Exterior escutcheon	Handle
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L/R with spring assist	H 7 1 3 0 0 1 1 0 9 0 0 0 0 0

Fire protection fittings with panic handle for wide style doors

on short plate, with U-shaped handle, with round knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 189. The high-quality U-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 5c in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

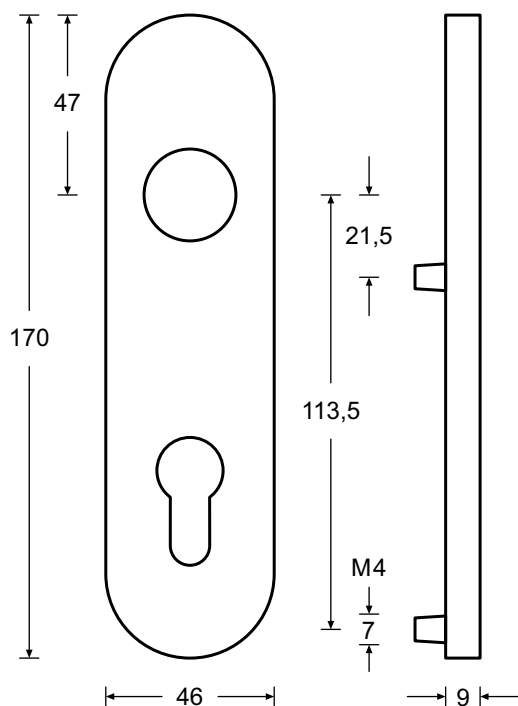

Technical attributes

Distance	72 mm
Exterior escutcheon	Round knob
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L	H 7 1 3 0 1 1 1 0 9 1 0 0 0 0
PC 72 SK0 9mm spindle DIN R	H 7 1 3 0 1 1 1 0 9 2 0 0 0 0

Fire protection fittings with panic handle for wide style doors

on short plate, with U-shaped handle, with flat knob



Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 190. The high-quality U-shaped handle on short plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 5c in the chapter „Accessories“

Notice

- Compatible with locks of series N11**

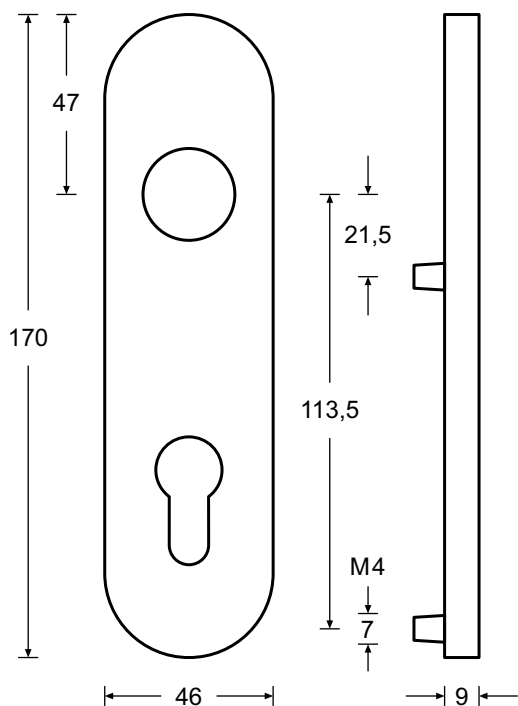

Technical attributes	
Distance	72 mm
Exterior escutcheon	Flat knob
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Short plate

Article / Feature	Order no.
PC 72 SK0 9mm spindle DIN L	H 7 1 3 0 2 1 1 0 9 1 0 0 0 0
PC 72 SK0 9mm spindle DIN R	H 7 1 3 0 2 1 1 0 9 2 0 0 0 0

Security fittings for wide style doors

on long plate, with C-shaped handle and outside handle



Security fitting for wide style doors and standard profile cylinder perforation


The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 809N and 819N with 92 mm distance

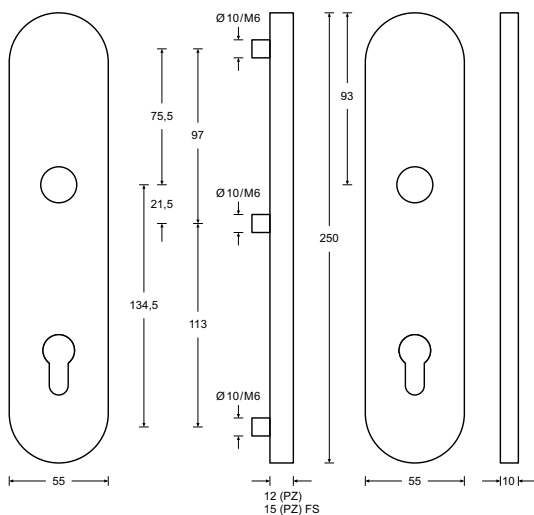

Technical attributes

Exterior escutcheon	Handle
Protection rating	3
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm, centrally split
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H93400113931000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H93400113932000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H93400113933000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H93400113934000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H93400113935000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H93400113936000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H93400153931000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H93400153932000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H93400153933000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H93400153934000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H93400153935000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H93400153936000

Security fittings for wide style doors

on long plate, with C-shaped handle and outside handle



Security fitting for wide style doors


The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 809N and 819N with 92 mm distance

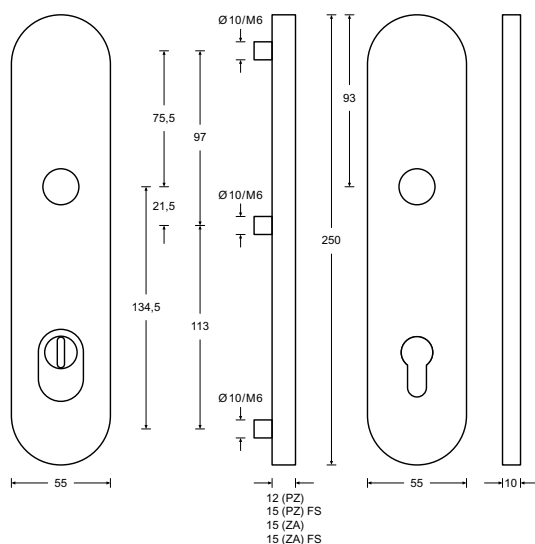

Drawing shows SK 3

Technical attributes

Exterior escutcheon	Handle
Protection rating	3 / 4
Version	With protective cover
Handle	C-shaped
Handle spindle	9 mm, centrally split
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H93400213931000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H93400213932000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H93400213933000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H93400213934000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H93400213935000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H93400213936000

PC 72 SK4 9mm spindle DIN L door leaf thickness 36-40mm	H93400214911000
PC 72 SK4 9mm spindle DIN L door leaf thickness 41-45mm	H93400214912000
PC 72 SK4 9mm spindle DIN L door leaf thickness 46-50mm	H93400214913000
PC 72 SK4 9mm spindle DIN L door leaf thickness 51-55mm	H93400214914000
PC 72 SK4 9mm spindle DIN L door leaf thickness 56-60mm	H93400214915000
PC 72 SK4 9mm spindle DIN L door leaf thickness 61-65mm	H93400214916000

PC 72 SK4 9mm spindle DIN R door leaf thickness 36-40mm	H93400214921000
PC 72 SK4 9mm spindle DIN R door leaf thickness 41-45mm	H93400214922000
PC 72 SK4 9mm spindle DIN R door leaf thickness 46-50mm	H93400214923000
PC 72 SK4 9mm spindle DIN R door leaf thickness 51-55mm	H93400214924000
PC 72 SK4 9mm spindle DIN R door leaf thickness 56-60mm	H93400214925000
PC 72 SK4 9mm spindle DIN R door leaf thickness 61-65mm	H93400214926000

Further variants on the next page

Security fittings for wide style doors on long plate, with C-shaped handle and outside handle

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H 93 400 253 931 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H 93 400 253 932 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H 93 400 253 933 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H 93 400 253 934 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H 93 400 253 935 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H 93 400 253 936 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 36-40mm	H 93 400 254 911 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 41-45mm	H 93 400 254 912 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 46-50mm	H 93 400 254 913 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 51-55mm	H 93 400 254 914 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 56-60mm	H 93 400 254 915 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 61-65mm	H 93 400 254 916 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 36-40mm	H 93 400 254 921 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 41-45mm	H 93 400 254 922 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 46-50mm	H 93 400 254 923 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 51-55mm	H 93 400 254 924 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 56-60mm	H 93 400 254 925 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 61-65mm	H 93 400 254 926 000

Security fittings for wide style doors

on long plate, with U-shaped handle, with outside handle



Security fitting for wide style doors

The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906

Suitable mounting set

- Mounting set 7b and 8b (for SK 4) in the chapter „Accessories“

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 809N and 819N with 92 mm distance

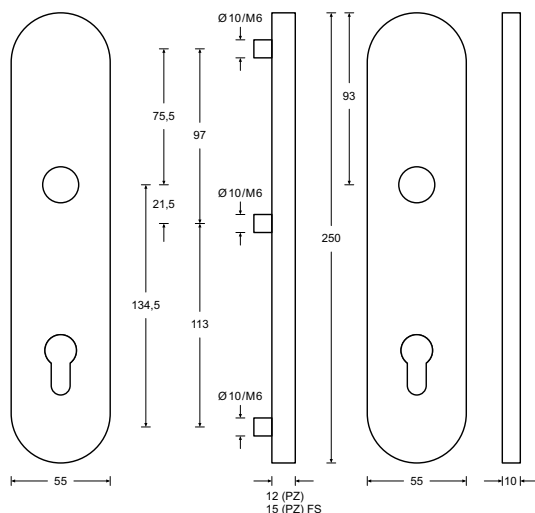

Drawing shows SK 3

Technical attributes

Exterior escutcheon	Handle
Protection rating	3 / 4
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist	H 9 3 3 0 0 1 1 3 9 3 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist with protective cover	H 9 3 3 0 0 2 5 3 9 3 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist	H 9 3 3 0 0 1 5 3 9 3 0 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist with protective cover	H 9 3 3 0 0 2 1 3 9 3 0 0 0 0
PC 72 SK4 9mm spindle DIN L	H 9 3 3 0 0 2 1 4 9 1 0 0 0 0
PC 72 SK4 9mm spindle DIN R	H 9 3 3 0 0 2 1 4 9 2 0 0 0 0
PC 92 SK4 9mm spindle DIN L	H 9 3 3 0 0 2 5 4 9 1 0 0 0 0
PC 92 SK4 9mm spindle DIN R	H 9 3 3 0 0 2 5 4 9 2 0 0 0 0

Security fittings for wide style doors

on long plate, with U-shaped handle, with round knob



Security fitting for wide style doors

The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906

Suitable mounting set

- Mounting set 7c and 8c (for SK 4) in the chapter „Accessories“

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 319N and 519N with 92 mm distance

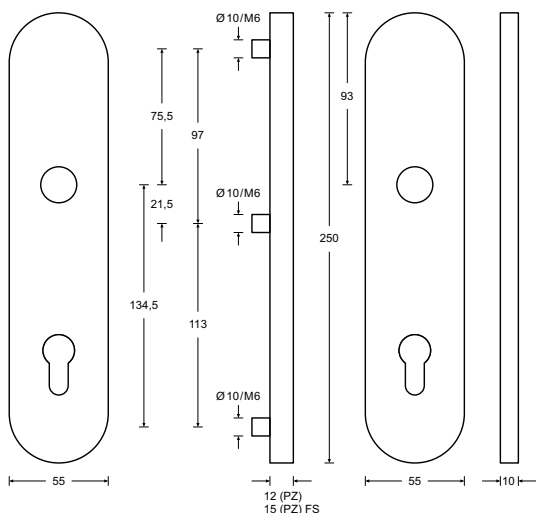

Drawing shows SK 3

Technical attributes

Exterior escutcheon	Round knob
Protection rating	3 / 4
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist	H 9 3 3 0 1 1 1 3 9 3 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist with protective cover	H 9 3 3 0 1 2 5 3 9 3 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist	H 9 3 3 0 1 1 5 3 9 3 0 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist with protective cover	H 9 3 3 0 1 2 1 3 9 3 0 0 0 0
PC 72 SK4 9mm spindle DIN L	H 9 3 3 0 1 2 1 4 9 1 0 0 0 0
PC 72 SK4 9mm spindle DIN R	H 9 3 3 0 1 2 1 4 9 2 0 0 0 0
PC 92 SK4 9mm spindle DIN L	H 9 3 3 0 1 2 5 4 9 1 0 0 0 0
PC 92 SK4 9mm spindle DIN R	H 9 3 3 0 1 2 5 4 9 2 0 0 0 0

Security fittings for wide style doors

on long plate, with U-shaped handle, with flat knob



Security fitting for wide style doors

The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906

Suitable mounting set

- Mounting set 7c and 8c (for SK 4) in the chapter „Accessories“

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 319N and 519N with 92 mm distance

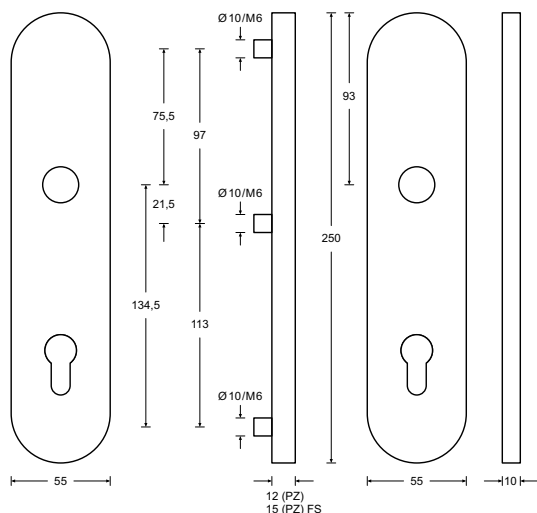

Drawing shows SK 3

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	3 / 4
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist	H 9 3 3 0 2 1 1 3 9 3 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist with protective cover	H 9 3 3 0 2 2 5 3 9 3 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist	H 9 3 3 0 2 1 5 3 9 3 0 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist with protective cover	H 9 3 3 0 2 2 1 3 9 3 0 0 0 0
PC 72 SK4 9mm spindle DIN L	H 9 3 3 0 2 2 1 4 9 1 0 0 0 0
PC 72 SK4 9mm spindle DIN R	H 9 3 3 0 2 2 1 4 9 2 0 0 0 0
PC 92 SK4 9mm spindle DIN L	H 9 3 3 0 2 2 5 4 9 1 0 0 0 0
PC 92 SK4 9mm spindle DIN R	H 9 3 3 0 2 2 5 4 9 2 0 0 0 0

Security fittings for wide style doors

on long plate, with C-shaped handle and round knob



Security fitting for wide style doors


The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 319N and 519N with 92 mm distance

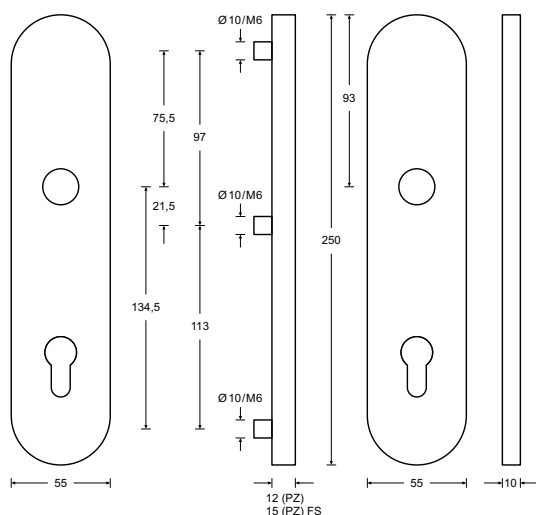

Technical attributes

Exterior escutcheon	Round knob
Protection rating	3
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H 93 4 0 1 1 1 3 9 3 1 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H 93 4 0 1 1 1 3 9 3 2 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H 93 4 0 1 1 1 3 9 3 3 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H 93 4 0 1 1 1 3 9 3 4 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H 93 4 0 1 1 1 3 9 3 5 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H 93 4 0 1 1 1 3 9 3 6 0 0 0

PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H 93 4 0 1 1 5 3 9 3 1 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H 93 4 0 1 1 5 3 9 3 2 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H 93 4 0 1 1 5 3 9 3 3 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H 93 4 0 1 1 5 3 9 3 4 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H 93 4 0 1 1 5 3 9 3 5 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H 93 4 0 1 1 5 3 9 3 6 0 0 0

Security fittings for wide style doors

on long plate, with C-shaped handle and round knob



Security fitting for wide style doors


The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 319N and 519N with 92 mm distance

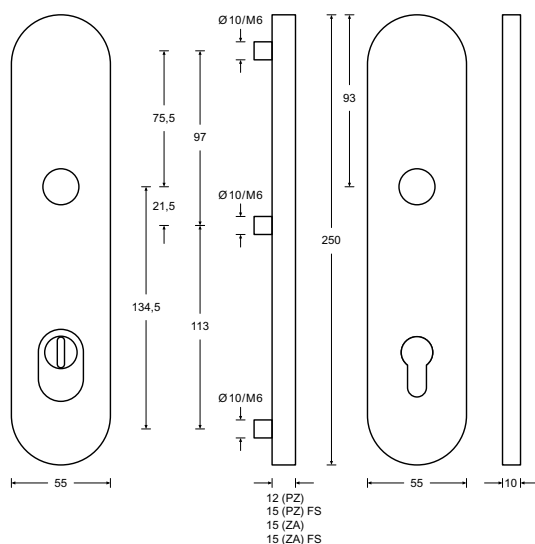

Drawing shows SK 3

Technical attributes

Exterior escutcheon	Round knob
Protection rating	3 / 4
Version	With protective cover
Handle	C-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H93401213931000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H93401213932000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H93401213933000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H93401213934000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H93401213935000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H93401213936000
PC 72 SK4 9mm spindle DIN L door leaf thickness 36-40mm	H93401214911000
PC 72 SK4 9mm spindle DIN L door leaf thickness 41-45mm	H93401214912000
PC 72 SK4 9mm spindle DIN L door leaf thickness 46-50mm	H93401214913000
PC 72 SK4 9mm spindle DIN L door leaf thickness 51-55mm	H93401214914000
PC 72 SK4 9mm spindle DIN L door leaf thickness 56-60mm	H93401214915000
PC 72 SK4 9mm spindle DIN L door leaf thickness 61-65mm	H93401214916000
PC 72 SK4 9mm spindle DIN R door leaf thickness 36-40mm	H93401214921000
PC 72 SK4 9mm spindle DIN R door leaf thickness 41-45mm	H93401214922000
PC 72 SK4 9mm spindle DIN R door leaf thickness 46-50mm	H93401214923000
PC 72 SK4 9mm spindle DIN R door leaf thickness 51-55mm	H93401214924000
PC 72 SK4 9mm spindle DIN R door leaf thickness 56-60mm	H93401214925000
PC 72 SK4 9mm spindle DIN R door leaf thickness 61-65mm	H93401214926000

Further variants on the next page

Security fittings for wide style doors on long plate, with C-shaped handle and round knob

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H 9 3 4 0 1 2 5 3 9 3 1 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H 9 3 4 0 1 2 5 3 9 3 2 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H 9 3 4 0 1 2 5 3 9 3 3 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H 9 3 4 0 1 2 5 3 9 3 4 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H 9 3 4 0 1 2 5 3 9 3 5 0 0 0
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H 9 3 4 0 1 2 5 3 9 3 6 0 0 0
PC 92 SK4 9mm spindle DIN L door leaf thickness 36-40mm	H 9 3 4 0 1 2 5 4 9 1 1 0 0 0
PC 92 SK4 9mm spindle DIN L door leaf thickness 41-45mm	H 9 3 4 0 1 2 5 4 9 1 2 0 0 0
PC 92 SK4 9mm spindle DIN L door leaf thickness 46-50mm	H 9 3 4 0 1 2 5 4 9 1 3 0 0 0
PC 92 SK4 9mm spindle DIN L door leaf thickness 51-55mm	H 9 3 4 0 1 2 5 4 9 1 4 0 0 0
PC 92 SK4 9mm spindle DIN L door leaf thickness 56-60mm	H 9 3 4 0 1 2 5 4 9 1 5 0 0 0
PC 92 SK4 9mm spindle DIN L door leaf thickness 61-65mm	H 9 3 4 0 1 2 5 4 9 1 6 0 0 0
PC 92 SK4 9mm spindle DIN R door leaf thickness 36-40mm	H 9 3 4 0 1 2 5 4 9 2 1 0 0 0
PC 92 SK4 9mm spindle DIN R door leaf thickness 41-45mm	H 9 3 4 0 1 2 5 4 9 2 2 0 0 0
PC 92 SK4 9mm spindle DIN R door leaf thickness 46-50mm	H 9 3 4 0 1 2 5 4 9 2 3 0 0 0
PC 92 SK4 9mm spindle DIN R door leaf thickness 51-55mm	H 9 3 4 0 1 2 5 4 9 2 4 0 0 0
PC 92 SK4 9mm spindle DIN R door leaf thickness 56-60mm	H 9 3 4 0 1 2 5 4 9 2 5 0 0 0
PC 92 SK4 9mm spindle DIN R door leaf thickness 61-65mm	H 9 3 4 0 1 2 5 4 9 2 6 0 0 0

Security fittings for wide style doors on long plate, with C-shaped handle and flat knob



Security fitting for wide style doors


The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 319N and 519N with 92 mm distance

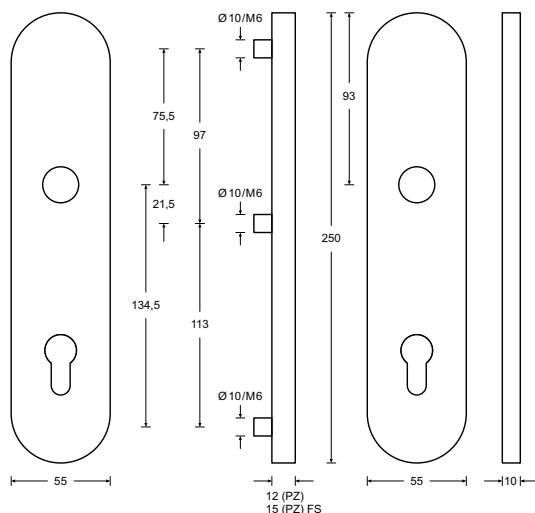

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	3
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H93402113931000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H93402113932000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H93402113933000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H93402113934000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H93402113935000
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H93402113936000

PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H93402153931000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H93402153932000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H93402153933000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H93402153934000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H93402153935000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H93402153936000

Security fittings for wide style doors on long plate, with C-shaped handle and flat knob



Security fitting for wide style doors


The security fitting for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Notice

- Compatible with locks of series N11**
- Compatible with locks of series 319N and 519N with 92 mm distance

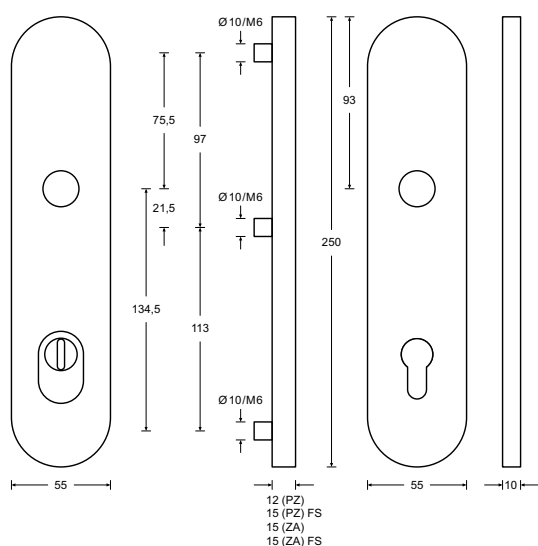

Drawing shows SK 3

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	3 / 4
Version	With protective cover
Handle	C-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H 93 4 0 2 2 1 3 9 3 1 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H 93 4 0 2 2 1 3 9 3 2 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H 93 4 0 2 2 1 3 9 3 3 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H 93 4 0 2 2 1 3 9 3 4 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H 93 4 0 2 2 1 3 9 3 5 0 0 0
PC 72 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H 93 4 0 2 2 1 3 9 3 6 0 0 0
PC 72 SK4 9mm spindle DIN L door leaf thickness 36-40mm	H 93 4 0 2 2 1 4 9 1 1 0 0 0
PC 72 SK4 9mm spindle DIN L door leaf thickness 41-45mm	H 93 4 0 2 2 1 4 9 1 2 0 0 0
PC 72 SK4 9mm spindle DIN L door leaf thickness 46-50mm	H 93 4 0 2 2 1 4 9 1 3 0 0 0
PC 72 SK4 9mm spindle DIN L door leaf thickness 51-55mm	H 93 4 0 2 2 1 4 9 1 4 0 0 0
PC 72 SK4 9mm spindle DIN L door leaf thickness 56-60mm	H 93 4 0 2 2 1 4 9 1 5 0 0 0
PC 72 SK4 9mm spindle DIN L door leaf thickness 61-65mm	H 93 4 0 2 2 1 4 9 1 6 0 0 0
PC 72 SK4 9mm spindle DIN R door leaf thickness 36-40mm	H 93 4 0 2 2 1 4 9 2 1 0 0 0
PC 72 SK4 9mm spindle DIN R door leaf thickness 41-45mm	H 93 4 0 2 2 1 4 9 2 2 0 0 0
PC 72 SK4 9mm spindle DIN R door leaf thickness 46-50mm	H 93 4 0 2 2 1 4 9 2 3 0 0 0
PC 72 SK4 9mm spindle DIN R door leaf thickness 51-55mm	H 93 4 0 2 2 1 4 9 2 4 0 0 0
PC 72 SK4 9mm spindle DIN R door leaf thickness 56-60mm	H 93 4 0 2 2 1 4 9 2 5 0 0 0
PC 72 SK4 9mm spindle DIN R door leaf thickness 61-65mm	H 93 4 0 2 2 1 4 9 2 6 0 0 0


Further variants on the next page

Security fittings for wide style doors on long plate, with C-shaped handle and flat knob

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 33-37mm	H 93 40 22 5 393 1 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 38-42mm	H 93 40 22 5 393 2 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 43-47mm	H 93 40 22 5 393 3 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 48-52mm	H 93 40 22 5 393 4 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 53-57mm	H 93 40 22 5 393 5 000
PC 92 SK3 9mm spindle DIN L/R without spring assist door leaf thickness 58-62mm	H 93 40 22 5 393 6 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 36-40mm	H 93 40 22 5 491 1 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 41-45mm	H 93 40 22 5 491 2 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 46-50mm	H 93 40 22 5 491 3 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 51-55mm	H 93 40 22 5 491 4 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 56-60mm	H 93 40 22 5 491 5 000
PC 92 SK4 9mm spindle DIN L door leaf thickness 61-65mm	H 93 40 22 5 491 6 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 36-40mm	H 93 40 22 5 492 1 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 41-45mm	H 93 40 22 5 492 2 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 46-50mm	H 93 40 22 5 492 3 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 51-55mm	H 93 40 22 5 492 4 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 56-60mm	H 93 40 22 5 492 5 000
PC 92 SK4 9mm spindle DIN R door leaf thickness 61-65mm	H 93 40 22 5 492 6 000

Standard fittings for wide style doors

as half set rose inside, with L-shaped handle no outer side

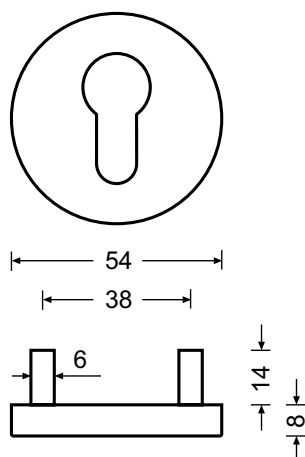

Half-set for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality L-shaped handle as half-set rose on the inside blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied without an exterior side.

The advantages at a glance



- Prepared for your door thickness
- Elegant bevel handle

Technical attributes	
Exterior escutcheon	No outside
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Half-set rose inside

Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L door leaf thickness 37-50mm	H 3 8 1 0 X 1 X 0 8 1 1 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 51-60mm	H 3 8 1 0 X 1 X 0 8 1 2 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 61-70mm	H 3 8 1 0 X 1 X 0 8 1 3 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 71-80mm	H 3 8 1 0 X 1 X 0 8 1 4 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 81-90mm	H 3 8 1 0 X 1 X 0 8 1 5 0 0 0
PC rose SK0 8mm spindle DIN L door leaf thickness 91-100mm	H 3 8 1 0 X 1 X 0 8 1 6 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 37-50mm	H 3 8 1 0 X 1 X 0 8 2 1 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 51-60mm	H 3 8 1 0 X 1 X 0 8 2 2 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 61-70mm	H 3 8 1 0 X 1 X 0 8 2 3 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 71-80mm	H 3 8 1 0 X 1 X 0 8 2 4 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 81-90mm	H 3 8 1 0 X 1 X 0 8 2 5 0 0 0
PC rose SK0 8mm spindle DIN R door leaf thickness 91-100mm	H 3 8 1 0 X 1 X 0 8 2 6 0 0 0

Standard fittings for wide style doors

as half set rose inside, with J-shaped handle no outer side



Half-set for wide style doors

The standard project fitting for wide style doors is suitable for use on doors without special requirements. The high-quality J-shaped handle as half-set rose on the inside blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied without an exterior side.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle


Suitable mounting set

- Mounting set 1a in the chapter „Accessories“

Technical attributes	
Exterior escutcheon	No outside
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	8 mm
Material	Standard, brushed stainless steel
Mounting	Half-set rose inside

Article / Feature	Order no.
PC rose SK0 8mm spindle DIN L	H 3 8 2 0 X 1 X 0 8 1 0 0 0 0
PC rose SK0 8mm spindle DIN R	H 3 8 2 0 X 1 X 0 8 2 0 0 0 0

Fire protection fittings with panic handle for wide style doors as inactive leaf sets and C-shaped handle, blank

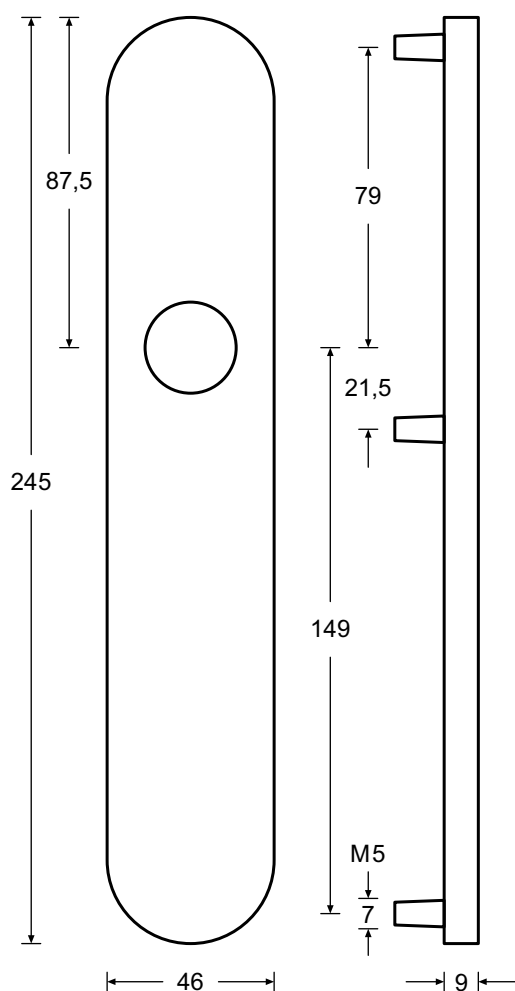

Inactive leaf door set for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality C-shaped handle as a inactive leaf set blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is delivered blank.

The advantages at a glance

- Prepared for your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179


Technical attributes

Exterior escutcheon	Blank
Protection rating	0
Version	Without drilled hole
Handle	C-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Inactive leaf set

Article / Feature

Article / Feature	Order no.
SK0 9mm spindle DIN L without spring assist door leaf thickness 36-49mm	H 7 7 4 0 3 X Z 0 9 4 1 0 0 0
SK0 9mm spindle DIN L without spring assist door leaf thickness 50-59mm	H 7 7 4 0 3 X Z 0 9 4 2 0 0 0
SK0 9mm spindle DIN L without spring assist door leaf thickness 60-69mm	H 7 7 4 0 3 X Z 0 9 4 3 0 0 0
SK0 9mm spindle DIN L without spring assist door leaf thickness 70-79mm	H 7 7 4 0 3 X Z 0 9 4 4 0 0 0
SK0 9mm spindle DIN L without spring assist door leaf thickness 80-89mm	H 7 7 4 0 3 X Z 0 9 4 5 0 0 0
SK0 9mm spindle DIN L without spring assist door leaf thickness 90-99mm	H 7 7 4 0 3 X Z 0 9 4 6 0 0 0
SK0 9mm spindle DIN R without spring assist door leaf thickness 36-49mm	H 7 7 4 0 3 X Z 0 9 5 1 0 0 0
SK0 9mm spindle DIN R without spring assist door leaf thickness 50-59mm	H 7 7 4 0 3 X Z 0 9 5 2 0 0 0
SK0 9mm spindle DIN R without spring assist door leaf thickness 60-69mm	H 7 7 4 0 3 X Z 0 9 5 3 0 0 0
SK0 9mm spindle DIN R without spring assist door leaf thickness 70-79mm	H 7 7 4 0 3 X Z 0 9 5 4 0 0 0
SK0 9mm spindle DIN R without spring assist door leaf thickness 80-89mm	H 7 7 4 0 3 X Z 0 9 5 5 0 0 0
SK0 9mm spindle DIN R without spring assist door leaf thickness 90-99mm	H 7 7 4 0 3 X Z 0 9 5 6 0 0 0

Fire protection fittings with panic handle for wide style doors as inactive leaf sets and U-shaped handle, blank

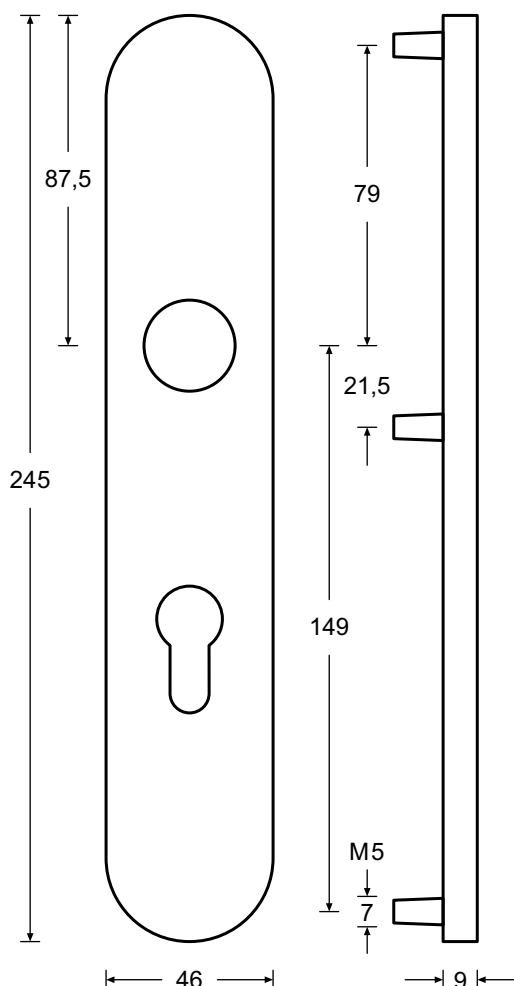

Inactive leaf door set for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 180. The high-quality U-shaped handle as an inactive leaf set blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is delivered blank.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 6a in the chapter „Accessories“

Technical attributes


Exterior escutcheon	Blank
Protection rating	0
Version	Without drilled hole
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Inactive leaf set

Article / Feature

Article / Feature	Order no.
SK0 9mm spindle DIN L without spring assist	H 7 7 3 0 3 X Z 0 9 4 0 0 0 0
SK0 9mm spindle DIN R without spring assist	H 7 7 3 0 3 X Z 0 9 5 0 0 0 0

Fire protection fittings with panic handle for wide style doors

as inactive leaf sets and KU-shaped handle, blank

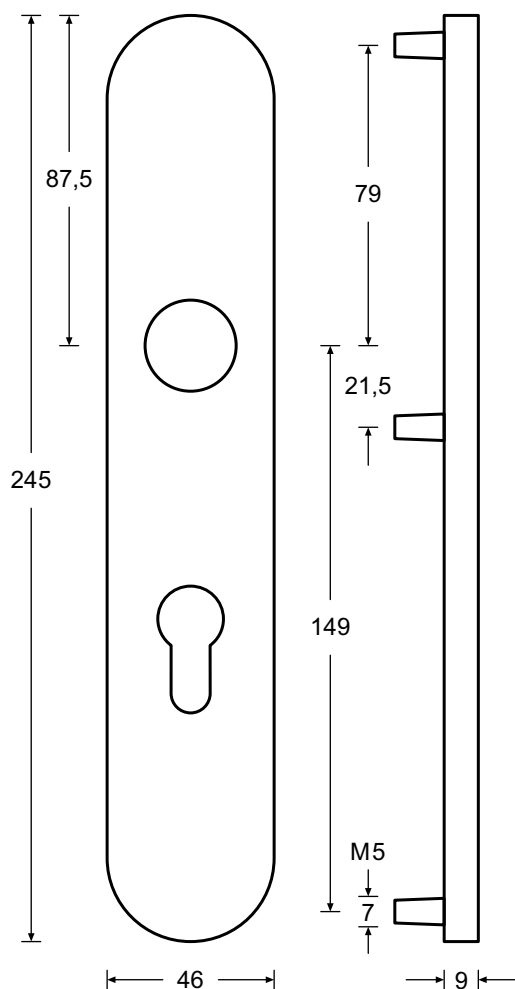

Fire protection fitting with panic handle for wide style doors

The fire protection fitting with panic handle for wide style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 181. The high-quality KU-shaped handle as an inactive leaf set blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is delivered blank.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 6a in the chapter „Accessories“

Technical attributes

Exterior escutcheon	Blank
Protection rating	0
Version	Without drilled hole
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Inactive leaf set


Article / Feature

Article / Feature	Order no.
SK0 9mm spindle DIN L without spring assist	H 7 7 7 0 3 X Z 0 9 4 0 0 0 0
SK0 9mm spindle DIN R without spring assist	H 7 7 7 0 3 X Z 0 9 5 0 0 0 0



Fittings for narrow style doors

Fire protection fittings for narrow style doors on oval rose, with L-shaped handle and outside handle

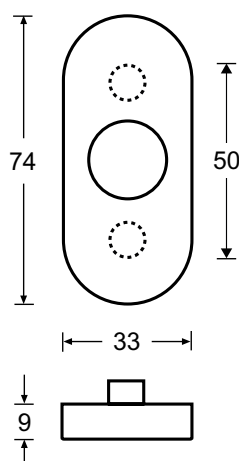

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality L-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 9a in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose


Article / Feature

PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 Z 1 0 0 1 X 0 9 0 0 0 0

Fire protection fittings for narrow style doors on oval rose, with L-shaped handle and round knob

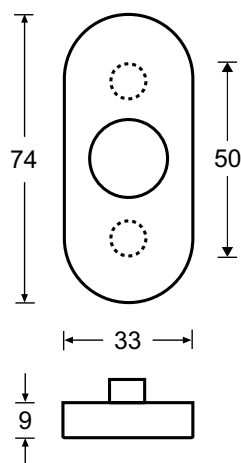

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets the requirements of door handle fittings for fire and smoke protection doors according to DIN 18273 and thus is suitable for doors with escape door function according to EN 179. The high-quality L-shaped handle on oval rose elegantly blends in each object. As a modern and corrosion-resistant material the long-lasting brushed stainless steel is suitable for each area that requires quality. This model is delivered with round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 9c in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes

Exterior escutcheon	Round knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose


Article / Feature

PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 Z 1 0 1 1 X 0 9 0 0 0 0 0

Fire protection fittings for narrow style doors on oval rose, with L-shaped handle and flat knob

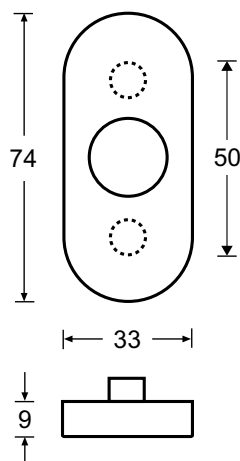

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets the requirements of door handle fittings for fire and smoke protection doors according to DIN 18273 and thus is suitable for doors with escape door function according to EN 179. The high-quality L-shaped handle on oval rose elegantly blends in each object. As a modern and corrosion-resistant material the long-lasting brushed stainless steel is suitable for each area that requires quality. This model is delivered with flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 9c in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	0
Handle	L-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose

Article / Feature


PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 Z 1 0 2 1 X 0 9 0 0 0 0

Fire protection fittings for narrow style doors

on oval rose, with J-shaped handle and outside handle

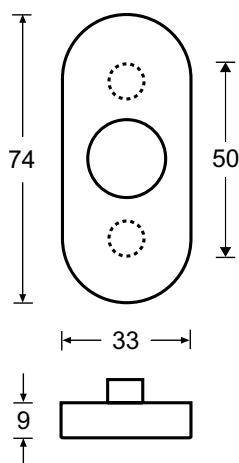

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 9a in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose



Article / Feature

PC SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 Z 2 0 0 1 X 0 9 0 0 0 0 0

Fire protection fittings for narrow style doors on oval rose, with J-shaped handle and round knob

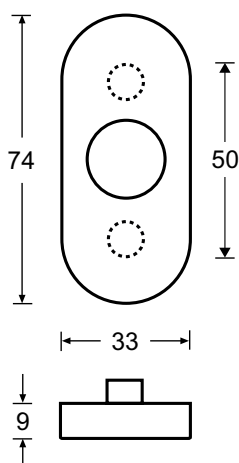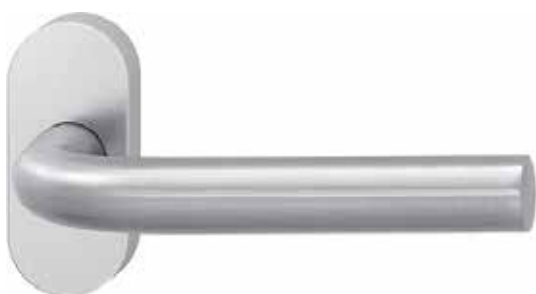

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 9c in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes

Exterior escutcheon	Round knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose


Article / Feature

PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 Z 2 0 1 1 X 0 9 0 0 0 0

Fire protection fittings for narrow style doors on oval rose, with J-shaped handle and flat knob

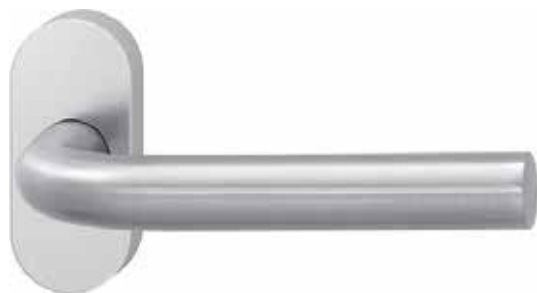

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 9c in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes


Exterior escutcheon	Flat knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose

Article / Feature

PC rose SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 Z 2 0 2 1 X 0 9 0 0 0 0 0

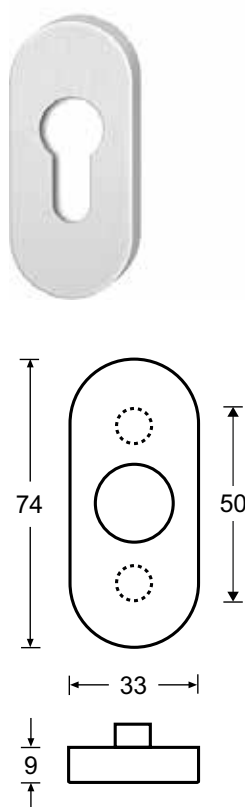

Fire protection fittings for narrow style doors on long plate, with J-shaped handle and outside handle



Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 10a in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

Technical attributes


Exterior escutcheon	Handle
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

PC 92 SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 3 2 0 0 1 5 0 9 0 0 0 0

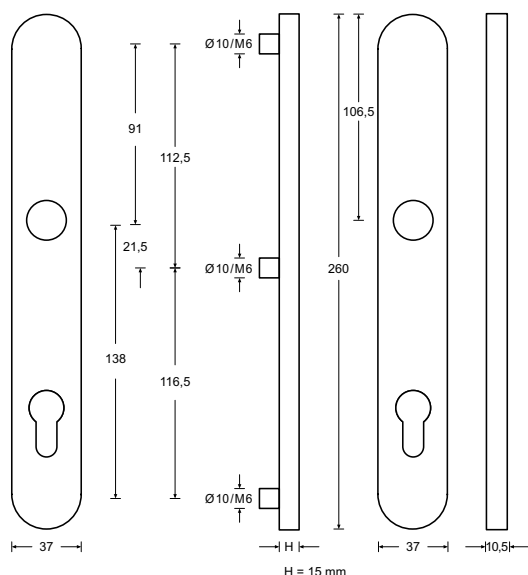




The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

- Mounting set 10c in the chapter „Accessories“


- Compatible with locks of series N1550

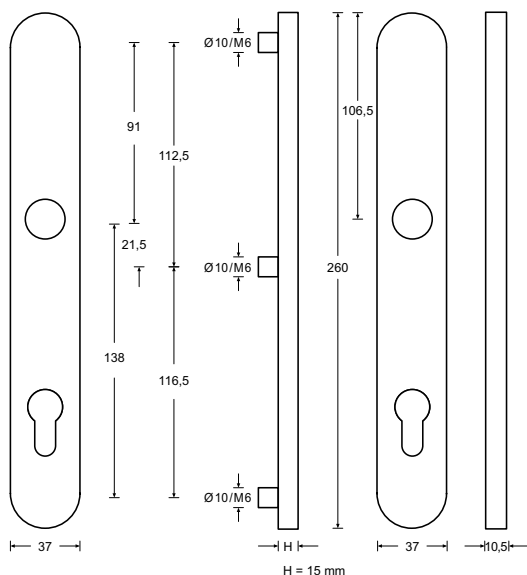

Technical attributes	
Exterior escutcheon	Round knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK0 9mm spindle DIN L/R with spring assist	H 43 20 115 090 0000

Fire protection fittings for narrow style doors on long plate, with J-shaped handle and flat knob

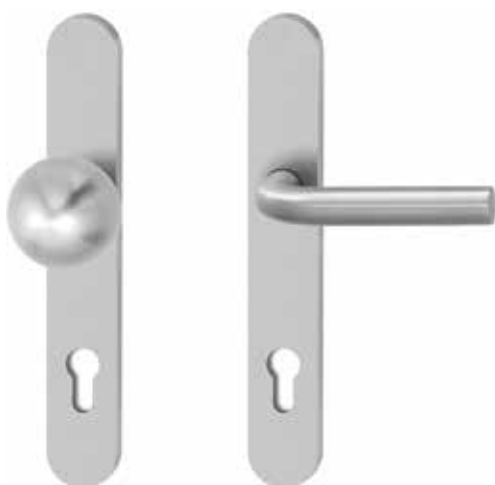

Fire protection fitting for narrow style doors

The fire protection fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273. The high-quality J-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N1550

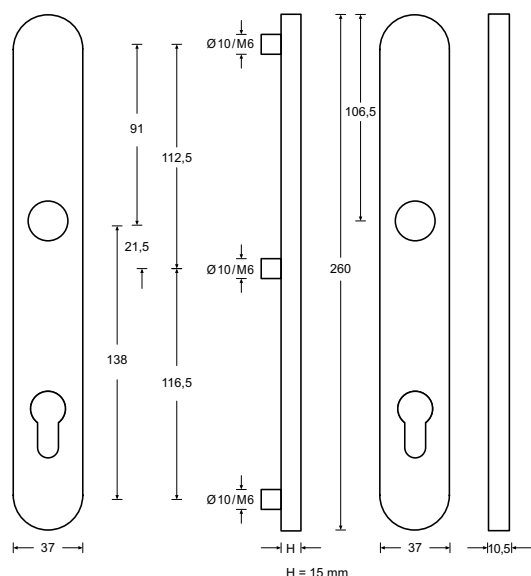

Technical attributes

Exterior escutcheon	Flat knob
Protection rating	0
Handle	J-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature


PC 92 SK0 9mm spindle DIN L/R with spring assist

Order no.

H 4 3 2 0 2 1 5 0 9 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on oval rose, with U-shaped handle

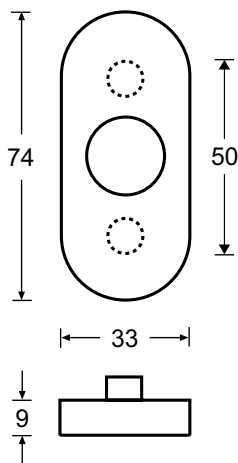

Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality U-shaped handle on oval rose blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 9b and 9c (for half spindle fittings) in the chapter „Accessories“

Notice


- Compatible with locks of series N16**, 309N, 809N und 509N

Technical attributes	
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose

Article / Feature	Order no.
with outside handle PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 3 0 0 1 X 0 9 0 0 0 0 0
with round knob PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 3 0 1 1 X 0 9 0 0 0 0 0
with flat knob PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 3 0 2 1 X 0 9 0 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on oval rose, with C-shaped handle

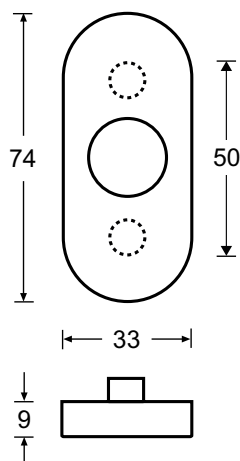

Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style meets the requirements of door handle fittings for fire and smoke protection doors according to DIN 18273 and thus is suitable for doors with escape door function according to EN 179. The high-quality C-shaped handle on oval rose elegantly blends in each object. As a modern and corrosion-resistant material the long-lasting brushed stainless steel is suitable for each area that requires quality.

The advantages at a glance

- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 9b and 9c (for half spindle fittings) in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 309N, 809N und 509N

Technical attributes


Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose

Article / Feature

Article / Feature	Order no.
with outside handle PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 4 0 0 1 X 0 9 0 0 0 0 0
with round knob PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 4 0 1 1 X 0 9 0 0 0 0 0
with flat knob PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 4 0 2 1 X 0 9 0 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on oval rose, with KU-shaped handle

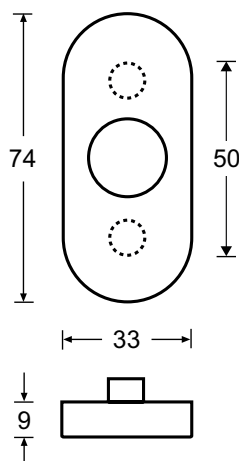

Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style meets the requirements of door handle fittings for fire and smoke protection doors according to DIN 18273 and thus is suitable for doors with escape door function according to EN 179. The high-quality KU-shaped handle on oval rose elegantly blends in each object. As a modern and corrosion-resistant material the long-lasting brushed stainless steel is suitable for each area that requires quality.

The advantages at a glance

- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 9b and 9c (for half spindle fittings) in the chapter „Accessories“

Notice


- Compatible with locks of series N16**, 309N, 809N und 509N

Technical attributes	
Protection rating	0
Handle	KU-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose

Article / Feature	Order no.
with outside handle PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 7 0 0 1 X 0 9 0 0 0 0 0
with round knob PC rose SK0 9mm spindle, DIN L with spring assist	H 6 Z 7 0 1 1 X 0 9 1 0 0 0 0
with round knob PC rose SK0 9mm spindle, DIN R with spring assist	H 6 Z 7 0 1 1 X 0 9 2 0 0 0 0
with flat knob PC rose SK0 9mm spindle, DIN L with spring assist	H 6 Z 7 0 2 1 X 0 9 1 0 0 0 0
with flat knob PC rose SK0 9mm spindle, DIN R with spring assist	H 6 Z 7 0 2 1 X 0 9 2 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on oval rose, with KC-shaped handle

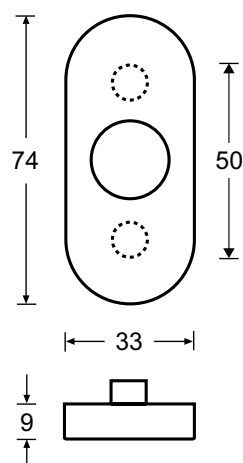

Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style meets the requirements of door handle fittings for fire and smoke protection doors according to DIN 18273 and thus is suitable for doors with escape door function according to EN 179. The high-quality KC-shaped handle on oval rose elegantly blends in each object. As a modern and corrosion-resistant material the long-lasting brushed stainless steel is suitable for each area that requires quality.

The advantages at a glance

- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 9b and 9c (for half spindle fittings) in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 309N, 809N und 509N

Technical attributes	
Protection rating	0
Handle	KC-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Oval rose

Article / Feature	Order no.
with outside handle PC rose SK0 9mm spindle, DIN L/R with spring assisted	H 6 Z 8 0 0 1 X 0 9 0 0 0 0 0
with round knob PC rose SK0 9mm spindle, DIN L with spring assist	H 6 Z 8 0 1 1 X 0 9 1 0 0 0 0
with round knob PC rose SK0 9mm spindle, DIN R with spring assist	H 6 Z 8 0 1 1 X 0 9 2 0 0 0 0
with flat knob PC rose SK0 9mm spindle, DIN L with spring assist	H 6 Z 8 0 2 1 X 0 9 1 0 0 0 0
with flat knob PC rose SK0 9mm spindle, DIN R with spring assist	H 6 Z 8 0 2 1 X 0 9 2 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on long plate, with U-shaped handle



Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 10b and 10c (for half spindle fittings) in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 309N, 809N und 509N

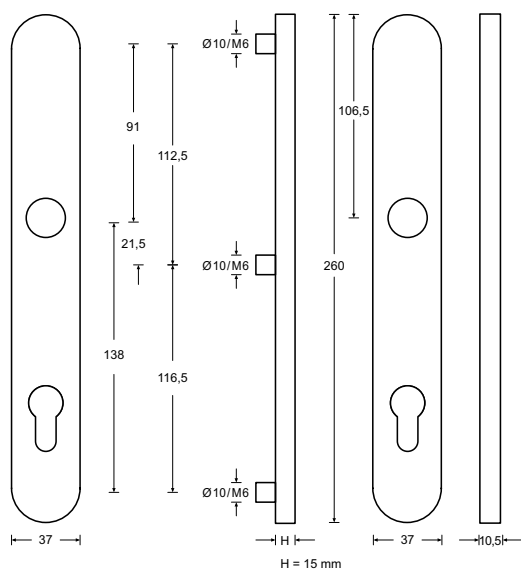

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	U-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK0 9mm spindle, DIN L/R with spring assist, outside handle	H 6 3 3 0 0 1 5 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle, DIN L/R with spring assist, round knob	H 6 3 3 0 1 1 5 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle, DIN L/R with sprint assist, flat knob	H 6 3 3 0 2 1 5 0 9 0 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on long plate, with C-shaped handle



Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality C-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 10b and 10c (for half spindle fittings) in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 309N, 809N und 509N

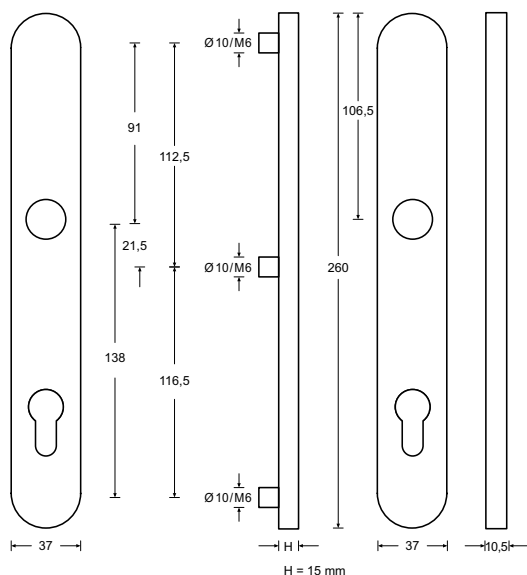

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	C-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK0 9mm spindle, DIN L/R with spring assist, outside handle	H 6 3 4 0 0 1 5 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle, DIN L/R with spring assist, round knob	H 6 3 4 0 1 1 5 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle, DIN L/R with sprint assist, flat knob	H 6 3 4 0 2 1 5 0 9 0 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on long plate, with KU-shaped handle



Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 10b and 10c (for half spindle fittings) in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 309N and 809N

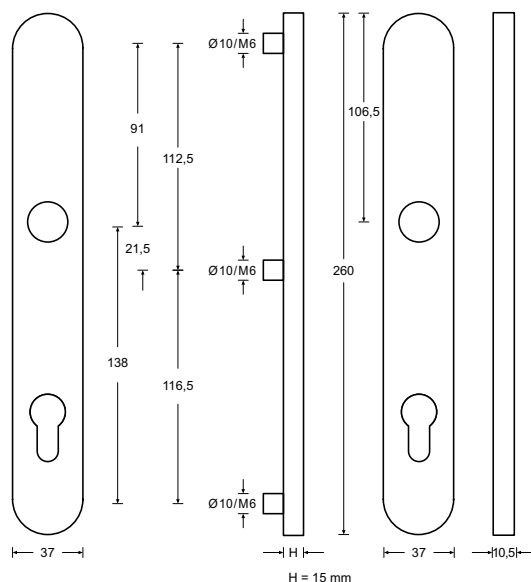

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	KU-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK0 9mm spindle, DIN L/R with spring assist, outside handle	H 6 3 7 0 0 1 5 0 9 0 0 0 0 0
PC 92 SK0 9mm spindle, DIN L with spring assist, round knob	H 6 3 7 0 1 1 5 0 9 1 0 0 0 0
PC 92 SK0 9mm spindle, DIN R with spring assist, round knob	H 6 3 7 0 1 1 5 0 9 2 0 0 0 0
PC 92 SK0 9mm spindle, DIN L with spring assist, flat knob	H 6 3 7 0 2 1 5 0 9 1 0 0 0 0
PC 92 SK0 9mm spindle, DIN R with spring assist, flat knob	H 6 3 7 0 2 1 5 0 9 2 0 0 0 0

Fire protection fittings with panic handle for narrow style doors

on long plate, with KC-shaped handle



Fire protection fitting with panic handle for narrow style doors

The fire protection fitting with panic handle for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179

Suitable mounting set

- Mounting set 10b and 10c (for half spindle fittings) in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 309N, 809N und 509N

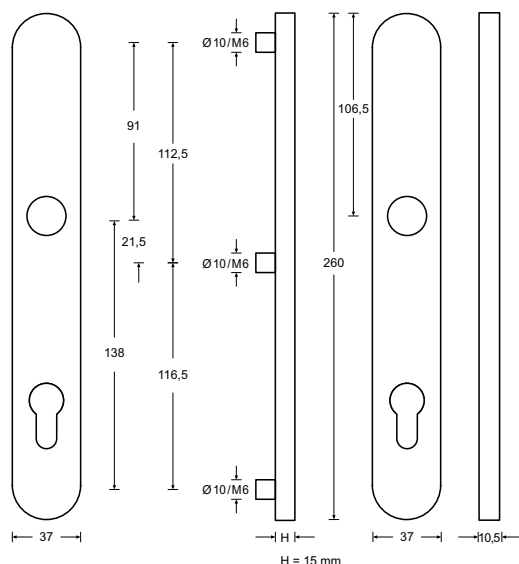

Technical attributes

Exterior escutcheon	Handle
Protection rating	0
Handle	KC-shaped
Type of cylinder	Profile cylinder
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK0 9mm spindle, DIN L/R with spring assist, outside fitting	H 63 8 001 509 00000
PC 92 SK0 9mm spindle, DIN L with spring assist, round knob	H 63 8 011 509 10000
PC 92 SK0 9mm spindle, DIN R with spring assist, round knob	H 63 8 011 509 20000
PC 92 SK0 9mm spindle, DIN L with spring assist, flat knob	H 63 8 021 509 10000
PC 92 SK0 9mm spindle, DIN R with spring assist, flat knob	H 63 8 021 509 20000

Security fittings for narrow style doors

on long plate, with U-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

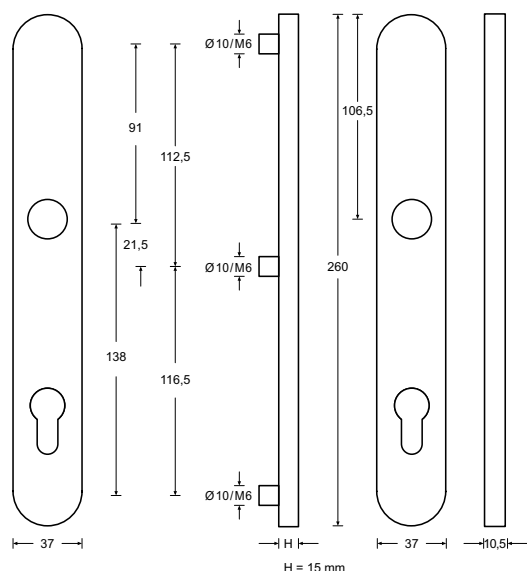

Technical attributes


Distance	92 mm
Exterior escutcheon	Handle
Protection rating	2
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle DIN L/R with spring assist	H 8 3 3 0 0 1 5 2 9 0 0 0 0 0
PC 92 SK2 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 3 0 0 2 5 2 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with round knob

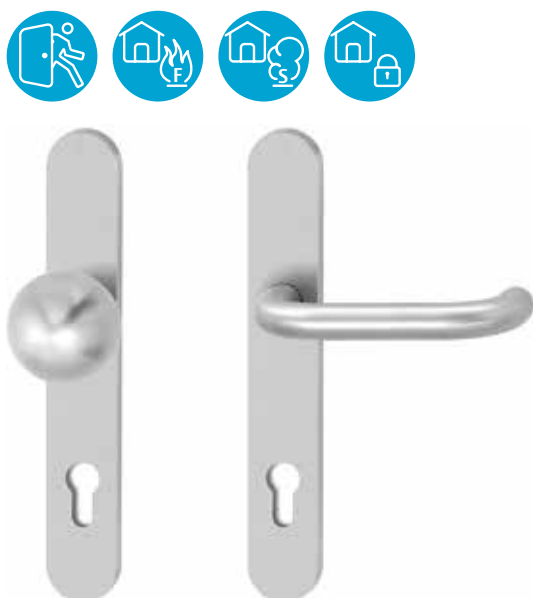

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

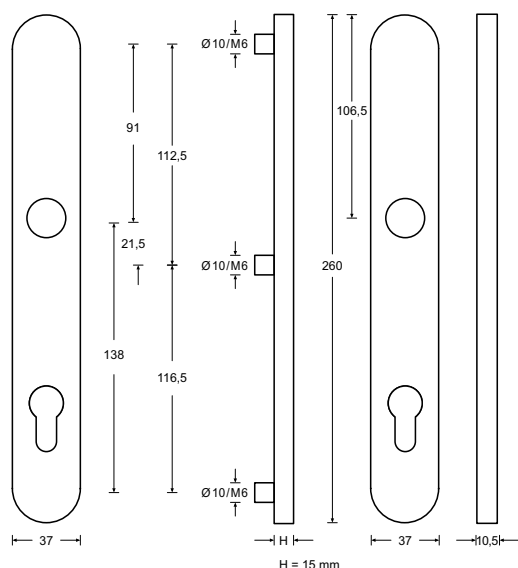

Technical attributes


Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	2
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle DIN L/R with spring assist	H 8 3 3 0 1 1 5 2 9 0 0 0 0 0
PC 92 SK2 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 3 0 1 2 5 2 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with flat knob

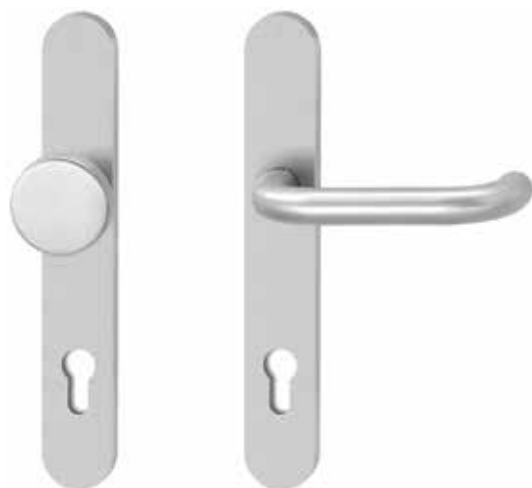

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

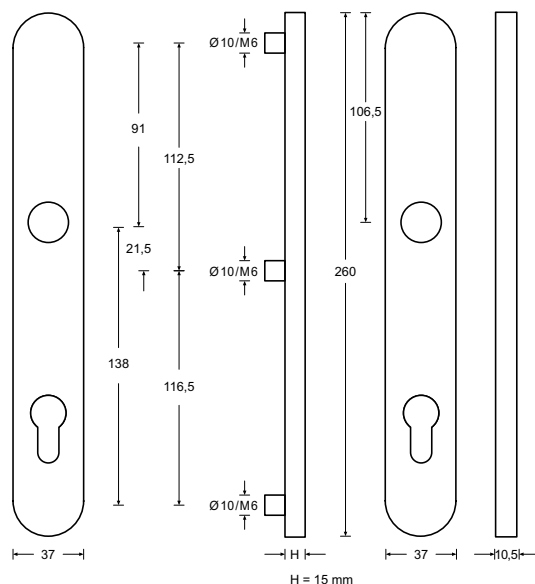

Technical attributes

Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	2
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle DIN L/R with spring assist	H 8 3 3 0 2 1 5 2 9 0 0 0 0 0
PC 92 SK2 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 3 0 2 2 5 2 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

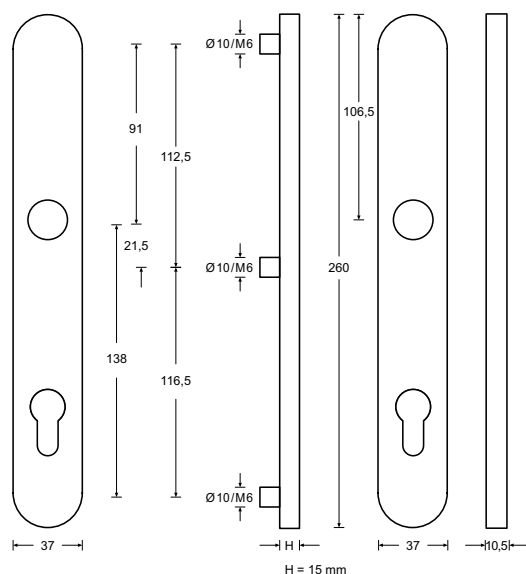

Technical attributes


Distance	92 mm
Exterior escutcheon	Handle
Protection rating	3
Handle	U-shaped
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R with spring assist	H 8 3 3 0 0 1 5 3 9 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 3 0 0 2 5 3 9 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with round knob

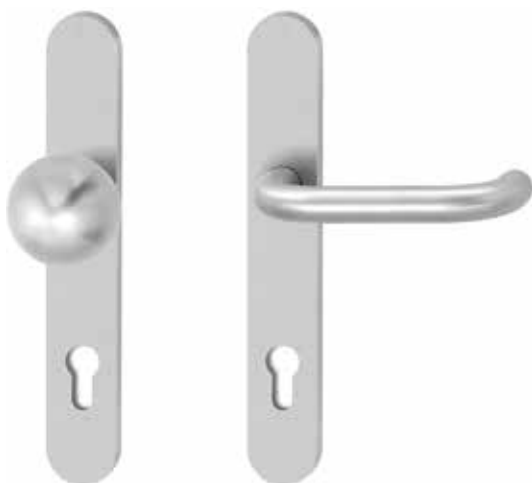

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

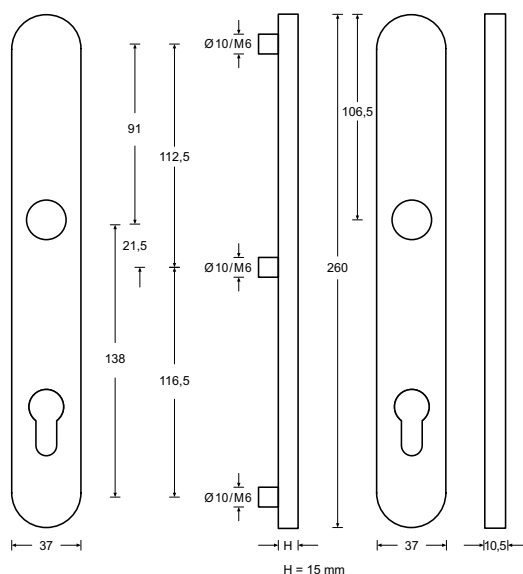

Technical attributes


Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	3
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R with spring assist	H 8 3 3 0 1 1 5 3 9 0 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 3 0 1 2 5 3 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with flat knob

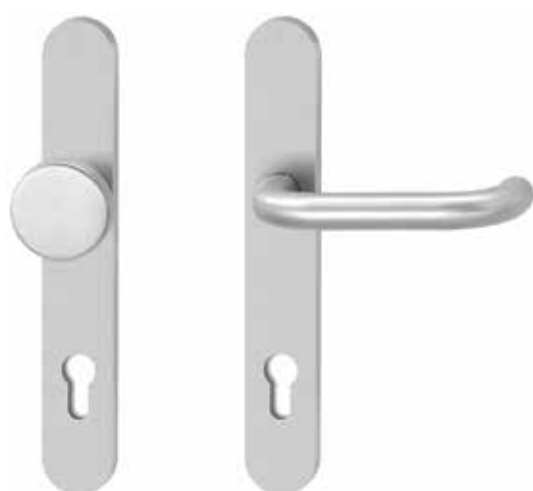

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

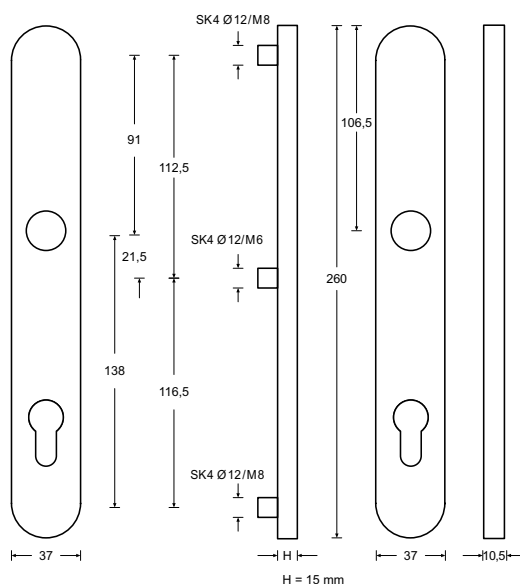

Technical attributes

Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	3
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R with spring assist	H 8 3 3 0 2 1 5 3 9 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 3 0 2 2 5 3 9 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

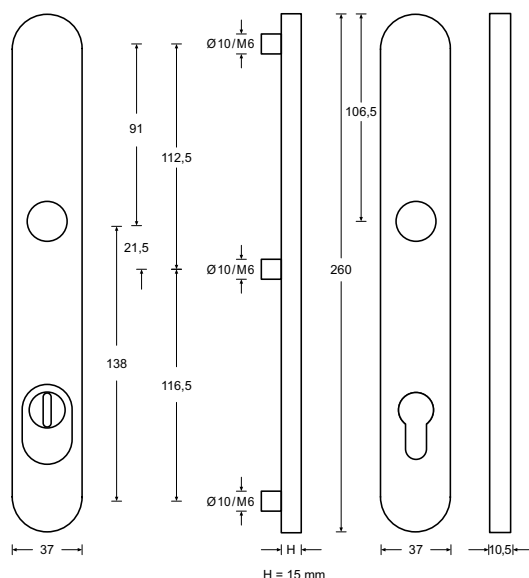

Technical attributes

Distance	92 mm
Exterior escutcheon	Handle
Protection rating	4
Version	With protective cover
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature


PC 92 SK4 9mm spindle, DIN L/R without spring assist

Order no.

H 8 3 3 0 0 2 5 4 9 3 0 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with round knob

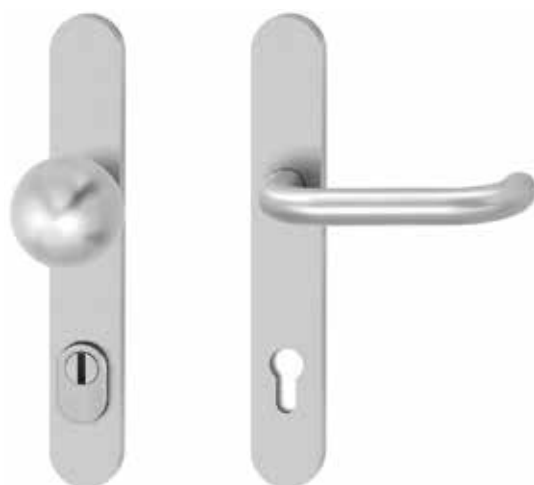

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

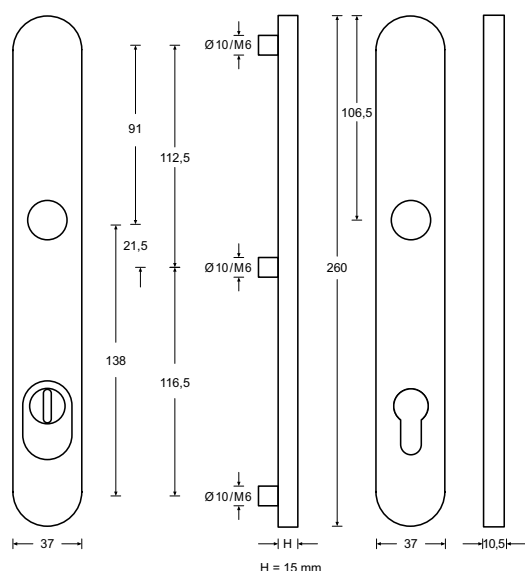

Technical attributes

Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	4
Version	With protective cover
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

PC 92 SK4 9mm spindle, DIN L/R without spring assist

Order no.

H 8 3 3 0 1 2 5 4 9 3 0 0 0

Security fittings for narrow style doors

on long plate, with U-shaped handle, with flat knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality U-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

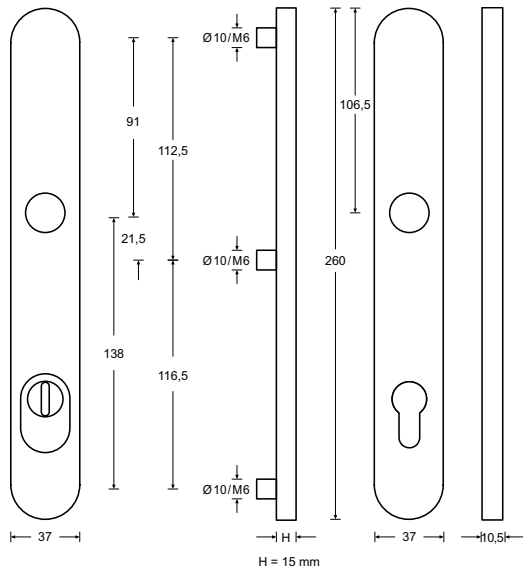

Technical attributes	
Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	4
Version	With protective cover
Handle	U-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK4 9mm spindle, DIN L/R without spring assist	H 8 3 3 0 2 2 5 4 9 3 0 0 0 0

Security fittings for narrow style doors on long plate, with KC-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

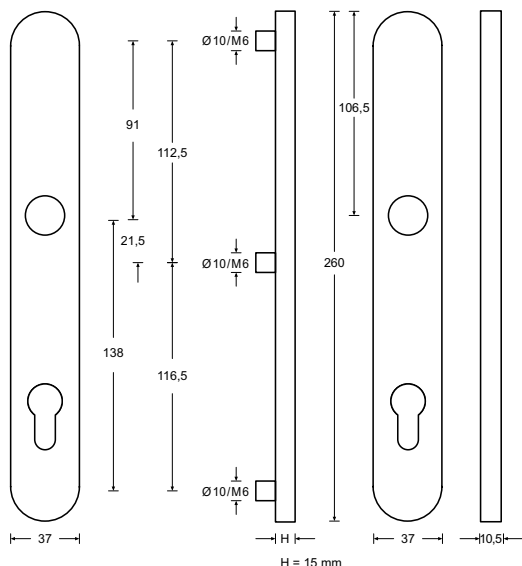

Technical attributes


Distance	92 mm
Exterior escutcheon	Handle
Protection rating	2
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle DIN L/R with spring assist	H 8 3 8 0 0 1 5 2 9 0 0 0 0 0
PC 92 SK2 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 8 0 0 2 5 2 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with round knob

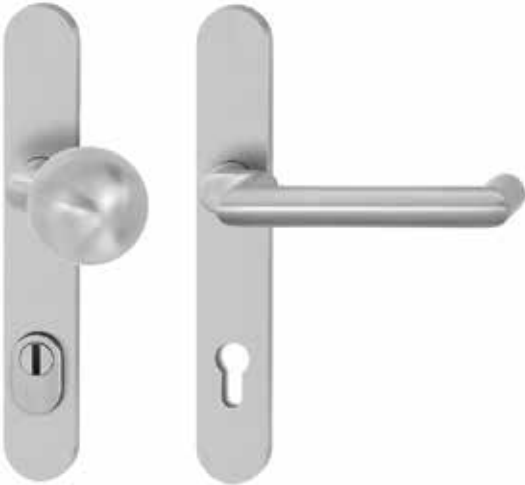

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

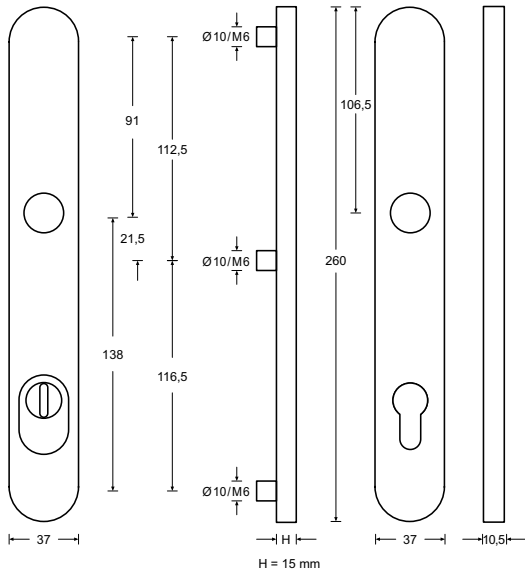


Technical attributes	
Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	2
Version	With protective cover
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK 2 9 mm spindle DIN L with spring assist with protective cover	H 8 3 8 0 1 2 5 2 9 1 0 0 0 0
PC 92 SK 2 9 mm spindle DIN R with spring assist with protective cover	H 8 3 8 0 1 2 5 2 9 2 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with flat knob

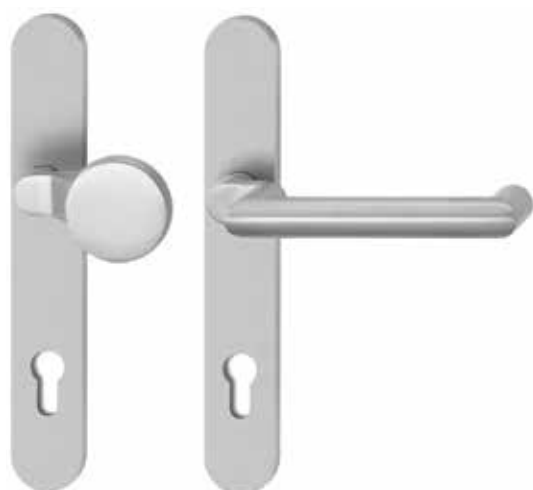

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

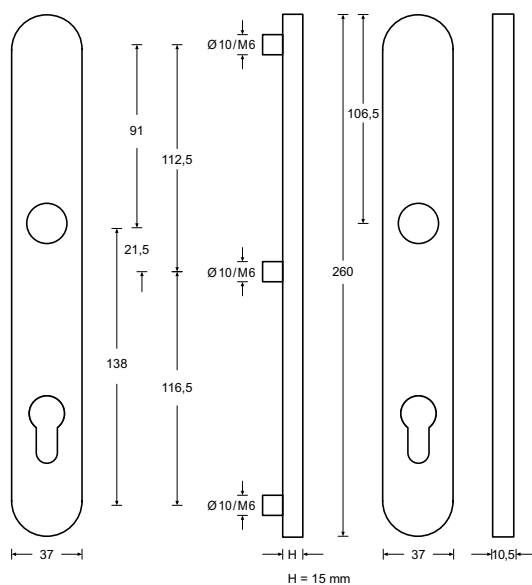

Technical attributes

Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	2
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle, DIN L with spring assist	H 8 3 8 0 2 1 5 2 9 1 0 0 0 0
PC 92 SK2 9mm spindle, DIN R with spring assist	H 8 3 8 0 2 1 5 2 9 2 0 0 0 0
PC 92 SK2 9mm spindle DIN L with spring assist with protective cover	H 8 3 8 0 2 2 5 2 9 1 0 0 0 0
PC 92 SK2 9mm spindle DIN R with spring assist with protective cover	H 8 3 8 0 2 2 5 2 9 2 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

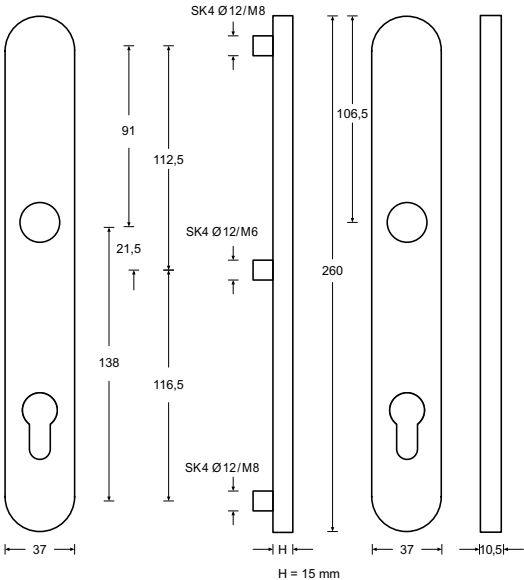


Technical attributes	
Distance	92 mm
Exterior escutcheon	Handle
Protection rating	3
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R with spring assist	H 8 3 8 0 0 1 5 3 9 0 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 8 0 0 2 5 3 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with round knob

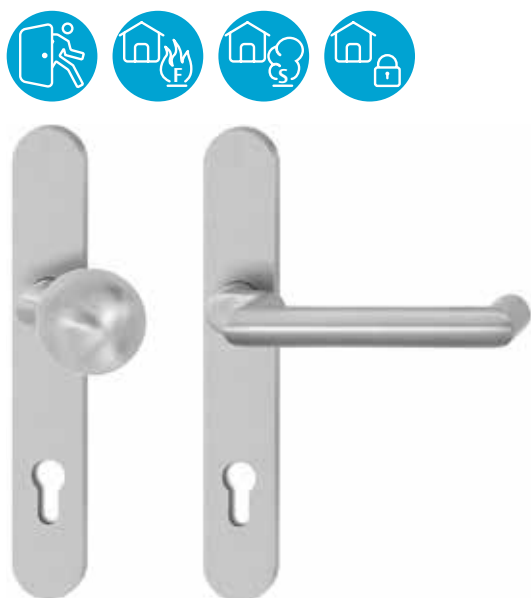

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

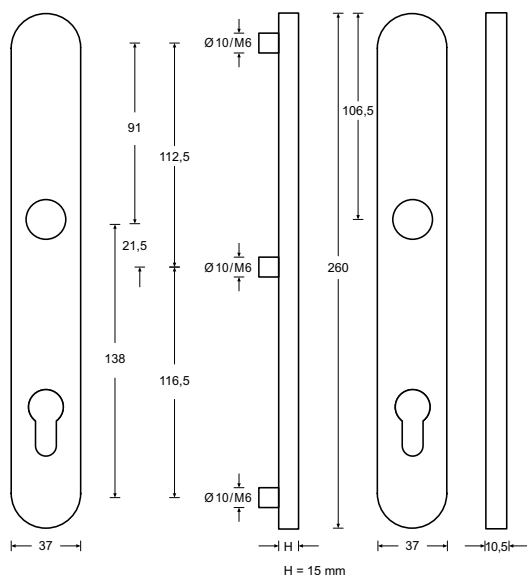

Technical attributes


Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	3
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK3 9 mm spindle, DIN L with spring assist	H 8 3 8 0 1 1 5 3 9 1 0 0 0 0
PC 92 SK3 9 mm spindle, DIN R with spring assist	H 8 3 8 0 1 1 5 3 9 2 0 0 0 0
PC 92 SK3 9mm spindle DIN L with spring assist with protective cover	H 8 3 8 0 1 2 5 3 9 1 0 0 0 0
PC 92 SK3 9 mm spindle DIN R with spring assist with protective cover	H 8 3 8 0 1 2 5 3 9 2 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with flat knob

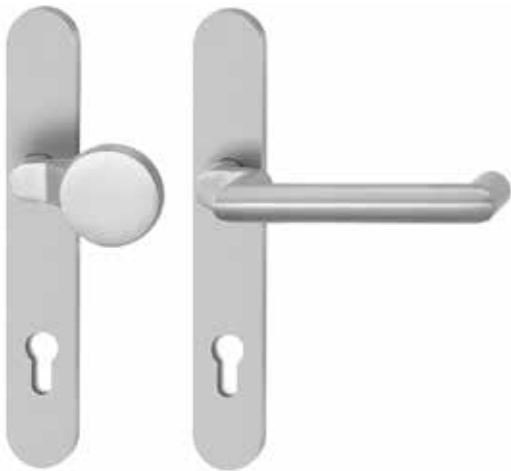

Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

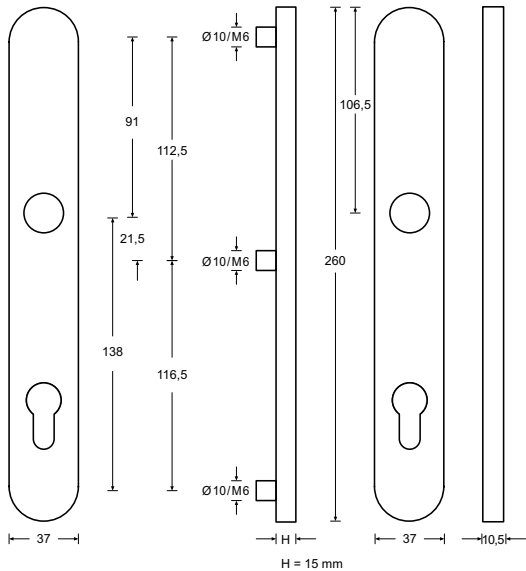

Technical attributes

Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	3
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK3 9mm spindle, DIN L with spring assist	H 8 3 8 0 2 1 5 3 9 1 0 0 0 0
PC 92 SK3 9mm spindle, DIN R with spring assist	H 8 3 8 0 2 1 5 3 9 2 0 0 0 0
PC 92 SK3 9mm spindle DIN L with spring assist with protective cover	H 8 3 8 0 2 2 5 3 9 1 0 0 0 0
PC 92 SK3 9mm spindle DIN R with spring assist with protective cover	H 8 3 8 0 2 2 5 3 9 2 0 0 0 0

Security fittings for narrow style doors on long plate, with KU-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

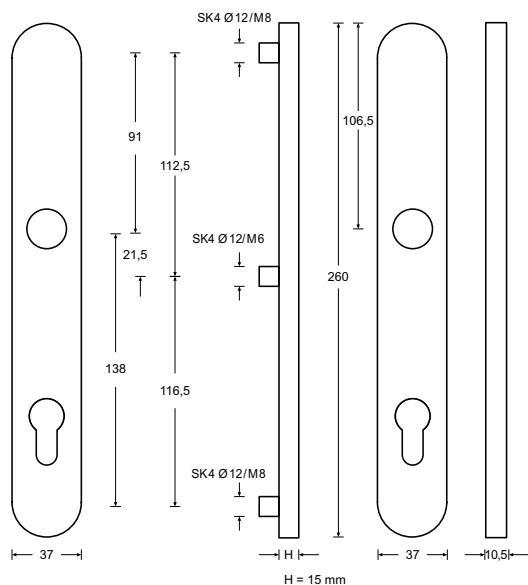

Technical attributes

Distance	92 mm
Exterior escutcheon	Handle
Protection rating	4
Version	With protective cover
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

PC 92 SK4 9mm spindle, DIN L/R without spring assist

Order no.

H 8 3 7 0 0 2 5 4 9 3 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with round knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

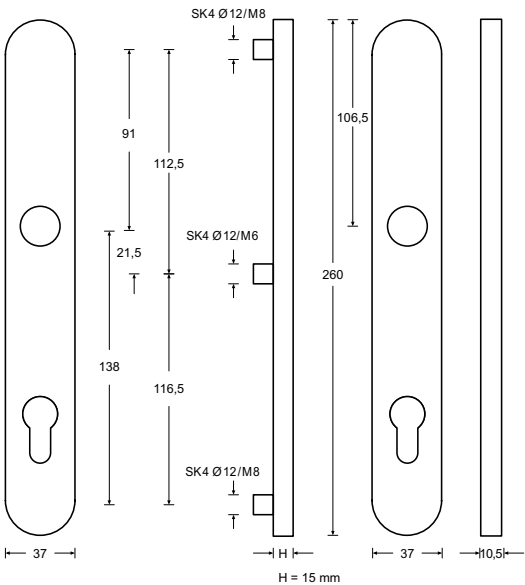

Technical attributes	
Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	4
Version	With protective cover
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK4 9mm spindle, DIN L without spring assist	H 8 3 7 0 1 2 5 4 9 4 0 0 0 0
PC 92 SK4 9mm spindle, DIN R without spring assist	H 8 3 7 0 1 2 5 4 9 5 0 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with flat knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

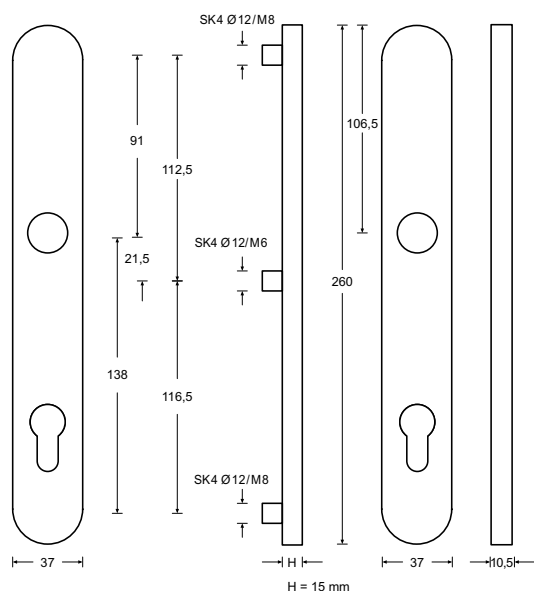

Technical attributes

Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	4
Version	With protective cover
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK4 9mm spindle, DIN L without spring assist	H 8 3 7 0 2 2 5 4 9 4 0 0 0 0
PC 92 SK4 9mm spindle, DIN R without spring assist	H 8 3 7 0 2 2 5 4 9 5 0 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

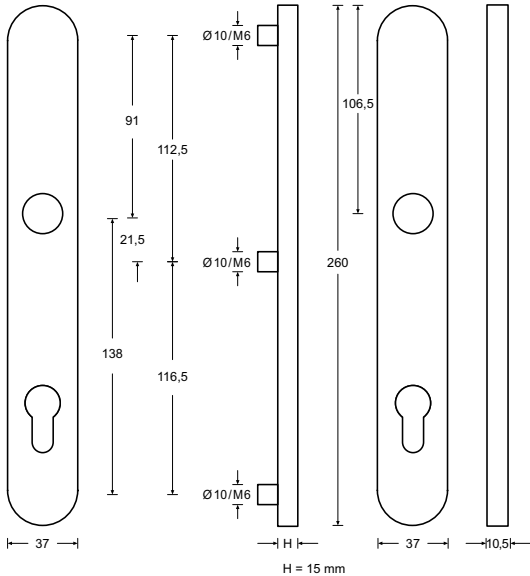

Technical attributes	
Distance	92 mm
Exterior escutcheon	Handle
Protection rating	3
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK3 9mm spindle DIN L/R with spring assist	H 8 3 7 0 0 1 5 3 9 0 0 0 0 0
PC 92 SK3 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 7 0 0 2 5 3 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with round knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

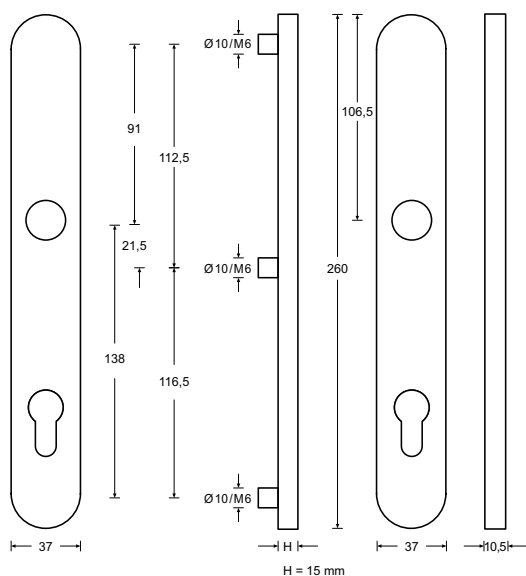

Technical attributes

Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	3
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK 3 9mm spindle, DIN L with spring assist	H 8 3 7 0 1 1 5 3 9 1 0 0 0 0
PC 92 SK 3 9mm spindle, DIN R with spring assist	H 8 3 7 0 1 1 5 3 9 2 0 0 0 0
PC 92 SK 3 9mm spindle DIN L with spring assist with protective cover	H 8 3 7 0 1 2 5 3 9 1 0 0 0 0
PC 92 SK 3 9mm spindle DIN R with spring assist with protective cover	H 8 3 7 0 1 2 5 3 9 2 0 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with flat knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 3 according to DIN 1906

Suitable mounting set

- Mounting set 11c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

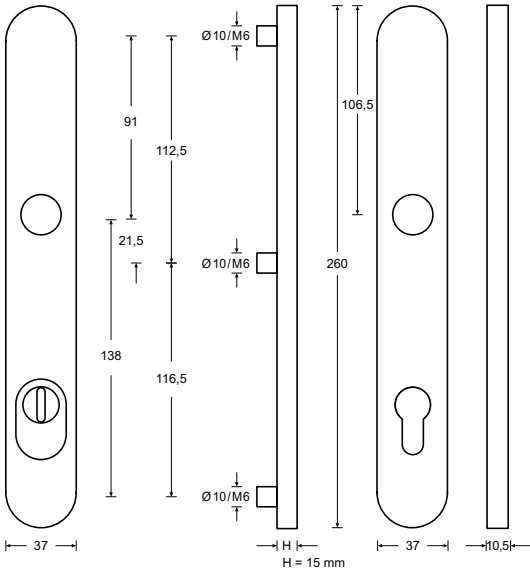

Technical attributes	
Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	3
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK3 9 mm spindle, DIN L with spring assist	H 8 3 7 0 2 1 5 3 9 1 0 0 0 0
PC 92 SK3 9mm spindle, DIN R with spring assist	H 8 3 7 0 2 1 5 3 9 2 0 0 0 0
PC 92 SK3 9mm spindle DIN L with spring assist with protective cover	H 8 3 7 0 2 2 5 3 9 1 0 0 0 0
PC 92 SK3 9mm spindle DIN R with spring assist with protective cover	H 8 3 7 0 2 2 5 3 9 2 0 0 0 0

Security fittings for narrow style doors on long plate, with KU-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

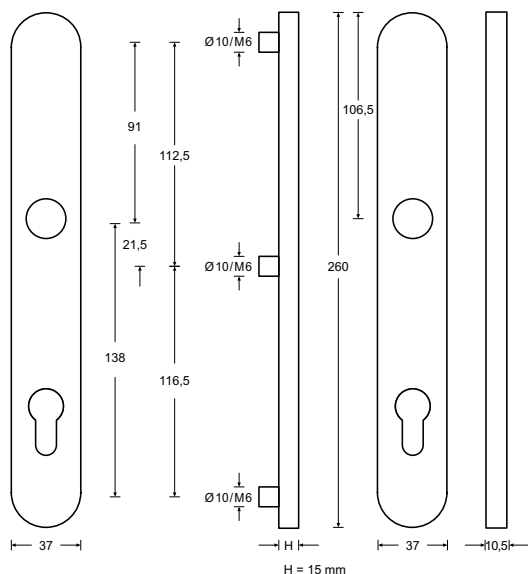

Technical attributes

Distance	92 mm
Exterior escutcheon	Handle
Protection rating	2
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle DIN L/R with spring assist	H 8 3 7 0 0 1 5 2 9 0 0 0 0 0
PC 92 SK2 9mm spindle DIN L/R with spring assist with protective cover	H 8 3 7 0 0 2 5 2 9 0 0 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with flat knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

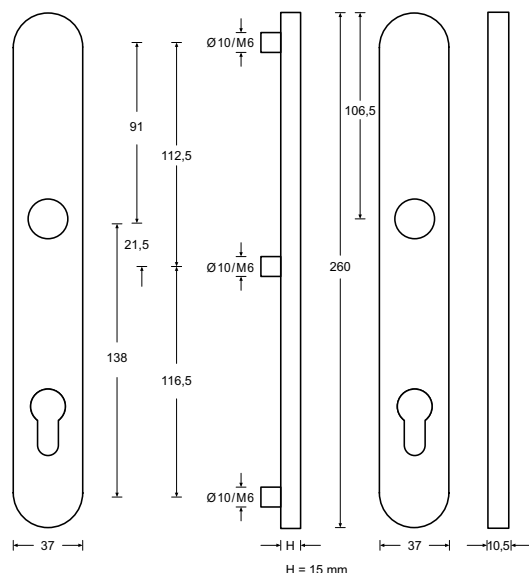

Technical attributes

Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	2
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle, DIN L with spring assist	H 8 3 7 0 2 1 5 2 9 1 0 0 0 0
PC 92 SK2 9mm spindle, DIN R with spring assist	H 8 3 7 0 2 1 5 2 9 2 0 0 0 0
PC 92 SK2 9mm spindle DIN L with spring assist with protective cover	H 8 3 7 0 2 2 5 2 9 1 0 0 0 0
PC 92 SK2 9mm spindle DIN R with spring assist with protective cover	H 8 3 7 0 2 2 5 2 9 2 0 0 0 0

Security fittings for narrow style doors

on long plate, with KU-shaped handle, with round knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KU-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Classic curved handle
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protection class SK 2 according to DIN 1906

Suitable mounting set

- Mounting set 10c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

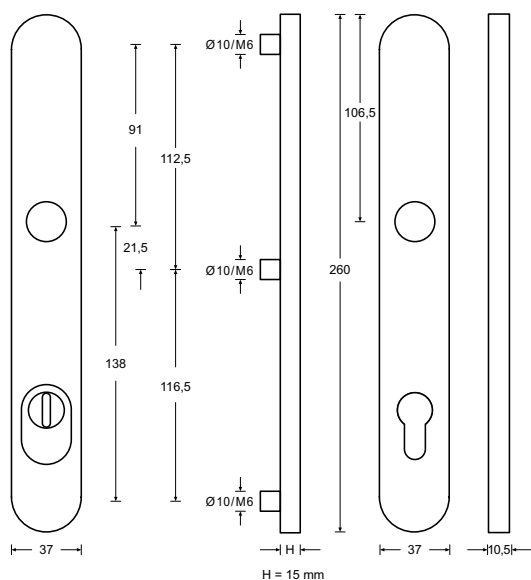

Technical attributes

Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	2
Version	With protective cover
Handle	KU-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK2 9mm spindle DIN L with spring assist with protective cover	H 8 3 7 0 1 2 5 2 9 1 0 0 0 0
PC 92 SK2 9mm spindle DIN R with spring assist with protective cover	H 8 3 7 0 1 2 5 2 9 2 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with outside handle



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with an outside handle.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12b in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

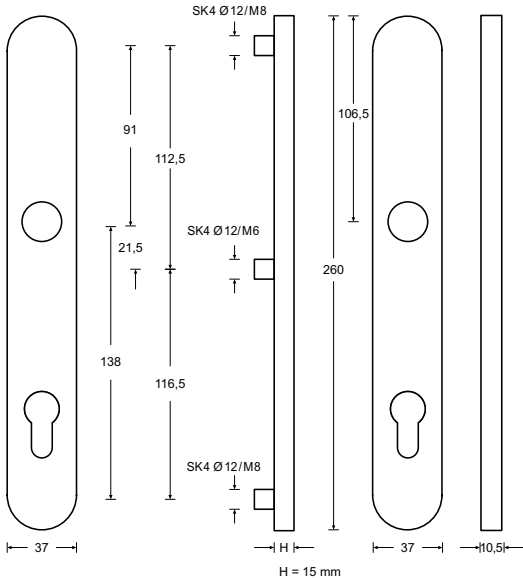

Technical attributes	
Distance	92 mm
Exterior escutcheon	Handle
Protection rating	4
Version	With protective cover
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK4 9mm spindle, DIN L/R without spring assist	H 8 3 8 0 0 2 5 4 9 3 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with round knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a round knob.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12c in the chapter „Accessories“

Notice

- Compatible with locks of series N16**, 319N, 819N und 519N

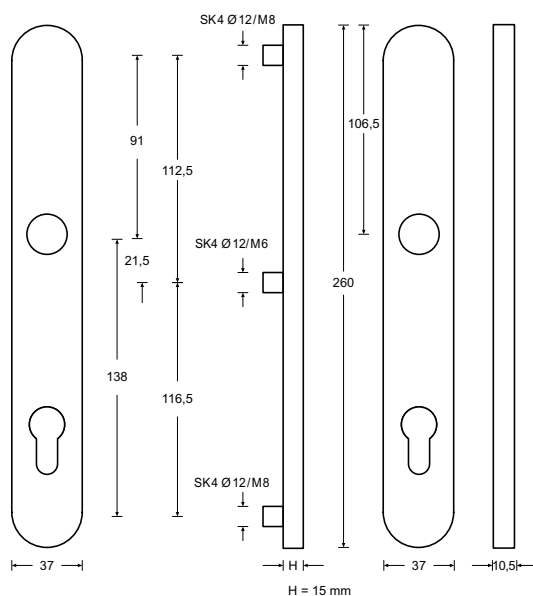

Technical attributes

Distance	92 mm
Exterior escutcheon	Round knob
Protection rating	4
Version	With protective cover
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature

Article / Feature	Order no.
PC 92 SK4 9mm spindle, DIN L without spring assist	H 8 3 8 0 1 2 5 4 9 4 0 0 0 0
PC 92 SK4 9mm spindle, DIN R without spring assist	H 8 3 8 0 1 2 5 4 9 5 0 0 0 0

Security fittings for narrow style doors

on long plate, with KC-shaped handle, with flat knob



Security fitting for narrow style doors

The security fitting for narrow style doors meets requirements for fire and smoke protection hardware in accordance with DIN 18273 and with escape door function in accordance with EN 179, as well as requirements for burglary protection. The high-quality KC-shaped handle on long plate blends elegantly into any building. Durable brushed stainless steel as a modern and corrosion-resistant material is perfect for any environment where quality matters. This model is supplied with a flat knob.

The advantages at a glance


- Freely configurable to your door thickness
- Elegant bevel handle, offset
- Meets requirements for fire and smoke protection hardware in accordance with DIN 18273
- Suitable for use on escape doors in accordance with EN 179
- Security fitting with burglary-resistant effect in accordance with DIN 1906
- Protective cover for increased safety

Suitable mounting set

- Mounting set 12c in the chapter „Accessories“

Notice


- Compatible with locks of series N16**, 319N, 819N und 519N

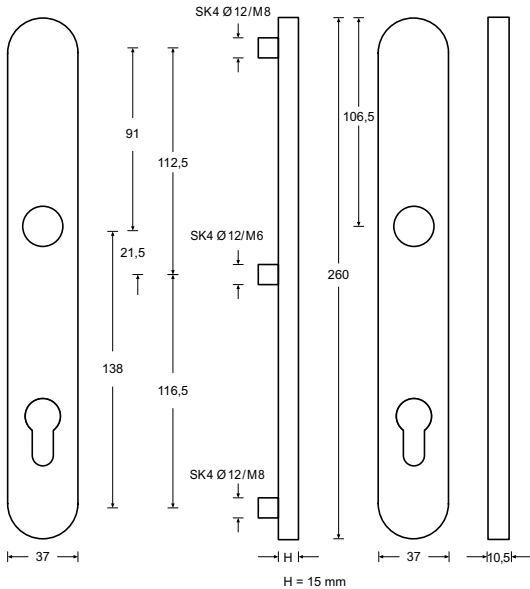

Technical attributes	
Distance	92 mm
Exterior escutcheon	Flat knob
Protection rating	4
Version	With protective cover
Handle	KC-shaped
Handle spindle	9 mm
Material	Standard, brushed stainless steel
Mounting	Long plate

Article / Feature	Order no.
PC 92 SK4 9mm spindle, DIN L without spring assist	H 8 3 8 0 2 2 5 4 9 4 0 0 0 0
PC 92 SK4 9mm spindle, DIN R without spring assist	H 8 3 8 0 2 2 5 4 9 5 0 0 0 0

To order the accessories and spindles, information about the door leaf thickness or the dimensions XF and XP is required.

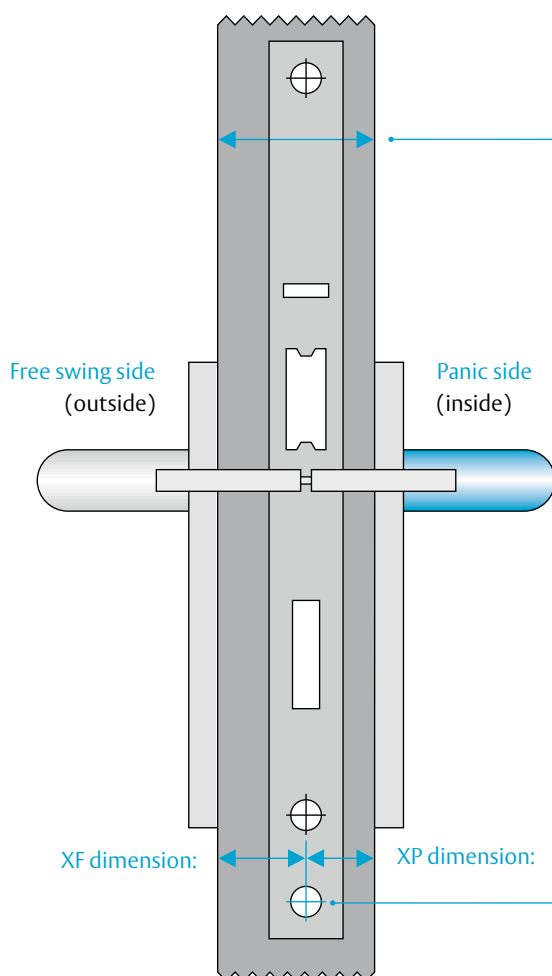

Door thickness

Required to order the appropriate accessory kit.

XF and XP dimensions

Locks with a split follower (door handle inside and outside) have different functions. For this reason, two-part handle pins are required for these locks.

Notes for ordering

If the lock is installed heavily asymmetrically, panic pin halves may be necessary depending on the installation situation, which must be ordered in addition to the mounting material.

Please refer to the draft for the dimensions XF/XP for the handle pin lengths on the free swing and panic side.

The measuring point is the centre of the fixing screw of the profile cylinder.

The pin length of a half pin results from the XF dimension or the XP dimension plus 25 mm.

Accessories for fittings

Fittings

Mounting sets

Mounting set 1a

Mounting set round rose 8mm standard spindle



Technical attributes	
Handle spindle	8 mm
Screw size	4x M4
Spindle type	Spindle

Article / Feature	Order no.
with spindle 8 mm for door leaf thickness 37-50 mm	HA 11 S 00000084000
with spindle 8 mm for door leaf thickness 51-60 mm	HA 11 S 00000085000
with spindle 8 mm for door leaf thickness 61-70 mm	HA 11 S 00000086000
with spindle 8 mm for door leaf thickness 71-80 mm	HA 11 S 00000087000
with spindle 8 mm for door leaf thickness 81-90 mm	HA 11 S 00000088000
with spindle 8 mm for door leaf thickness 91-100 mm	HA 11 S 00000089000

Mounting set 1c

Mounting set round rose 8mm half spindle



Technical attributes	
Handle spindle	8 mm
Screw size	4x M4
Spindle type	Half spindle

Article / Feature	Order no.
with spindle 8 mm for door leaf thickness 37-50 mm	HA 21 S 00000090000
with spindle 8 mm for door leaf thickness 51-60 mm	HA 21 S 00000091000
with spindle 8 mm for door leaf thickness 61-70 mm	HA 21 S 00000092000
with spindle 8 mm for door leaf thickness 71-80 mm	HA 21 S 00000093000
with spindle 8 mm for door leaf thickness 81-90 mm	HA 21 S 00000094000
with spindle 8 mm for door leaf thickness 91-100 mm	HA 21 S 00000095000

Fittings

Mounting sets

Mounting set 2a

Mounting set wide style long plate 8mm standard spindle



Technical attributes

Handle spindle	8 mm
Screw size	3x M5
Spindle type	Spindle

Article / Feature

Article / Feature	Order no.
with spindle 8 mm for door leaf thickness 36-49 mm	H A 1 1 S 0 0 0 0 0 0 1 0 0 0
with spindle 8 mm for door leaf thickness 50-59 mm	H A 1 1 S 0 0 0 0 0 0 2 0 0 0
with spindle 8 mm for door leaf thickness 60-69 mm	H A 1 1 S 0 0 0 0 0 0 3 0 0 0
with spindle 8 mm for door leaf thickness 70-79 mm	H A 1 1 S 0 0 0 0 0 0 4 0 0 0
with spindle 8 mm for door leaf thickness 80-89 mm	H A 1 1 S 0 0 0 0 0 0 5 0 0 0
with spindle 8 mm for door leaf thickness 90-99 mm	H A 1 1 S 0 0 0 0 0 0 6 0 0 0

Mounting set 2c

Mounting set wide style long plate 8mm half spindle



Technical attributes

Handle spindle	8 mm
Screw size	3x M5
Spindle type	Half spindle

Article / Feature

Article / Feature	Order no.
with spindle 8 mm for door leaf thickness 36-49 mm	H A 2 1 S 0 0 0 0 0 0 1 3 0 0 0
with spindle 8 mm for door leaf thickness 50-59 mm	H A 2 1 S 0 0 0 0 0 0 1 4 0 0 0
with spindle 8 mm for door leaf thickness 60-69 mm	H A 2 1 S 0 0 0 0 0 0 1 5 0 0 0
with spindle 8 mm for door leaf thickness 70-79 mm	H A 2 1 S 0 0 0 0 0 0 1 6 0 0 0
with spindle 8 mm for door leaf thickness 80-89 mm	H A 2 1 S 0 0 0 0 0 0 1 7 0 0 0
with spindle 8 mm for door leaf thickness 90-99 mm	H A 2 1 S 0 0 0 0 0 0 1 8 0 0 0

Fittings

Mounting sets

Mounting set 3a

Mounting set wide style long plate 8mm standard spindle SK2



Technical attributes

Handle spindle	8 mm
Screw size	3xM6
Spindle type	Spindle

Article / Feature

Article / Feature	Order no.
protection rating 2 with spindle 8 mm for door leaf thickness 35-44 mm	HA 3150000019000
protection rating 2 with spindle 8 mm for door leaf thickness 45-54 mm	HA 3150000020000
protection rating 2 with spindle 8 mm for door leaf thickness 55-64 mm	HA 3150000021000
protection rating 2 with spindle 8 mm for door leaf thickness 65-74 mm	HA 3150000022000
protection rating 2 with spindle 8 mm for door leaf thickness 75-84 mm	HA 3150000023000
protection rating 2 with spindle 8 mm for door leaf thickness 85-94 mm	HA 3150000024000
Protection rating 2 with panic spindle for door thickness 95-104 mm	HA 3150000024100

Mounting set 3c

Mounting set wide style long plate 8mm half spindle SK2



Technical attributes

Handle spindle	8 mm
Screw size	3xM6
Spindle type	Half spindle

Article / Feature

Article / Feature	Order no.
protection rating 2 with spindle 8 mm for door leaf thickness 35-44 mm	HA 4150000025000
protection rating 2 with spindle 8 mm for door leaf thickness 45-54 mm	HA 4150000026000
protection rating 2 with spindle 8 mm for door leaf thickness 55-64 mm	HA 4150000027000
protection rating 2 with spindle 8 mm for door leaf thickness 65-74 mm	HA 4150000028000
protection rating 2 with spindle 8 mm for door leaf thickness 75-84 mm	HA 4150000029000
protection rating 2 with spindle 8 mm for door leaf thickness 85-94 mm	HA 4150000030000
protection rating 2 with spindle 8 mm for door leaf thickness 95-104 mm	HA 4150000030100

Fittings

Mounting sets

Mounting set 4a

Mounting set round rose 9mm standard spindle



Technical attributes	
Handle spindle	9 mm
Screw size	4x M4
Spindle type	Spindle

Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 37-50 mm	H A 4 2 S 0 0 0 0 1 5 8 0 0 0
with spindle 9 mm for door leaf thickness 51-60 mm	H A 4 2 S 0 0 0 0 1 5 9 0 0 0
with spindle 9 mm for door leaf thickness 61-70 mm	H A 4 2 S 0 0 0 0 1 6 0 0 0 0
with spindle 9 mm for door leaf thickness 71-80 mm	H A 4 2 S 0 0 0 0 1 6 1 0 0 0
with spindle 9 mm for door leaf thickness 81-90 mm	H A 4 2 S 0 0 0 0 1 6 2 0 0 0
with spindle 9 mm for door leaf thickness 91-100 mm	H A 4 2 S 0 0 0 0 1 6 3 0 0 0

Mounting set 4b

Mounting set round rose 9mm panic spindle



Technical attributes	
Handle spindle	9 mm
Spindle	Central split
Screw size	4x M4
Spindle type	Panic spindle

Article / Feature	Order no.
with panic spindle for door leaf thickness 37-50 mm	H A 1 2 S 0 0 0 0 1 7 6 0 0 0
with panic spindle for door leaf thickness 51-60 mm	H A 1 2 S 0 0 0 0 1 7 7 0 0 0
with panic spindle for door leaf thickness 61-70 mm	H A 1 2 S 0 0 0 0 1 7 8 0 0 0
with panic spindle for door leaf thickness 71-80 mm	H A 1 2 S 0 0 0 0 1 7 9 0 0 0
with panic spindle for door leaf thickness 81-90 mm	H A 1 2 S 0 0 0 0 1 8 0 0 0 0
with panic spindle for door leaf thickness 91-100 mm	H A 1 2 S 0 0 0 0 1 8 1 0 0 0

Mounting set 4c

Mounting set round rose 9mm half spindle



Technical attributes	
Handle spindle	9 mm
Screw size	4x M4
Spindle type	Half spindle

Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 37-50 mm	H A 4 2 S 0 0 0 0 1 7 0 0 0 0
with spindle 9 mm for door leaf thickness 51-60 mm	H A 4 2 S 0 0 0 0 1 7 1 0 0 0
with spindle 9 mm for door leaf thickness 61-70 mm	H A 4 2 S 0 0 0 0 1 7 2 0 0 0
with spindle 9 mm for door leaf thickness 71-80 mm	H A 4 2 S 0 0 0 0 1 7 3 0 0 0
with spindle 9 mm for door leaf thickness 81-90 mm	H A 4 2 S 0 0 0 0 1 7 4 0 0 0
with spindle 9 mm for door leaf thickness 91-100 mm	H A 4 2 S 0 0 0 0 1 7 5 0 0 0

Fittings

Mounting sets

Mounting set 5a

Mounting set short plate 9mm standard spindle



Technical attributes

Handle spindle	9 mm
Screw size	2x M4
Spindle type	Spindle

Article / Feature

Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 37-50 mm	HA 11 S 0000096000
with spindle 9 mm for door leaf thickness 51-60 mm	HA 11 S 0000097000
with spindle 9 mm for door leaf thickness 61-70 mm	HA 11 S 0000098000
with spindle 9 mm for door leaf thickness 71-80 mm	HA 11 S 0000099000
with spindle 9 mm for door leaf thickness 81-90 mm	HA 11 S 0000100000
with spindle 9 mm for door leaf thickness 91-100 mm	HA 11 S 0000101000

Mounting set 5b

Mounting set short plate 9mm panic spindle



Technical attributes

Handle spindle	9 mm
Spindle	Central split
Screw size	2x M4
Spindle type	Panic spindle

Article / Feature

Article / Feature	Order no.
with panic spindle for door leaf thickness 37-50 mm	HA 21 S 0000102000
with panic spindle for door leaf thickness 51-60 mm	HA 21 S 0000103000
with panic spindle for door leaf thickness 61-70 mm	HA 21 S 0000104000
with panic spindle for door leaf thickness 71-80 mm	HA 21 S 0000105000
with panic spindle for door leaf thickness 81-90 mm	HA 21 S 0000106000
with panic spindle for door leaf thickness 91-100 mm	HA 21 S 0000107000

Mounting set 5c

Mounting set short plate 9mm half spindle



Technical attributes

Handle spindle	9 mm
Screw size	2x M4
Spindle type	Half spindle

Article / Feature

Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 37-50 mm	HA 22 S 0000182000
with spindle 9 mm for door leaf thickness 51-60 mm	HA 22 S 0000183000
with spindle 9 mm for door leaf thickness 61-70 mm	HA 22 S 0000184000
with spindle 9 mm for door leaf thickness 71-80 mm	HA 22 S 0000185000
with spindle 9 mm for door leaf thickness 81-90 mm	HA 22 S 0000186000
with spindle 9 mm for door leaf thickness 91-100 mm	HA 22 S 0000187000

Fittings

Mounting sets

Mounting set 6a

Mounting set wide style long plate 9mm standard spindle



Technical attributes

Handle spindle	9 mm
Screw size	3x M5
Spindle type	Spindle

Article / Feature

Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 36-49 mm	H A 1 2 S 0 0 0 0 1 2 8 0 0 0
with spindle 9 mm for door leaf thickness 50-59 mm	H A 1 2 S 0 0 0 0 1 2 9 0 0 0
with spindle 9 mm for door leaf thickness 60-69 mm	H A 1 2 S 0 0 0 0 1 3 0 0 0 0
with spindle 9 mm for door leaf thickness 70-79 mm	H A 1 2 S 0 0 0 0 1 3 1 0 0 0
with spindle 9 mm for door leaf thickness 80-89 mm	H A 1 2 S 0 0 0 0 1 3 2 0 0 0
with spindle 9 mm for door leaf thickness 90-99 mm	H A 1 2 S 0 0 0 0 1 3 3 0 0 0

Mounting set 6b

Mounting set wide style long plate 9mm panic spindle



Technical attributes

Handle spindle	9 mm
Screw size	3x M5
Spindle type	Panic spindle

Article / Feature

Article / Feature	Order no.
with 9 mm panic spindle for door leaf thickness 36-49 mm	H A 1 2 S 0 0 0 0 1 2 2 0 0 0
with 9 mm panic spindle for door leaf thickness 50-59 mm	H A 1 2 S 0 0 0 0 1 2 3 0 0 0
with 9 mm panic spindle for door leaf thickness 60-69 mm	H A 1 2 S 0 0 0 0 1 2 4 0 0 0
with 9 mm panic spindle for door leaf thickness 70-79 mm	H A 1 2 S 0 0 0 0 1 2 5 0 0 0
with 9 mm panic spindle for door leaf thickness 80-89 mm	H A 1 2 S 0 0 0 0 1 2 6 0 0 0
with 9 mm panic spindle for door leaf thickness 90-99 mm	H A 1 2 S 0 0 0 0 1 2 7 0 0 0

Mounting set 6c

Mounting set wide style long plate 9mm half spindle



Technical attributes

Handle spindle	9 mm
Screw size	3xM5
Spindle type	Half spindle

Article / Feature

Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 36-49 mm	H A 2 2 S 0 0 0 0 1 1 6 0 0 0
with spindle 9 mm for door leaf thickness 50-59 mm	H A 2 2 S 0 0 0 0 1 1 7 0 0 0
with spindle 9 mm for door leaf thickness 60-69 mm	H A 2 2 S 0 0 0 0 1 1 8 0 0 0
with spindle 9 mm for door leaf thickness 70-79 mm	H A 2 2 S 0 0 0 0 1 1 9 0 0 0
with spindle 9 mm for door leaf thickness 80-89 mm	H A 2 2 S 0 0 0 0 1 2 0 0 0 0
with spindle 9 mm for door leaf thickness 90-99 mm	H A 2 2 S 0 0 0 0 1 2 1 0 0 0

Fittings

Mounting sets

Mounting set 7b

Mounting set wide style long plate 9mm panic spindle SK3

Technical attributes	
Handle spindle	9 mm
Screw size	3x M6
Spindle type	Panic spindle



Article / Feature	Order no.
protection rating 3 with panic spindle for door leaf thickness 33-37 mm	HA32S0000140000
protection rating 3 with panic spindle for door leaf thickness 38-42 mm	HA32S0000141000
protection rating 3 with panic spindle for door leaf thickness 43-47 mm	HA32S0000142000
protection rating 3 with panic spindle for door leaf thickness 48-52 mm	HA32S0000143000
protection rating 3 with panic spindle for door leaf thickness 53-57 mm	HA32S0000144000
protection rating 3 with panic spindle for door leaf thickness 58-62 mm	HA32S0000145000
protection rating 3 with panic spindle for door leaf thickness 63-67 mm	HA31S0000267000
protection rating 3 with panic spindle for door leaf thickness 68-72 mm	HA31S0000268000
protection rating 3 with panic spindle for door leaf thickness 73-77 mm	HA31S0000269000
protection rating 3 with panic spindle for door leaf thickness 78-82 mm	HA31S0000270000
protection rating 3 with panic spindle for door thickness 83-87 mm	HA31S0000270100
protection rating 3 with panic spindle for door thickness 88-92 mm	HA31S0000270200
protection rating 3 with panic spindle for door thickness 93-97 mm	HA31S0000270300
protection rating 3 with panic spindle for door leaf thickness 98-102 mm	HA31S0000270400

Fittings

Mounting sets

Mounting set 7c

Mounting set wide style long plate 9mm half spindle SK3

Technical attributes	
Handle spindle	9 mm
Screw size	3xM6
Spindle type	Half spindle



Article / Feature	Order no.
protection rating 3 with spindle 9 mm for door leaf thickness 35-39 mm	HA42S0000042000
protection rating 3 with spindle 9 mm for door leaf thickness 40-44 mm	HA42S0000043000
protection rating 3 with spindle 9 mm for door leaf thickness 45-49 mm	HA42S0000044000
protection rating 3 with spindle 9 mm for door leaf thickness 50-54 mm	HA42S0000045000
protection rating 3 with spindle 9 mm for door leaf thickness 55-59 mm	HA42S0000046000
protection rating 3 with spindle 9 mm for door leaf thickness 60-64 mm	HA42S0000047000
protection rating 3 with spindle 9 mm for door leaf thickness 65-69 mm	HA42S0000048000
protection rating 3 with spindle 9 mm for door leaf thickness 70-74 mm	HA42S0000049000
protection rating 3 with spindle 9 mm for door leaf thickness 75-79 mm	HA42S0000050000
protection rating 3 with spindle 9 mm for door leaf thickness 80-84 mm	HA42S0000051000
protection rating 3 with spindle 9 mm for door leaf thickness 85-89 mm	HA42S0000052000
protection rating 3 with spindle 9 mm for door leaf thickness 90-94 mm	HA42S0000053000
protection rating 3 with spindle 9 mm for door leaf thickness 95-99 mm	HA42S0000054000
protection rating 3 with spindle 9 mm for door leaf thickness 100-104 mm	HA42S0000055000
protection rating 3 with spindle 9 mm for door leaf thickness 105-109 mm	HA42S0000056000
protection rating 3 with spindle 9 mm for door leaf thickness 110-114 mm	HA42S0000057000
protection rating 3 with spindle 9 mm for door leaf thickness 115-119 mm	HA42S0000058000
protection rating 3 with spindle 9 mm for door leaf thickness 120-124 mm	HA42S0000059000
protection rating 3 with spindle 9 mm for door leaf thickness 125-129 mm	HA42S0000060000
protection rating 3 with spindle 9 mm for door leaf thickness 130-134 mm	HA42S0000061000

Fittings

Mounting sets

Mounting set 8a

Mounting set wide style long plate 9mm standard spindle SK4

Technical attributes	
Handle spindle	9 mm
Screw size	2xM8 1xM6
Spindle type	Spindle



Article / Feature	Order no.
protection rating 4 with spindle 9 mm for door leaf thickness 37-41 mm	HA31S0000062000
protection rating 4 with spindle 9 mm for door leaf thickness 42-46 mm	HA31S0000063000
protection rating 4 with spindle 9 mm for door leaf thickness 47-51 mm	HA31S0000064000
protection rating 4 with spindle 9 mm for door leaf thickness 52-56 mm	HA31S0000065000
protection rating 4 with spindle 9 mm for door leaf thickness 57-61 mm	HA31S0000066000
protection rating 4 with spindle 9 mm for door leaf thickness 62-66 mm	HA31S0000067000
protection rating 4 with spindle 9 mm for door leaf thickness 67-71 mm	HA31S0000068000
protection rating 4 with spindle 9 mm for door leaf thickness 72-76 mm	HA31S0000069000
protection rating 4 with spindle 9 mm for door leaf thickness 77-81 mm	HA31S0000070000
protection rating 4 with spindle 9 mm for door leaf thickness 82-86 mm	HA31S0000071000
protection rating 4 with spindle 9 mm for door leaf thickness 87-91 mm	HA31S0000072000

Mounting set 8b

Mounting set wide style long plate 9mm panic spindle SK4

Technical attributes	
Handle spindle	9 mm
Screw size	2x M8 1x M6
Spindle type	Panic spindle



Article / Feature	Order no.
protection rating 4 with panic spindle for door leaf thickness 36-40 mm	HA32S0000164000
protection rating 4 with panic spindle for door leaf thickness 41-45 mm	HA32S0000165000
protection rating 4 with panic spindle for door leaf thickness 46-50 mm	HA32S0000166000
protection rating 4 with panic spindle for door leaf thickness 51-55 mm	HA32S0000167000
protection rating 4 with panic spindle for door leaf thickness 56-60 mm	HA32S0000168000
protection rating 4 with panic spindle for door leaf thickness 61-65 mm	HA32S0000169000
protection rating 4 with panic spindle for door leaf thickness 66-70 mm	HA32S0000169100
protection rating 4 with panic spindle for door leaf thickness 71-75 mm	HA32S0000169200
protection rating 4 with panic spindle for door leaf thickness 76-80 mm	HA32S0000169300
protection rating 4 with panic spindle for door leaf thickness 81-85 mm	HA32S0000169400
protection rating 4 with panic spindle for door leaf thickness 86-90 mm	HA32S0000169500
protection rating 4 with panic spindle for door leaf thickness 91-95 mm	HA32S0000169600
protection rating 4 with panic spindle for door leaf thickness 96-100 mm	HA32S0000169700

Fittings

Mounting sets

Mounting set 8c

Mounting set wide style long plate 9mm half spindle SK4

Technical attributes	
Handle spindle	9 mm
Screw size	2xM8 1xM6
Spindle type	Half spindle



Article / Feature	Order no.
protection rating 4 with spindle 9 mm for door leaf thickness 37-41 mm	HA42S0000073000
protection rating 4 with spindle 9 mm for door leaf thickness 42-46 mm	HA42S0000074000
protection rating 4 with spindle 9 mm for door leaf thickness 47-51 mm	HA42S0000075000
protection rating 4 with spindle 9 mm for door leaf thickness 52-56 mm	HA42S0000076000
protection rating 4 with spindle 9 mm for door leaf thickness 57-61 mm	HA42S0000077000
protection rating 4 with spindle 9 mm for door leaf thickness 62-66 mm	HA42S0000078000
protection rating 4 with spindle 9 mm for door leaf thickness 67-71 mm	HA42S0000079000
protection rating 4 with spindle 9 mm for door leaf thickness 72-76 mm	HA42S0000080000
protection rating 4 with spindle 9 mm for door leaf thickness 77-81 mm	HA42S0000081000
protection rating 4 with spindle 9 mm for door leaf thickness 82-86 mm	HA42S0000082000
protection rating 4 with spindle 9 mm for door leaf thickness 87-91 mm	HA42S0000083000
protection rating 4 with spindle 9 mm for door leaf thickness 92-96 mm	HA42S0000083100
protection rating 4 with spindle 9 mm for door leaf thickness 97-101 mm	HA42S0000083200

Fittings

Mounting sets

Mounting set 9a

Mounting set oval rose 9mm standard spindle



Technical attributes

Handle spindle	9 mm
Screw length	25 mm
Screw size	4x M5
Spindle type	Spindle

Article / Feature

Article / Feature	Order no.
metal construction with spindle 9 mm for door leaf thickness 30-49 mm	HA12S00001108000
metal construction with spindle 9 mm for door leaf thickness 50-69 mm	HA12S00001109000
metal construction with spindle 9 mm for door leaf thickness 70-89 mm	HA12S00001110000
metal construction with spindle 9 mm for door leaf thickness 90-109 mm	HA12S00001111000

Mounting set 9b

Mounting set oval rose 9mm panic spindle



Technical attributes

Handle spindle	9 mm
Screw length	25 mm
Spindle	Central split
Screw size	4x M5
Spindle type	Panic spindle

Article / Feature

Article / Feature	Order no.
metal construction with panic spindle for door leaf thickness 30-49 mm	HA12S00001188000
metal construction with panic spindle for door leaf thickness 50-69 mm	HA12S00001189000
metal construction with panic spindle for door leaf thickness 70-89 mm	HA12S00001190000
metal construction with panic spindle for door leaf thickness 90-109 mm	HA12S00001191000

Mounting set 9c

Mounting set oval rose 9mm half spindle



Technical attributes

Handle spindle	9 mm
Screw length	25 mm
Screw size	4x M5
Spindle type	Half spindle

Article / Feature

Article / Feature	Order no.
metal construction with spindle 9 mm for door leaf thickness 30-45 mm	HA22S00001112000
metal construction with spindle 9 mm for door leaf thickness 46-65 mm	HA22S00001113000
metal construction with spindle 9 mm for door leaf thickness 66-85 mm	HA22S00001114000
metal construction with spindle 9 mm for door leaf thickness 86-105 mm	HA22S00001115000

Fittings

Mounting sets

Mounting set 10a

Mounting set narrow style long plate standard spindle

Technical attributes	
Handle spindle	9 mm
Screw size	3xM6
Spindle type	Spindle



Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 35-39 mm	HA31S0000031000
with spindle 9 mm for door leaf thickness 40-44 mm	HA31S0000032000
with spindle 9 mm for door leaf thickness 45-49 mm	HA31S0000033000
with spindle 9 mm for door leaf thickness 50-54 mm	HA31S0000034000
with spindle 9 mm for door leaf thickness 55-59 mm	HA31S0000035000
with spindle 9 mm for door leaf thickness 60-64 mm	HA31S0000036000
with spindle 9 mm for door leaf thickness 65-69 mm	HA31S0000037000
with spindle 9 mm for door leaf thickness 70-74 mm	HA31S0000038000
with spindle 9 mm for door leaf thickness 75-79 mm	HA31S0000039000
with spindle 9 mm for door leaf thickness 80-84 mm	HA31S0000040000
with spindle 9 mm for door leaf thickness 85-89 mm	HA31S0000041000

Mounting set 10b

Mounting set narrow style long plate panic spindle

Technical attributes	
Handle spindle	9 mm
Screw size	3xM6
Spindle type	Panic spindle



Article / Feature	Order no.
with panic spindle for door leaf thickness 33-37 mm	HA32S0000196000
with panic spindle for door leaf thickness 38-42 mm	HA32S0000197000
with panic spindle for door leaf thickness 43-47 mm	HA32S0000198000
with panic spindle for door leaf thickness 48-52 mm	HA32S0000199000
with panic spindle for door leaf thickness 53-57 mm	HA32S0000200000
with panic spindle for door leaf thickness 58-62 mm	HA32S0000201000
with panic spindle for door leaf thickness 63-67 mm	HA32S0000202000
with panic spindle for door leaf thickness 68-72 mm	HA32S0000203000
with panic spindle for door leaf thickness 73-77 mm	HA32S0000204000
with panic spindle for door leaf thickness 78-82 mm	HA32S0000205000
with panic spindle for door leaf thickness 85-89 mm	HA21S0000282000
with panic spindle for door leaf thickness 90-94 mm	HA21S0000283000
with panic spindle for door leaf thickness 95-99 mm	HA21S0000284000

Fittings

Mounting sets

Mounting set 10c

Mounting set narrow style long plate half spindle

Technical attributes	
Handle spindle	9 mm
Screw size	3xM6
Spindle type	Half spindle



Article / Feature	Order no.
with spindle 9 mm for door leaf thickness 35-39 mm	HA32S0000206000
with spindle 9 mm for door leaf thickness 40-44 mm	HA32S0000207000
with spindle 9 mm for door leaf thickness 45-49 mm	HA32S0000208000
with spindle 9 mm for door leaf thickness 50-54 mm	HA32S0000209000
with spindle 9 mm for door leaf thickness 55-59 mm	HA32S0000210000
with spindle 9 mm for door leaf thickness 60-64 mm	HA32S0000211000
with spindle 9 mm for door leaf thickness 65-69 mm	HA32S0000212000
with spindle 9 mm for door leaf thickness 70-74 mm	HA32S0000213000
with spindle 9 mm for door leaf thickness 75-79 mm	HA32S0000214000
with spindle 9 mm for door leaf thickness 80-84 mm	HA32S0000215000
with spindle 9 mm for door thickness 82-86 mm	HA32S0000215100
with spindle 9 mm for door thickness 87-91 mm	HA32S0000215200
with spindle 9 mm for door thickness 92-96 mm	HA32S0000215300

Fittings

Mounting sets

Mounting set 11b

Mounting set narrow style long plate panic spindle SK3

Technical attributes	
Handle spindle	9 mm
Screw size	3xM6
Spindle type	Panic spindle



Article / Feature	Order no.
protection rating 3 with panic spindle for door leaf thickness 35-39 mm	HA 3 2 S 0 0 0 0 2 1 6 0 0 0
protection rating 3 with panic spindle for door leaf thickness 40-44 mm	HA 3 2 S 0 0 0 0 2 1 7 0 0 0
protection rating 3 with panic spindle for door leaf thickness 45-49 mm	HA 3 2 S 0 0 0 0 2 1 8 0 0 0
protection rating 3 with panic spindle for door leaf thickness 50-54 mm	HA 3 2 S 0 0 0 0 2 1 9 0 0 0
protection rating 3 with panic spindle for door leaf thickness 55-59 mm	HA 3 2 S 0 0 0 0 2 2 0 0 0 0
protection rating 3 with panic spindle for door leaf thickness 60-64 mm	HA 3 2 S 0 0 0 0 2 2 1 0 0 0
protection rating 3 with panic spindle for door leaf thickness 65-69 mm	HA 3 2 S 0 0 0 0 2 2 2 0 0 0
protection rating 3 with panic spindle for door leaf thickness 70-74 mm	HA 3 2 S 0 0 0 0 2 2 3 0 0 0
protection rating 3 with panic spindle for door leaf thickness 75-79 mm	HA 3 2 S 0 0 0 0 2 2 4 0 0 0
protection rating 3 with panic spindle for door leaf thickness 80-84 mm	HA 3 2 S 0 0 0 0 2 2 5 0 0 0
Protection rating 3 with panic spindle for door thickness 82-86 mm	HA 3 2 S 0 0 0 0 2 2 5 1 0 0
Protection rating 3 with panic spindle for door thickness 87-91 mm	HA 3 2 S 0 0 0 0 2 2 5 2 0 0
Protection rating 3 with panic spindle for door thickness 92-96 mm	HA 3 2 S 0 0 0 0 2 2 5 3 0 0

Mounting set 11c

Mounting set narrow style long plate half spindle SK3

Technical attributes	
Handle spindle	9 mm
Screw size	3xM6
Spindle type	Half spindle



Article / Feature	Order no.
protection rating 3 with spindle 9 mm for door leaf thickness 35-39 mm	HA 3 2 S 0 0 0 0 2 2 6 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 40-44 mm	HA 3 2 S 0 0 0 0 2 2 7 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 45-49 mm	HA 3 2 S 0 0 0 0 2 2 8 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 50-54 mm	HA 3 2 S 0 0 0 0 2 2 9 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 55-59 mm	HA 3 2 S 0 0 0 0 2 3 0 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 60-64 mm	HA 3 2 S 0 0 0 0 2 3 1 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 65-69 mm	HA 3 2 S 0 0 0 0 2 3 2 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 70-74 mm	HA 3 2 S 0 0 0 0 2 3 3 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 75-79 mm	HA 3 2 S 0 0 0 0 2 3 4 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 80-84 mm	HA 3 2 S 0 0 0 0 2 3 5 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 85-89 mm	HA 3 2 S 0 0 0 0 2 9 1 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 90-94 mm	HA 3 2 S 0 0 0 0 2 9 2 0 0 0
protection rating 3 with spindle 9 mm for door leaf thickness 95-99 mm	HA 3 2 S 0 0 0 0 2 9 3 0 0 0

Fittings

Mounting sets

Mounting set 12b

Mounting set narrow style long plate panic spindle SK4

Technical attributes	
Handle spindle	9 mm
Spindle	Central split
Screw size	2x M8 1x M6
Spindle type	Panic spindle



Article / Feature	Order no.
protection rating 4 with panic spindle for door leaf thickness 37-41 mm	HA42S0000400000
protection rating 4 with panic spindle for door leaf thickness 42-46 mm	HA42S0000401000
protection rating 4 with panic spindle for door leaf thickness 47-51 mm	HA42S0000402000
protection rating 4 with panic spindle for door leaf thickness 52-56 mm	HA42S0000403000
protection rating 4 with panic spindle for door leaf thickness 57-61 mm	HA42S0000404000
protection rating 4 with panic spindle for door leaf thickness 62-66 mm	HA42S0000405000
protection rating 4 with panic spindle for door leaf thickness 67-71 mm	HA42S0000406000
protection rating 4 with panic spindle for door leaf thickness 72-76 mm	HA42S0000407000
protection rating 4 with panic spindle for door leaf thickness 77-81 mm	HA42S0000408000
protection rating 4 with panic spindle for door leaf thickness 82-86 mm	HA42S0000409000
protection rating 4 with panic spindle for door leaf thickness 87-91 mm	HA42S0000410000
protection rating 4 with panic spindle for door leaf thickness 92-96 mm	HA42S0000411000
protection rating 4 with panic spindle for door leaf thickness 97-101 mm	HA42S0000412000

Mounting set 12c

Mounting set narrow style long plate half spindle SK4

Technical attributes	
Handle spindle	9 mm
Screw size	2x M8 1x M6
Spindle type	Half spindle



Article / Feature	Order no.
protection rating 4 with spindle 9 mm for door leaf thickness 37-41 mm	HA42S0000413000
protection rating 4 with spindle 9 mm for door leaf thickness 42-46 mm	HA42S0000414000
protection rating 4 with spindle 9 mm for door leaf thickness 47-51 mm	HA42S0000415000
protection rating 4 with spindle 9 mm for door leaf thickness 52-56 mm	HA42S0000416000
protection rating 4 with spindle 9 mm for door leaf thickness 57-61 mm	HA42S0000417000
protection rating 4 with spindle 9 mm for door leaf thickness 62-66 mm	HA42S0000418000
protection rating 4 with spindle 9 mm for door leaf thickness 67-71 mm	HA42S0000419000
protection rating 4 with spindle 9 mm for door leaf thickness 72-76 mm	HA42S0000420000
protection rating 4 with spindle 9 mm for door leaf thickness 77-81 mm	HA42S0000421000
protection rating 4 with spindle 9 mm for door leaf thickness 82-86 mm	HA42S0000422000
protection rating 4 with spindle 9 mm for door leaf thickness 87-91 mm	HA42S0000423000
protection rating 4 with spindle 9 mm for door leaf thickness 92-96 mm	HA42S0000424000
protection rating 4 with spindle 9 mm for door leaf thickness 97-101 mm	HA42S0000425000

Fittings

Panic spindle and rose set

Half spindle, non panic side



Technical attributes

Handle spindle	9 mm
Spindle type	Half pin

Article / Feature

Article / Feature	Order no.
for passive leaf lock, length 9x45 mm	H A X 0 Z 0 0 0 0 0 0 1 0 0 0
for passive leaf lock, length 9x55 mm	H A X 0 Z 0 0 0 0 0 0 2 0 0 0
for passive leaf lock, length 9x65 mm	H A X 0 Z 0 0 0 0 0 0 3 0 0 0
for passive leaf lock, length 9x75 mm	H A X 0 Z 0 0 0 0 0 0 4 0 0 0
for passive leaf lock, length 9x90 mm	H A X 0 Z 0 0 0 0 0 0 5 0 0 0
for passive leaf lock, length 9x110 mm	H A X 0 Z 0 0 0 0 0 0 6 0 0 0

Half spindle, panic side



Technical attributes

Handle spindle	9 mm
Spindle type	Half pin

Article / Feature

Article / Feature	Order no.
for panic side length 9x45 mm	H A X 0 Z 0 0 0 0 0 0 7 0 0 0
for panic side length 9x55 mm	H A X 0 Z 0 0 0 0 0 0 8 0 0 0
for panic side length 9x65 mm	H A X 0 Z 0 0 0 0 0 0 9 0 0 0
for panic side length 9x75 mm	H A X 0 Z 0 0 0 0 0 1 0 0 0 0
for panic side length 9x90 mm	H A X 0 Z 0 0 0 0 0 1 1 0 0 0
for panic side length 9x110 mm	H A X 0 Z 0 0 0 0 0 1 2 0 0 0

Roses, single



Technical attributes

Rose	Rose pairs as individual parts
------	--------------------------------

Article / Feature

Article / Feature	Order no.
oval for narrow style 782 PC	H A X 0 Z 0 0 0 0 0 1 4 0 0 0
round for wide style doors 835 PC	H A X 0 Z 0 0 0 0 0 1 3 0 0 0

Fittings

Panic spindle and rose set

Solid spindle, 8 mm



Technical attributes

Handle spindle	8 mm
Spindle type	Spindle

Article / Feature

Order no.

8 mm spindle length 90 mm	H A X 0 Z 0 0 0 0 0 1 5 0 0 0
8 mm spindle length 110 mm	H A X 0 Z 0 0 0 0 0 1 6 0 0 0
8 mm spindle length 170 mm	H A X 0 Z 0 0 0 0 0 1 9 0 0 0
8 mm spindle length 190 mm	H A X 0 Z 0 0 0 0 0 2 0 0 0 0

Solid spindle, 9 mm



Technical attributes

Handle spindle	9 mm
Spindle type	Spindle

Article / Feature

Order no.

9 mm spindle length 90 mm	H A X 0 Z 0 0 0 0 0 2 1 0 0 0
9 mm spindle length 110 mm	H A X 0 Z 0 0 0 0 0 2 2 0 0 0
9 mm spindle length 130 mm	H A X 0 Z 0 0 0 0 0 2 3 0 0 0
9 mm spindle length 150 mm	H A X 0 Z 0 0 0 0 0 2 4 0 0 0
9 mm spindle length 170 mm	H A X 0 Z 0 0 0 0 0 2 5 0 0 0
9 mm spindle length 190 mm	H A X 0 Z 0 0 0 0 0 2 6 0 0 0

Knob spindle, 8 mm



Technical attributes

Handle spindle	8 mm
Spindle type	Half spindle

Article / Feature

Order no.

8 mm spindle length 70 mm	H A X 0 Z 0 0 0 0 0 2 7 0 0 0
8 mm spindle length 90 mm	H A X 0 Z 0 0 0 0 0 2 8 0 0 0
8 mm spindle length 110 mm	H A X 0 Z 0 0 0 0 0 2 9 0 0 0
8 mm spindle length 130 mm	H A X 0 Z 0 0 0 0 0 3 0 0 0 0
8 mm spindle length 150 mm	H A X 0 Z 0 0 0 0 0 3 1 0 0 0

Knob spindle, 9 mm



Technical attributes

Handle spindle	9 mm
Spindle type	Half spindle

Article / Feature

Order no.

9 mm spindle length 70 mm	H A X 0 Z 0 0 0 0 0 3 2 0 0 0
9 mm spindle length 90 mm	H A X 0 Z 0 0 0 0 0 3 3 0 0 0
9 mm spindle length 110 mm	H A X 0 Z 0 0 0 0 0 3 4 0 0 0
9 mm spindle length 130 mm	H A X 0 Z 0 0 0 0 0 3 5 0 0 0
9 mm spindle length 150 mm	H A X 0 Z 0 0 0 0 0 3 6 0 0 0



Explanations of standards
and classifications

Standards and classifications



Suitable for use on escape doors in accordance with EN 179:

Fittings for escape doors must minimise the risk of injury to refugees by means of a predefined geometry in accordance with EN 179.

Fittings marked with this symbol in this catalogue fully comply with this requirement and may be used on doors along escape routes.



Burglary resistance in accordance with EN 1906:

In addition to general requirements for long-term function, corrosion resistance and fire resistance, EN 1906 also regulates burglary protection in a total of 5 protection ratings.

Classification takes place from SK 0 (not burglary-resistant) to SK 4 (extremely burglary-resistant).

In our range you will find fittings with the classifications SK 2 to SK 4.

Fittings marked with this symbol in this catalogue all have a burglary-resistant function.



Fire protection fittings in accordance with DIN 18273:

ASSA ABLOY fire protection fittings are manufactured in accordance with the strict requirements of this standard and are thus suitable for use on fire and smoke protection doors.

Fittings marked with these symbols in this catalogue comply with the specifications that the fire behaviour and the permanent function of the door are not impaired when mounted and used as intended.



Classification code

following DIN EN 1906

Classification code e.g.
| 4 | 7* | - | B1 | 1 | 5 | 0 | B |
(as per 2012)

Classification code	Digit	Possible class	Class	Meaning of the class
Category of use	1st	1 to 4	1	Medium frequency of use by persons with high incentive to exercise care, small chance of misuse (e.g. internal residential doors)
			2	Medium frequency of use by persons with high incentive to exercise care, some chance of misuse (e.g. internal office doors)
			3	High frequency of use by the public or others with little incentive to exercise care and high chance of misuse (e.g. public office doors)
			4	High frequency of use on doors subject to frequent violent use or damage (e.g. doors in sports stadiums, barracks or public buildings)
Durability	2nd	6 to 7*	6	100.000 test cycles
			7	200.000 test cycles
			7*	1.000.000 test cycles
Test door mass	3rd	irrelevant	–	No classification defined
Fire resistance	4th	0, A, B, C or D	0	No performance defined
			A	Suitable for use on smoke door assemblies
			A1	as A, tested with 200.000 test cycles on a test door
			B	Suitable for use on smoke /fire door assemblies
			B1	as B, tested with 200.000 test cycles on a test door
			C	Suitable for use on smoke/fire door assemblies with requirements on fire protection inserts in the plate, door rosette and escutcheon
			C1	as C, tested with 200.000 cycles on a test door
			D	Suitable for use on smoke/fire door assemblies with requirements on a special handle core in the door handle/doorknob
			D1	as D, tested with 200.000 test cycles on a test door
Safety	5th	0 to 1	0	For normal use
			1	Safety requirements
Corrosion resistance	6th	0 to 5	0	No classification defined
			1	Low corrosion resistance (24h salt spray test)
			2	Moderate corrosion resistance (48h salt spray test)
			3	High corrosion resistance (96h salt spray test)
			4	Extremely high corrosion resistance (240h salt spray test)
			5	Extraordinarily high corrosion resistance (480h salt spray test)
Security (burglary resistance)	7th	0 to 4	0	No burglary resistant
			1	Low burglary resistance
			2	Moderate burglary resistance
			3	High burglary resistance
			4	Extra high burglary resistance
Type of operation	8th	A, B or U	A	Spring assisted furniture
			B	Spring loaded furniture
			U	Unsprung furniture

Fitting overview

Articel no. incl. classification code

Article no.	Classification code	Article no.	Classification code
H13300110900000	4/7*-B1150B	H13401150925000	4/7-B150A/B*
H13300150900000	4/7*-B1150B	H13401150926000	4/7-B150A/B*
H13300150930000	4/7*-B150U	H13401150931000	4/7*-B150U
H13301110910000	4/7-B150A/B*	H13401150932000	4/7*-B150U
H13301110920000	4/7-B150A/B*	H13401150933000	4/7*-B150U
H13301150910000	4/7-B150A/B*	H13401150934000	4/7*-B150U
H13301150920000	4/7-B150A/B*	H13401150935000	4/7*-B150U
H13301150930000	4/7*-B150U	H13401150936000	4/7*-B150U
H13302110910000	4/7-B150A/B*	H13402110910000	4/7-B150A/B*
H13302110920000	4/7-B150A/B*	H13402110920000	4/7-B150A/B*
H13302150910000	4/7-B150A/B*	H13402150910000	4/7-B150A/B*
H13302150920000	4/7-B150A/B*	H13402150920000	4/7-B150A/B*
H13302150930000	4/7*-B150U	H13402150931000	4/7*-B150U
H13400110901000	4/7*-B1150B	H13402150932000	4/7*-B150U
H13400110902000	4/7*-B1150B	H13402150933000	4/7*-B150U
H13400110903000	4/7*-B1150B	H13402150934000	4/7*-B150U
H13400110904000	4/7*-B1150B	H13402150935000	4/7*-B150U
H13400110905000	4/7*-B1150B	H13402150936000	4/7*-B150U
H13400110906000	4/7*-B1150B		
H13400150901000	4/7*-B1150B	H301001X0801000	4/7-B140A/B
H13400150902000	4/7*-B1150B	H301001X0802000	4/7-B140A/B
H13400150903000	4/7*-B1150B	H301001X0803000	4/7-B140A/B
H13400150904000	4/7*-B1150B	H301001X0804000	4/7-B140A/B
H13400150905000	4/7*-B1150B	H301001X0805000	4/7-B140A/B
H13400150906000	4/7*-B1150B	H301001X0806000	4/7-B140A/B
H13400150931000	4/7*-B150U	H301011X0811000	4/7-B140A/B
H13400150932000	4/7*-B150U	H301011X0812000	4/7-B140A/B
H13400150933000	4/7*-B150U	H301011X0813000	4/7-B140A/B
H13400150934000	4/7*-B150U	H301011X0814000	4/7-B140A/B
H13400150935000	4/7*-B150U	H301011X0815000	4/7-B140A/B
H13400150936000	4/7*-B150U	H301011X0816000	4/7-B140A/B
H13401110911000	4/7-B150A/B*	H301011X0821000	4/7-B140A/B
H13401110912000	4/7-B150A/B*	H301011X0822000	4/7-B140A/B
H13401110913000	4/7-B150A/B*	H301011X0823000	4/7-B140A/B
H13401110914000	4/7-B150A/B*	H301011X0824000	4/7-B140A/B
H13401110915000	4/7-B150A/B*	H301011X0825000	4/7-B140A/B
H13401110916000	4/7-B150A/B*	H301011X0826000	4/7-B140A/B
H13401110921000	4/7-B150A/B*	H301021X0811000	4/7-B140A/B
H13401110922000	4/7-B150A/B*	H301021X0812000	4/7-B140A/B
H13401110923000	4/7-B150A/B*	H301021X0813000	4/7-B140A/B
H13401110924000	4/7-B150A/B*	H301021X0814000	4/7-B140A/B
H13401110925000	4/7-B150A/B*	H301021X0815000	4/7-B140A/B
H13401110926000	4/7-B150A/B*	H301021X0816000	4/7-B140A/B
H13401150911000	4/7-B150A/B*	H301021X0821000	4/7-B140A/B
H13401150912000	4/7-B150A/B*	H301021X0822000	4/7-B140A/B
H13401150913000	4/7-B150A/B*	H301021X0823000	4/7-B140A/B
H13401150914000	4/7-B150A/B*	H301021X0824000	4/7-B140A/B
H13401150915000	4/7-B150A/B*	H301021X0825000	4/7-B140A/B
H13401150916000	4/7-B150A/B*	H301021X0826000	4/7-B140A/B
H13401150921000	4/7-B150A/B*	H302001X0800000	4/7-B140A/B
H13401150922000	4/7-B150A/B*	H302011X0810000	4/7-B140A/B
H13401150923000	4/7-B150A/B*	H302011X0820000	4/7-B140A/B
H13401150924000	4/7-B150A/B*	H302021X0810000	4/7-B140A/B

Fitting overview

Articel no. incl. classification code

Article no.	Classification code	Article no.	Classification code
H302021X0820000	4/7-B140A/B	H33101152831000	3/7-0152U
H33100110801000	4/7-B150A/B*	H33101152832000	3/7-0152U
H33100110802000	4/7-B150A/B*	H33101152833000	3/7-0152U
H33100110803000	4/7-B150A/B*	H33101152834000	3/7-0152U
H33100110804000	4/7-B150A/B*	H33101152835000	3/7-0152U
H33100110805000	4/7-B150A/B*	H33101152836000	3/7-0152U
H33100110806000	4/7-B150A/B*	H33101212831000	3/7-0152U
H33100112831000	3/7-0152U	H33101212832000	3/7-0152U
H33100112832000	3/7-0152U	H33101212833000	3/7-0152U
H33100112833000	3/7-0152U	H33101212834000	3/7-0152U
H33100112834000	3/7-0152U	H33101212835000	3/7-0152U
H33100112835000	3/7-0152U	H33101212836000	3/7-0152U
H33100112836000	3/7-0152U	H33101252831000	3/7-0152U
H33100150801000	4/7-B150A/B*	H33101252832000	3/7-0152U
H33100150802000	4/7-B150A/B*	H33101252833000	3/7-0152U
H33100150803000	4/7-B150A/B*	H33101252834000	3/7-0152U
H33100150804000	4/7-B150A/B*	H33101252835000	3/7-0152U
H33100150805000	4/7-B150A/B*	H33101252836000	3/7-0152U
H33100150806000	4/7-B150A/B*	H33102110810000	4/7-B150A/B*
H33100152831000	3/7-0152U	H33102110820000	4/7-B150A/B*
H33100152832000	3/7-0152U	H33102112831000	3/7-0152U
H33100152833000	3/7-0152U	H33102112832000	3/7-0152U
H33100152834000	3/7-0152U	H33102112833000	3/7-0152U
H33100152835000	3/7-0152U	H33102112834000	3/7-0152U
H33100152836000	3/7-0152U	H33102112835000	3/7-0152U
H33100212831000	3/7-0152U	H33102112836000	3/7-0152U
H33100212832000	3/7-0152U	H33102150810000	4/7-B150A/B*
H33100212833000	3/7-0152U	H33102150820000	4/7-B150A/B*
H33100212834000	3/7-0152U	H33102152831000	3/7-0152U
H33100212835000	3/7-0152U	H33102152832000	3/7-0152U
H33100212836000	3/7-0152U	H33102152833000	3/7-0152U
H33100252831000	3/7-0152U	H33102152834000	3/7-0152U
H33100252832000	3/7-0152U	H33102152835000	3/7-0152U
H33100252833000	3/7-0152U	H33102152836000	3/7-0152U
H33100252834000	3/7-0152U	H33102212831000	3/7-0152U
H33100252835000	3/7-0152U	H33102212832000	3/7-0152U
H33100252836000	3/7-0152U	H33102212833000	3/7-0152U
H33101110810000	4/7-B150A/B*	H33102212834000	3/7-0152U
H33101110820000	4/7-B150A/B*	H33102212835000	3/7-0152U
H33101110831000	4/7*-B150U	H33102212836000	3/7-0152U
H33101110832000	4/7*-B150U	H33102252831000	3/7-0152U
H33101110833000	4/7*-B150U	H33102252832000	3/7-0152U
H33101110834000	4/7*-B150U	H33102252833000	3/7-0152U
H33101110835000	4/7*-B150U	H33102252834000	3/7-0152U
H33101110836000	4/7*-B150U	H33102252835000	3/7-0152U
H33101112831000	3/7-0152U	H33102252836000	3/7-0152U
H33101112832000	3/7-0152U	H33200110800000	4/7-B150A/B*
H33101112833000	3/7-0152U	H33200112830000	3/7-0152U
H33101112834000	3/7-0152U	H33200150800000	4/7-B150A/B*
H33101112835000	3/7-0152U	H33200152830000	3/7-0152U
H33101112836000	3/7-0152U	H33200212830000	3/7-0152U
H33101150810000	4/7-B150A/B*	H33200252830000	3/7-0152U
H33101150820000	4/7-B150A/B*	H33201110810000	4/7-B150A/B*

Fitting overview

Articel no. incl. classification code

Article no.	Classification code	Article no.	Classification code
H33201110820000	4/7-B150A/B*	H501011X0922000	4/7-B140A/B
H33201112830000	3/7-0152U	H501011X0923000	4/7-B140A/B
H33201150810000	4/7-B150A/B*	H501011X0924000	4/7-B140A/B
H33201150820000	4/7-B150A/B*	H501011X0925000	4/7-B140A/B
H33201152830000	3/7-0152U	H501011X0926000	4/7-B140A/B
H33201212830000	3/7-0152U	H501021X0911000	4/7-B140A/B
H33201252830000	3/7-0152U	H501021X0912000	4/7-B140A/B
H33202110810000	4/7-B150A/B*	H501021X0913000	4/7-B140A/B
H33202110820000	4/7-B150A/B*	H501021X0914000	4/7-B140A/B
H33202112830000	3/7-0152U	H501021X0915000	4/7-B140A/B
H33202150810000	4/7-B150A/B*	H501021X0916000	4/7-B140A/B
H33202150820000	4/7-B150A/B*	H501021X0921000	4/7-B140A/B
H33202152830000	3/7-0152U	H501021X0922000	4/7-B140A/B
H33202212830000	3/7-0152U	H501021X0923000	4/7-B140A/B
H33202252830000	3/7-0152U	H501021X0924000	4/7-B140A/B
H3810X1X0811000	4/7-B140A/B	H501021X0925000	4/7-B140A/B
H3810X1X0812000	4/7-B140A/B	H501021X0926000	4/7-B140A/B
H3810X1X0813000	4/7-B140A/B	H502001X0900000	4/7-B140A/B
H3810X1X0814000	4/7-B140A/B	H502011X0910000	4/7-B140A/B
H3810X1X0815000	4/7-B140A/B	H502011X0920000	4/7-B140A/B
H3810X1X0816000	4/7-B140A/B	H502021X0910000	4/7-B140A/B
H3810X1X0821000	4/7-B140A/B	H502021X0920000	4/7-B140A/B
H3810X1X0822000	4/7-B140A/B	H51100110901000	4/7-B140A/B
H3810X1X0823000	4/7-B140A/B	H51100110902000	4/7-B140A/B
H3810X1X0824000	4/7-B140A/B	H51100110903000	4/7-B140A/B
H3810X1X0825000	4/7-B140A/B	H51100110904000	4/7-B140A/B
H3810X1X0826000	4/7-B140A/B	H51100110905000	4/7-B140A/B
H3820X1X0810000	4/7-B140A/B	H51100110906000	4/7-B140A/B
H3820X1X0820000	4/7-B140A/B	H51101110911000	4/7-B140A/B
		H51101110912000	4/7-B140A/B
		H51101110913000	4/7-B140A/B
H43200150900000	4/7-0140U	H51101110914000	4/7-B140A/B
H43201150900000	4/7-0140U	H51101110915000	4/7-B140A/B
H43202150900000	4/7-0140U	H51101110916000	4/7-B140A/B
H4Z1001X0900000	4/7-B150A	H51101110921000	4/7-B140A/B
H4Z1011X0900000	4/7-B150A	H51101110922000	4/7-B140A/B
H4Z1021X0900000	4/7-B150A	H51101110923000	4/7-B140A/B
H4Z2001X0900000	4/7-B150A	H51101110924000	4/7-B140A/B
H4Z2011X0900000	4/7-B150A	H51101110925000	4/7-B140A/B
H4Z2021X0900000	4/7-B150A	H51101110926000	4/7-B140A/B
		H51102110911000	4/7-B140A/B
H501001X0901000	4/7-B140A/B	H51102110912000	4/7-B140A/B
H501001X0902000	4/7-B140A/B	H51102110913000	4/7-B140A/B
H501001X0903000	4/7-B140A/B	H51102110914000	4/7-B140A/B
H501001X0904000	4/7-B140A/B	H51102110915000	4/7-B140A/B
H501001X0905000	4/7-B140A/B	H51102110916000	4/7-B140A/B
H501001X0906000	4/7-B140A/B	H51102110921000	4/7-B140A/B
H501011X0911000	4/7-B140A/B	H51102110922000	4/7-B140A/B
H501011X0912000	4/7-B140A/B	H51102110923000	4/7-B140A/B
H501011X0913000	4/7-B140A/B	H51102110924000	4/7-B140A/B
H501011X0914000	4/7-B140A/B	H51102110925000	4/7-B140A/B
H501011X0915000	4/7-B140A/B	H51102110926000	4/7-B140A/B
H501011X0916000	4/7-B140A/B	H51200110900000	4/7-B140A/B
H501011X0921000	4/7-B140A/B		

Fitting overview

Articel no. incl. classification code

Article no.	Classification code	Article no.	Classification code
H51201110910000	4/7-B140A/B	H704011X0923000	4/7-B140A/B
H51201110920000	4/7-B140A/B	H704011X0924000	4/7-B140A/B
H51202110910000	4/7-B140A/B	H704011X0925000	4/7-B140A/B
H51202110920000	4/7-B140A/B	H704011X0926000	4/7-B140A/B
		H704021X0911000	4/7-B140A/B
H63300150900000	4/7-0140U	H704021X0912000	4/7-B140A/B
H63301150900000	4/7-0140U	H704021X0913000	4/7-B140A/B
H63302150900000	4/7-0140U	H704021X0914000	4/7-B140A/B
H63400150900000	4/7-0140U	H704021X0915000	4/7-B140A/B
H63401150900000	4/7-0140U	H704021X0916000	4/7-B140A/B
H63402150900000	4/7-0140U	H704021X0921000	4/7-B140A/B
H63700150900000	4/7-0140U	H704021X0922000	4/7-B140A/B
H63701150900000	4/7-0140U	H704021X0923000	4/7-B140A/B
H63702150900000	4/7-0140U	H704021X0924000	4/7-B140A/B
H63800150900000	4/7-0140U	H704021X0925000	4/7-B140A/B
H63801150900000	4/7-0140U	H704021X0926000	4/7-B140A/B
H63802150900000	4/7-0140U	H71300110900000	4/7-B140A/B
H67303XZ09000000	4/7-0140U	H71301110910000	4/7-B140A/B
H67403XZ09000000	4/7-0140U	H71301110920000	4/7-B140A/B
H67603XZ09000000	4/7-0140U	H71302110910000	4/7-B140A/B
H67703XZ09000000	4/7-0140U	H71302110920000	4/7-B140A/B
H6Z3001X09000000	4/7-B150A	H71400110901000	4/7-B140A/B
H6Z3011X09000000	4/7-B150A	H71400110902000	4/7-B140A/B
H6Z3021X09000000	4/7-B150A	H71400110903000	4/7-B140A/B
H6Z4001X09000000	4/7-B150A	H71400110904000	4/7-B140A/B
H6Z4011X09000000	4/7-B150A	H71400110905000	4/7-B140A/B
H6Z4021X09000000	4/7-B150A	H71400110906000	4/7-B140A/B
H6Z7001X09000000	4/7-B150A	H71401110911000	4/7-B140A/B
H6Z7011X09000000	4/7-B150A	H71401110912000	4/7-B140A/B
H6Z7021X09000000	4/7-B150A	H71401110913000	4/7-B140A/B
H6Z8001X09000000	4/7-B150A	H71401110914000	4/7-B140A/B
H6Z8011X09000000	4/7-B150A	H71401110915000	4/7-B140A/B
H6Z8021X09000000	4/7-B150A	H71401110916000	4/7-B140A/B
		H71401110921000	4/7-B140A/B
H703001X09000000	4/7-B140A/B	H71401110922000	4/7-B140A/B
H703011X09100000	4/7-B140A/B	H71401110923000	4/7-B140A/B
H703011X09200000	4/7-B140A/B	H71401110924000	4/7-B140A/B
H703021X09100000	4/7-B140A/B	H71401110925000	4/7-B140A/B
H703021X09200000	4/7-B140A/B	H71401110926000	4/7-B140A/B
H704001X09010000	4/7-B140A/B	H71402110911000	4/7-B140A/B
H704001X09020000	4/7-B140A/B	H71402110912000	4/7-B140A/B
H704001X09030000	4/7-B140A/B	H71402110913000	4/7-B140A/B
H704001X09040000	4/7-B140A/B	H71402110914000	4/7-B140A/B
H704001X09050000	4/7-B140A/B	H71402110915000	4/7-B140A/B
H704001X09060000	4/7-B140A/B	H71402110916000	4/7-B140A/B
H704011X09110000	4/7-B140A/B	H71402110921000	4/7-B140A/B
H704011X09120000	4/7-B140A/B	H71402110922000	4/7-B140A/B
H704011X09130000	4/7-B140A/B	H71402110923000	4/7-B140A/B
H704011X09140000	4/7-B140A/B	H71402110924000	4/7-B140A/B
H704011X09150000	4/7-B140A/B	H71402110925000	4/7-B140A/B
H704011X09160000	4/7-B140A/B	H71402110926000	4/7-B140A/B
H704011X09210000	4/7-B140A/B	H77303XZ09400000	4/7*-B150U
H704011X09220000	4/7-B140A/B	H77303XZ09500000	4/7*-B150U

Fitting overview

Articel no. incl. classification code

Article no.	Classification code	Article no.	Classification code
H77403XZ0941000	4/7*-B150U	H93301113930000	4/7-B153U
H77403XZ0942000	4/7*-B150U	H93301153930000	4/7-B153U
H77403XZ0943000	4/7*-B150U	H93301213930000	4/7-B153U
H77403XZ0944000	4/7*-B150U	H93301214910000	4/7*-B154U/B
H77403XZ0945000	4/7*-B150U	H93301214920000	4/7*-B154U/B
H77403XZ0946000	4/7*-B150U	H93301253930000	4/7-B153U
H77403XZ0951000	4/7*-B150U	H93301254910000	4/7*-B154U/B
H77403XZ0952000	4/7*-B150U	H93301254920000	4/7*-B154U/B
H77403XZ0953000	4/7*-B150U	H93302113930000	4/7-B153U
H77403XZ0954000	4/7*-B150U	H93302153930000	4/7-B153U
H77403XZ0955000	4/7*-B150U	H93302213930000	4/7-B153U
H77403XZ0956000	4/7*-B150U	H93302214910000	4/7*-B154U/B
H77603XZ0940000	4/7*-B150U	H93302214920000	4/7*-B154U/B
H77603XZ0950000	4/7*-B150U	H93302253930000	4/7-B153U
H77703XZ0940000	4/7*-B150U	H93302254910000	4/7*-B154U/B
H77703XZ0950000	4/7*-B150U	H93302254920000	4/7*-B154U/B
		H93400113931000	4/7-B153U
H83300153900000	4/7-B143B	H93400113932000	4/7-B153U
H83300253900000	4/7-B153U	H93400113933000	4/7-B153U
H83300254930000	4/7*-B154B	H93400113934000	4/7-B153U
H83301153900000	4/7-B143B	H93400113935000	4/7-B153U
H83301253900000	4/7-B153U	H93400113936000	4/7-B153U
H83301254930000	4/7*-B154B	H93400153931000	4/7-B153U
H83302153900000	4/7-B153U	H93400153932000	4/7-B153U
H83302253900000	4/7-B153U	H93400153933000	4/7-B153U
H83302254930000	4/7*-B154B	H93400153934000	4/7-B153U
H83700153900000	4/7-B143B	H93400153935000	4/7-B153U
H83700253900000	4/7-B153U	H93400153936000	4/7-B153U
H83700254930000	4/7*-B154B	H93400213931000	4/7-B153U
H83701153900000	4/7-B143B	H93400213932000	4/7-B153U
H83701253900000	4/7-B153U	H93400213933000	4/7-B153U
H83701254930000	4/7*-B154B	H93400213934000	4/7-B153U
H83702153900000	4/7-B153U	H93400213935000	4/7-B153U
H83702253900000	4/7-B153U	H93400213936000	4/7-B153U
H83702254930000	4/7*-B154B	H93400214911000	4/7*-B154U/B
H83800153900000	4/7-B153U	H93400214912000	4/7*-B154U/B
H83800253900000	4/7-B143B	H93400214913000	4/7*-B154U/B
H83800254930000	4/7*-B154B	H93400214914000	4/7*-B154U/B
H83801153900000	4/7-B143B	H93400214915000	4/7*-B154U/B
H83801253900000	4/7-B143B	H93400214916000	4/7*-B154U/B
H83801254930000	4/7*-B154U/B	H93400214921000	4/7*-B154U/B
H83802153900000	4/7-B153U	H93400214922000	4/7*-B154U/B
H83802253900000	4/7-B153U	H93400214923000	4/7*-B154U/B
H83802254930000	4/7*-B154U/B	H93400214924000	4/7*-B154U/B
		H93400214925000	4/7*-B154U/B
H93300113930000	4/7-B153U	H93400214926000	4/7*-B154U/B
H93300153930000	4/7-B153U	H93400253931000	4/7-B153U
H93300213930000	4/7-B153U	H93400253932000	4/7-B153U
H93300214910000	4/7*-B154U/B	H93400253933000	4/7-B153U
H93300214920000	4/7*-B154U/B	H93400253934000	4/7-B153U
H93300253930000	4/7-B153U	H93400253935000	4/7-B153U
H93300254910000	4/7*-B154U/B	H93400253936000	4/7-B153U
H93300254920000	4/7*-B154U/B	H93400254911000	4/7*-B154U/B

Fitting overview

Articel no. incl. classification code

Article no.	Classification code	Article no.	Classification code
H93400254912000	4/7*-B154U/B	H93401254921000	4/7*-B154U/B
H93400254913000	4/7*-B154U/B	H93401254922000	4/7*-B154U/B
H93400254914000	4/7*-B154U/B	H93401254923000	4/7*-B154U/B
H93400254915000	4/7*-B154U/B	H93401254924000	4/7*-B154U/B
H93400254916000	4/7*-B154U/B	H93401254925000	4/7*-B154U/B
H93400254921000	4/7*-B154U/B	H93401254926000	4/7*-B154U/B
H93400254922000	4/7*-B154U/B	H93402113931000	4/7-B153U
H93400254923000	4/7*-B154U/B	H93402113932000	4/7-B153U
H93400254924000	4/7*-B154U/B	H93402113933000	4/7-B153U
H93400254925000	4/7*-B154U/B	H93402113934000	4/7-B153U
H93400254926000	4/7*-B154U/B	H93402113935000	4/7-B153U
H93401113931000	4/7-B153U	H93402113936000	4/7-B153U
H93401113932000	4/7-B153U	H93402153931000	4/7-B153U
H93401113933000	4/7-B153U	H93402153932000	4/7-B153U
H93401113934000	4/7-B153U	H93402153933000	4/7-B153U
H93401113935000	4/7-B153U	H93402153934000	4/7-B153U
H93401113936000	4/7-B153U	H93402153935000	4/7-B153U
H93401153931000	4/7-B153U	H93402153936000	4/7-B153U
H93401153932000	4/7-B153U	H93402213931000	4/7-B153U
H93401153933000	4/7-B153U	H93402213932000	4/7-B153U
H93401153934000	4/7-B153U	H93402213933000	4/7-B153U
H93401153935000	4/7-B153U	H93402213934000	4/7-B153U
H93401153936000	4/7-B153U	H93402213935000	4/7-B153U
H93401213931000	4/7-B153U	H93402213936000	4/7-B153U
H93401213932000	4/7-B153U	H93402214911000	4/7*-B154U/B
H93401213933000	4/7-B153U	H93402214912000	4/7*-B154U/B
H93401213934000	4/7-B153U	H93402214913000	4/7*-B154U/B
H93401213935000	4/7-B153U	H93402214914000	4/7*-B154U/B
H93401213936000	4/7-B153U	H93402214915000	4/7*-B154U/B
H93401214911000	4/7*-B154U/B	H93402214916000	4/7*-B154U/B
H93401214912000	4/7*-B154U/B	H93402214921000	4/7*-B154U/B
H93401214913000	4/7*-B154U/B	H93402214922000	4/7*-B154U/B
H93401214914000	4/7*-B154U/B	H93402214923000	4/7*-B154U/B
H93401214915000	4/7*-B154U/B	H93402214924000	4/7*-B154U/B
H93401214916000	4/7*-B154U/B	H93402214925000	4/7*-B154U/B
H93401214921000	4/7*-B154U/B	H93402214926000	4/7*-B154U/B
H93401214922000	4/7*-B154U/B	H93402253931000	4/7-B153U
H93401214923000	4/7*-B154U/B	H93402253932000	4/7-B153U
H93401214924000	4/7*-B154U/B	H93402253933000	4/7-B153U
H93401214925000	4/7*-B154U/B	H93402253934000	4/7-B153U
H93401214926000	4/7*-B154U/B	H93402253935000	4/7-B153U
H93401253931000	4/7-B153U	H93402253936000	4/7-B153U
H93401253932000	4/7-B153U	H93402254911000	4/7*-B154U/B
H93401253933000	4/7-B153U	H93402254912000	4/7*-B154U/B
H93401253934000	4/7-B153U	H93402254913000	4/7*-B154U/B
H93401253935000	4/7-B153U	H93402254914000	4/7*-B154U/B
H93401253936000	4/7-B153U	H93402254915000	4/7*-B154U/B
H93401254911000	4/7*-B154U/B	H93402254916000	4/7*-B154U/B
H93401254912000	4/7*-B154U/B	H93402254921000	4/7*-B154U/B
H93401254913000	4/7*-B154U/B	H93402254922000	4/7*-B154U/B
H93401254914000	4/7*-B154U/B	H93402254923000	4/7*-B154U/B
H93401254915000	4/7*-B154U/B	H93402254924000	4/7*-B154U/B
H93401254916000	4/7*-B154U/B	H93402254925000	4/7*-B154U/B
		H93402254926000	4/7*-B154U/B

Manufacturer's declaration

Escape door fittings according to EN 179


The EN 179 regulates the requirements and test methods for locks and fittings for use as emergency exit locks with handles or push plates for doors in escape routes.

Fitting combinations within the meaning of EN 179 are to be assessed as building authority relevant products with the required EU or CE conformity marking. They consist of lock, fitting and accessories and must be tested and certified together.

ASSA ABLOY offers you a wide and comprehensive range of products with the corresponding tests and certifications for the hardware packages approved in combination with the EN 179 standard.

In this overview you will find an extensive selection of ASSA ABLOY fittings, certified and monitored by MPA NRW under the surveillance number DO 22.0-03, which meet the requirements of EN 179.

Relevant dimensions according to EN 179

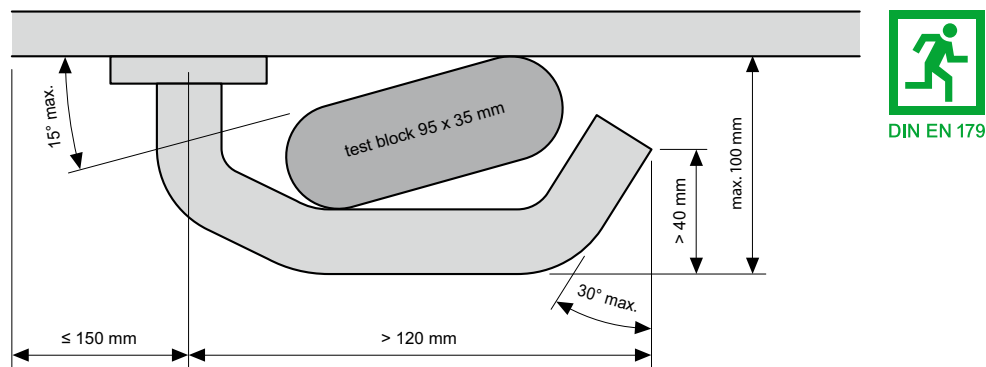

The handle models listed on the following page are available both as handle sets and knob sets on the following substructures:

- Rose fitting
- Short plate fitting
- Long plate fitting
- Oval rose fitting
- Long plate fitting for narrow style doors
- Security fittings for wide style and narrow style doors

[illegible]

Everything fits: components and systems for every door, for the complete building

There is always a crucial question for planners and architects relating to security technology for public and commercial building applications: When you put everything together, does it work as an ensemble? With the numerous different components and systems that can be used in a property, you must be sure that you

can answer 'Yes' to this question and it is confirmed in reality. From the locking system to access control and escape route technology, with ASSA ABLOY, all products, systems and solutions are harmonised so that they work reliably and in concert throughout the entire property.


MEDIATOR®

The multifunctional, self-locking locking solution for internal and external doors with integrated locking notification.



Electronic master key systems

eCLIQ is the new generation of electronic locking systems. It is based on the proven CLIQ technology used worldwide.

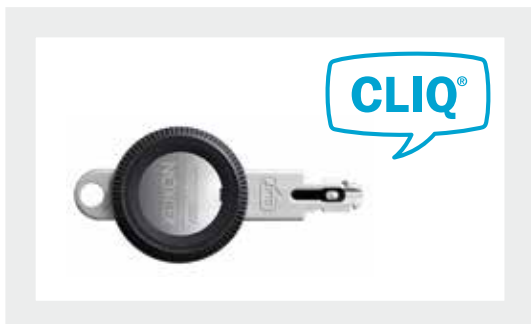

Mechanical locking systems

The IKON is a comprehensive type program of high-quality locking cylinders covering all areas of application in a building.



Escape route technology

Modern escape door control systems offer safety and security.



Only someone who understands the "door" system can offer the right solution for every requirement.

Our recommendation: ask your project consultant at ASSA ABLOY!

Regardless of the types of doors: single or double-leaf doors, internal doors, entrance or facade doors, fire doors, special doors or multifunctional doors, when it comes to products and solutions from ASSA ABLOY: everything fits!

Regardless of which special technologies and equipment are used. Of course, this also pertains to the sophisticated design, high product quality and the good price/performance ratio.



Door closer

A comprehensive series of door closers in reduced, consistent design covering nearly all applications.



Commercial and public building locks

OneSystem: an innovative program of mechanical locks specially designed for public and commercial building applications.



Electric strikes

Whether standard application, fire door or retrofitting: electric strikes offer the right solution.



Panic bars

Panic touch bars and panic push bars for use in smoke doors, fire doors and escape doors.

Quick and easy by email to
export.effeff@assaabloy.com

Customer no.:

Sender:

ASSA ABLOY
Sicherheitstechnik GmbH
Bildstockstrasse 20
72458 Albstadt
Germany
Tel. +49 7431 123-700

Company

Sector

Contact person

Telephone _____

E-mail

Street / Box no.

Post code / Town, city

Date:

[illegible]

As a proven partner, ASSA ABLOY Sicherheitstechnik is known for its rapid and reliable delivery of orders.

For orders: **export.effeff@assaabloy.com**

For enquiries: **export.effeff@assaabloy.com**

Offers and deliveries are subject to our Terms and Conditions of Sale and Delivery.

www.assaabloy.com/de

In the future we'll also meet the demands for technical advances and innovations. We therefore reserve the right to make design modifications.

Illustrations may thus also vary from the actual products.

Despite the greatest of care, printing errors or mistakes may be made. ASSA ABLOY accepts no responsibility in such cases and will not enter into any obligations of any kind.

No responsibility is taken for the correctness of any safety regulations reproduced.

The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

ASSA ABLOY
Opening Solutions

ASSA ABLOY
Sicherheitstechnik GmbH
Bildstockstrasse 20
72458 Albstadt
GERMANY
Tel. +49 7431 123-700
export.effeff@assaabloy.com
www.assaabloy.com/de/en/